



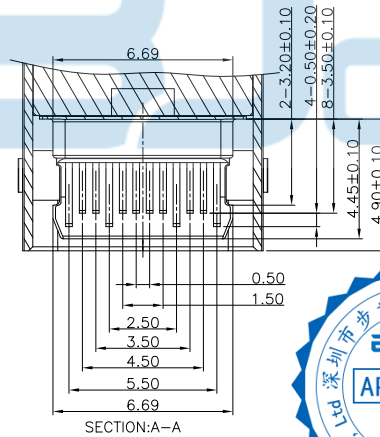

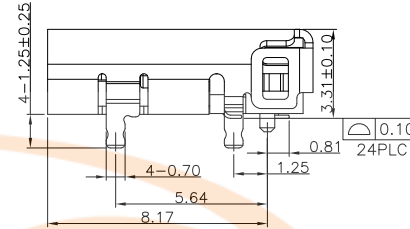




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		



NOTES:
SPECIFICATION:

- CURRENT RATING: 5A MAX
VOLTAGE RATING: 20V
- Dielectric Withstanding Voltage: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES




PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTxp	Positive half of first SuperSpeed TX differential pair	B11	SSRXp	Positive half of first SuperSpeed RX differential pair
A3	SSTxm	Negative half of first SuperSpeed TX differential pair	B10	SSRXm	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRX2	Negative half of second SuperSpeed TX differential pair	B3	SSTX2	Positive half of second SuperSpeed TX differential pair
A11	SSRX2	Positive half of second SuperSpeed TX differential pair	B2	SSTX2	Negative half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
	USB4 Gen3 USB TYPE C 24pin 母座	LCP	蓝色 端子镀半金锡1u"	
	USB4 Gen3 USB TYPE C 24pin 母座	PA9T	黑色 端子镀半金锡30u"	
UC. 01. 52-1L-0003	USB4 Gen3 USB TYPE C 24pin 母座	PA9T	黑色 端子镀半金锡1u"	
6	接地片	SUS316L T=0.12mm	No Plated	1PCS
5	中夹片	SUS301R-H T=0.15mm	No Plated	1PCS
4	SHELL	SUS304R-1/2H T=0.30mm	NI 50u" Plated	1PCS
3	CONTACT	C18400 T=0.12mm	Au, Sn SEE TABLE NI50u" Plated	1SET
2	CONTACT	C18400 T=0.12mm	Au, Sn SEE TABLE NI50u" Plated	1SET
1	HOUSING	PA9T	BLACK/BLUE	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

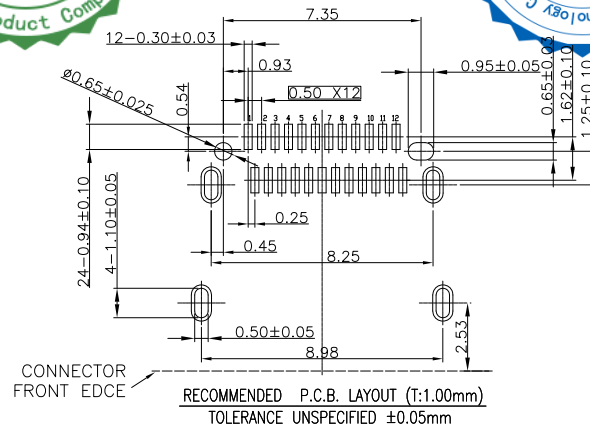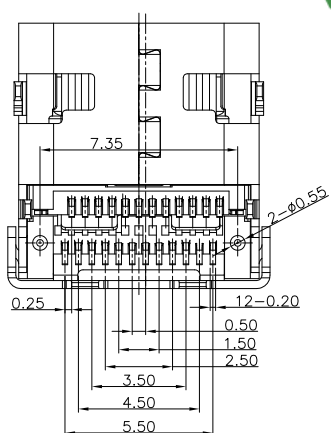

TOLERANCE UNSPECIFIED	
.0	±0.35
.00	±0.25
.000	±0.15
X. °	±2.00°
CUSTOMER DRAWING	




TITLE: USB4 Gen3 USB TYPE C 24pin 母座 错位双贴板上
外壳无弹 L=9.87 CH1.73 (CF151.1123.3H2)



DRAWN/ DATE	设计	HMY	SIZE:A4	UNIT:MM.	PART. NO:	UC. 01. 52-1L-0003
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准	LJP	DWG. PATH	0392-1	SHEET: 页码	



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

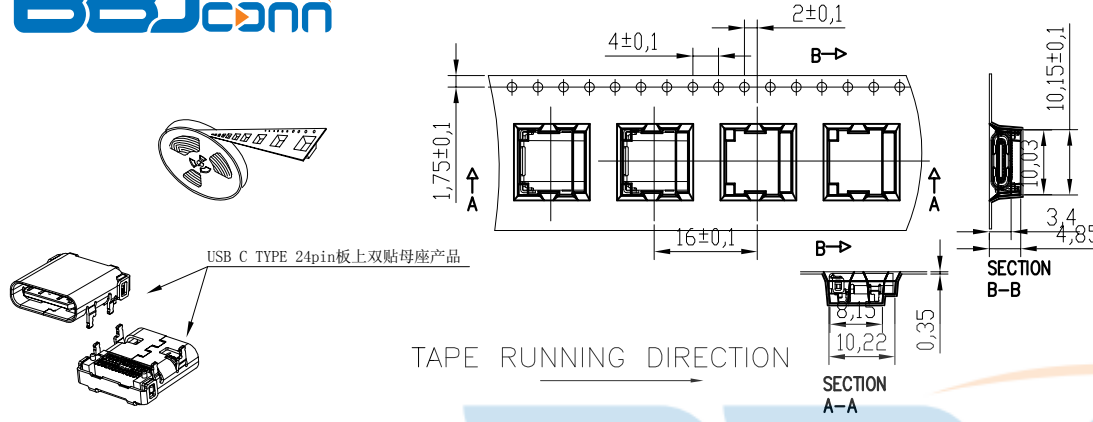

- NOTE: 1. 如图所示, 将1000pcs成品按规定方向置入载带中, 前后各空19PCS, 再将自沾带贴合, 并于卷盘上贴上盘面标签和ROHS标签各一张.
2. 纸箱封盖后以封箱胶封箱, 并于侧面贴上出货标签和ROHS标签;
3. 标签;若客户另有贴标签要求, 则按其订单注明之要求贴;
4. 外箱以封箱带绑固;若为出口包装, 请在每箱内套一防水袋.
5. 纸箱尺寸及印刷见包材图面.
未满足之零数箱, 需以缓冲材料填满.
6. 本包装方式适用产品: USB C TYPE 24Pin板上, 双贴母座
一箱装10卷/10000pcs产品 (总毛重仅作参考, 出货以实称为准)

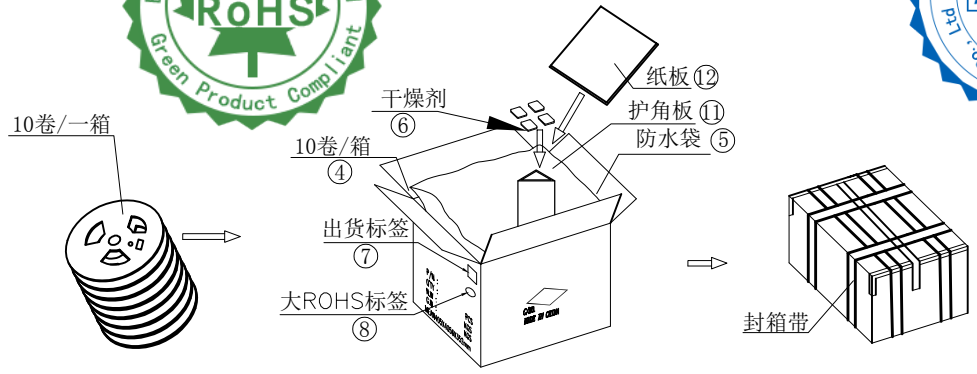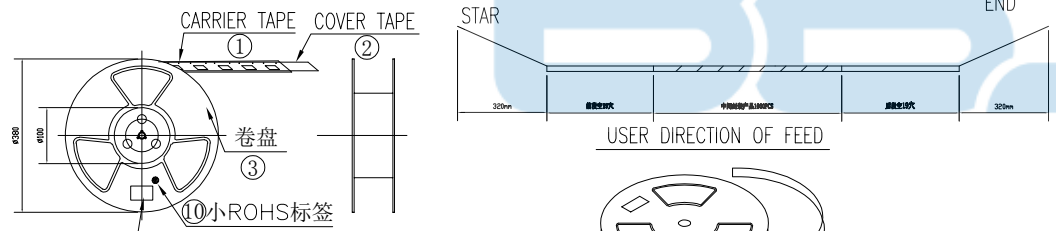

⑫	纸板	2	PCS	L332*W332mm T=3mm
⑪	护角板	4	PCS	L330*H270mm T=5mm
⑩	小ROHS标签	10	PCS	∅15.7
⑨	盘面标签	10	PCS	
⑧	大ROHS标签	1	PCS	∅40.0
⑦	出货标签	1	PCS	
⑥	干燥剂	5	BAG	
⑤	防水袋	1	PCS	
④	外纸箱	1	PCS	L405*405*352 K=K 内径
③	卷盘	10	SET	∅380*100mm, W=24mm
②	COVER TAPE	1000	10	PCS W=21.3mm, 13.2m/REEL
①	CARRIER TAPE			PCS W=24mm, T=0.35mm, L=16.6m/REEL
序号	包材名称	PCS/盘	盘/箱	单位
		包装总数量		备注

TOLERANCE UNSPECIFIED
 .0 ±0.35
 .00 ±0.25
 .000 ±0.15
 X.° ±2.00°
 CUSTOMER DRAWING

BBJconn 深圳市步步精科技有限公司

TITLE: USB4 Gen3 USB TYPE C 24pin 母座 错位双贴板上 外壳无弹 L=9.87 CH1.73 (CF151.1123.3H2)

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART. NO:	UC.01.52-1L-0003
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0392-1	SHEET: 页码	