



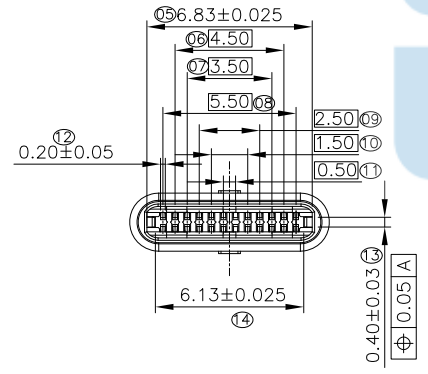


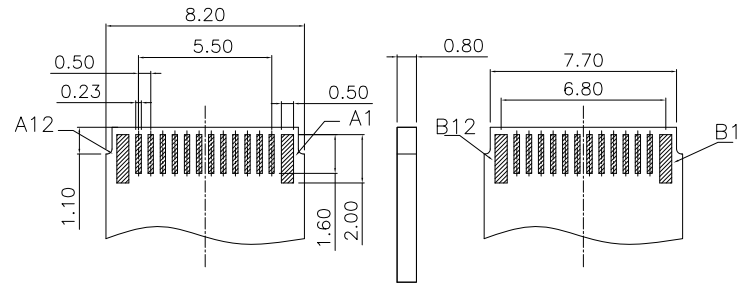

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

**SPECIFICATION**  
**MATERIAL**  
 See drawing  
**STANDARD DATA**  
 Rating current:5A  
**ELECTRICAL**  
 Insulator resistance:100Mohms Min.  
 Withstanding voltage:100VAC/minute  
 Contact resistance:40mohms Max  
**MECHANICAL**  
 Mating force:5~20N.  
 Unmating force:8~20N.  
 Durability:10000 cycles.  
 DRAWINGS MARKED "Ⓢ" FOR FAI DIMENSION.  
 DRAWINGS MARKED "Ⓣ" FOR CPK DIMENSION.  
 Contact area:Gold 1u". LCP black  
 Ni:Overall 50u";Solder area:Matte wu tin 100~180u"

RECOMMENDED PCB LAYOUT  
 GENERAL TOLERANCES:±0.05

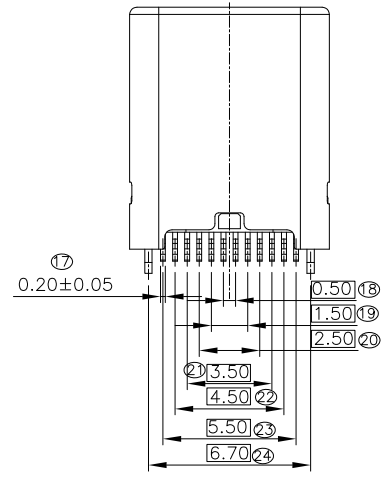

PARTS NAME	Q'TY	MATERIAL	FINISH/COLOR
Insert molding CONTACT	2	LCP E130i	C7025 Ni:50~80u" Tin100~180u" Au:1u "Min环保 蓝漆24H Black
CONTACT	2	C7025 TM02	Contact area:Gold 1u", Solder area:Matte tin 100~180u"
Insert molding EMI spring	2	LCP E130i	NO PLATED;Black
Emi spring	2	SUS301R-H	Clean (精)
LATCH	1	SUS301R-H	SUS 301R-H Ni:50u" Min Matte Tin: 100u"Min 环保 蓝漆24H
SHELL	1	SUS316L	Ni Overall 50u"min (精)

TOLERANCE UNSPECIFIED

0.	±0.30
0.0	±0.20
0.00	±0.15
0.°	±4°
0.0°	±3°

**BBJconn** 深圳市步步精科技有限公司

TITLE: TYPE C 24P 超薄 夹板式公头 H=10.0

DRAWN/ DATE	设计 TSP	SIZE: A4	UNIT: MM.	PART. NO: UC. 02. 72-4L-0001
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0392-1	SHEET: 页码

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	Vbus	SBU1	Dn1	DP1	CC	Vbus	TX1-	TX1+	GND
GND	TX2+	TX2-	Vbus	Vconn	DP2	Dn2	SBU2	Vbus	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

A

B

E

F

A

B


D

E

F



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

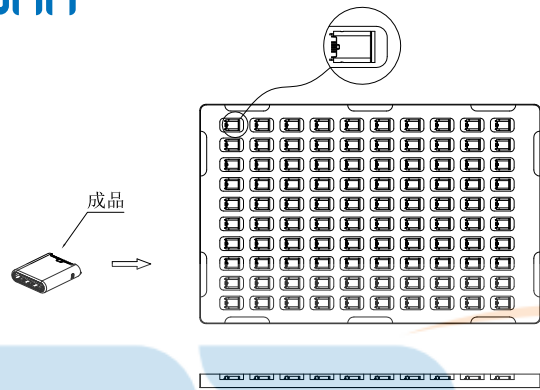

包装步骤说明:

1. 产品放入TRAY中, 100PCS 每盘, 如图1;
2. 30盘为一扎最上用一個底盖做面盖. (如图2);
3. 用PE膜粘捆. 如图3;
4. 干燥剂放置最上面吸塑盒上位置如图4;
5. 将整捆产品放入防水袋中, 然后将PE袋用透明胶帶封口;
6. 将装入防水袋的产品放入外箱中, 如图5;
7. 用透明帶以工字型方式封箱, 如图6;
8. 所有包装材料需符合RoHS 环境保护要求;
9. 290\*190\*240 表示纸箱内侧尺寸;

(出货以实称为准)

产品数量	产品单重	产品净重	总毛重
6000PCS	0.70g	4.20KG	以实际称重为准

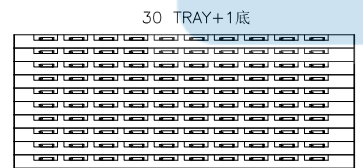


图2




图3





图4



⑥	外箱标签	1/6000	PCS	组装打印	
⑤	ROHS标签	1/6000	PCS		
④	干燥剂	4/6000	BAG		
③	PE防水袋	1/6000	PCS		
②	外纸箱	1/6000	PCS	L290*W190*H240mm, K=K	
①	吸塑盘	100	62	PCS L280*W180	
序号	包材名称	PCS/盘	盘/箱	单位	备注
		包装总数量			




图5

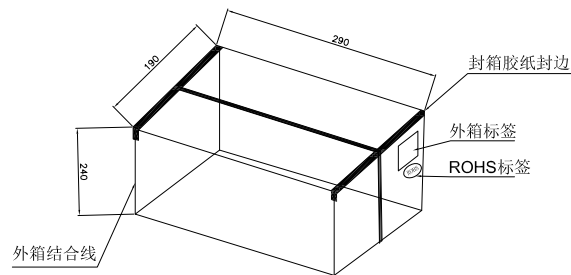


图6

深圳市步步精科技有限公司

TITLE: TYPE C 24P 超薄 夹板式公头 H=10.0

DRAWN/ DATE	设计	LYX	SIZE:A4	UNIT:MM.	PART. NO:	UC.02.72-4L-0001	REV.:	版本
CHECKED/ DATE	审核	HMY	SCALE:	1:1	PROJECTION			
APPROVED/ DATE	核准	LJP	DWG.	PATH		0392-1	SHEET:	页码