
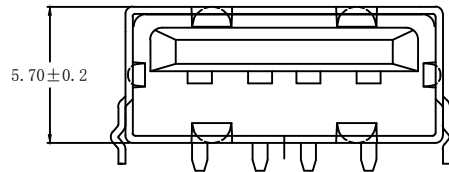


RECOMMENDED P.C.B LAYOUT

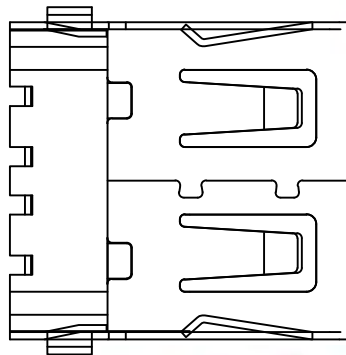

NOTE:

1. MATERIAL:

- a. HOUSING: PBT GLASS FIBRE
- b. CONTACT: PHOSPHOR BRONZE T=0.25mm
(SURFACE PLATING: Au1u"+Sn100u"+Ni60u")
- c. SHEEL: BRASS T=0.30mm / SPCC
(SURFACE PLATING: Ni 100u"~120u")

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE: -55??- 105??



TOLERANCE UNSPECIFIED

.0	±0.40
.00	±0.25
.000	±0.15
X. °	±0.3°
CUSTOMER DRAWING	

深圳市步步精科技有限公司





TITLE:

USB AF90度 沉板1.9 LCP 黑胶 平口 铜壳L=13.8 磷铜端子 DIP 麦拉

DRAWN/ DATE	设计 HMY	SIZE: A4	UNIT: MM.	PART. NO:	UB.01.32-12-V002
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1		SHEET: 页码



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

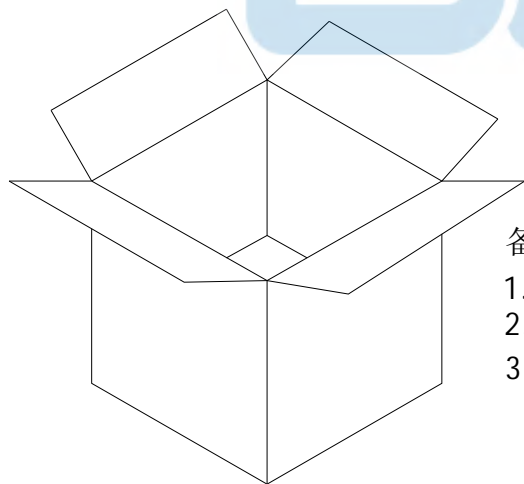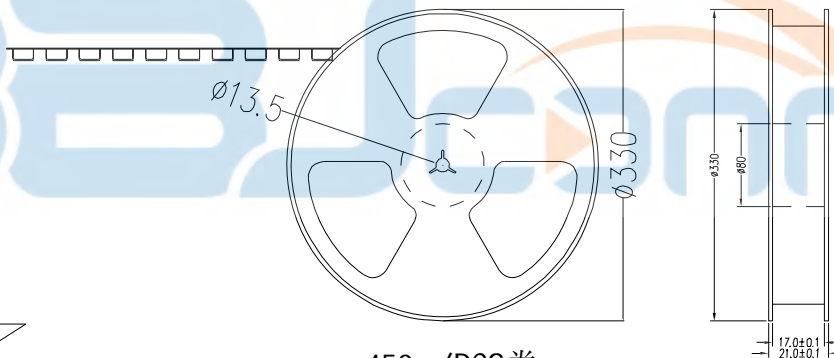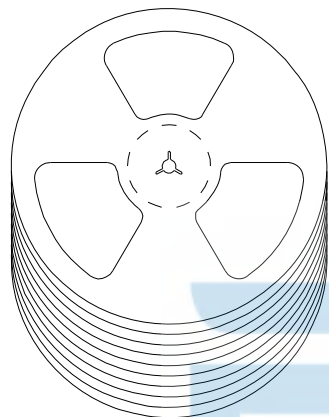

450 /PCS卷

备注:

1. 包装数量: 450 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

深圳市步步精科技有限公司

TOLERANCE UNSPECIFIED		TITLE:			
.0	±0.35	USB AF90度 沉板1.9 LCP 黑胶 平口 铜壳L=13.8 磷铜端子DIP 麦拉			
.00	±0.25	SIZE: A4	UNIT: MM.	PART. NO: UB.01.32-12-V002	
.000	±0.15	CHECKED/ DATE	SCALE: 1:1	PROJECTION	REV.: 版本
X. °	±2.00°	APPROVED/ DATE	DWG. PATH	0383-1	SHEET: 页码
CUSTOMER DRAWING					

DRAWN/ DATE	设计 HMY	SIZE: A4	UNIT: MM.	PART. NO: UB.01.32-12-V002	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1		SHEET: 页码