

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触电阻: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

1. 塑胶: Housing:
High Temperature Thermoplastics,

2. 端子: Contact: Copper Alloy C5191
3. 外壳: Shell: Copper Alloy C5191/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U”(MIN)镍, 镀金区域镀100-200U”镀金1U”




2. 外壳: Shell:
铜壳四周镀80U”(MIN)镍

Nickel Plating

深圳市步步精科技有限公司

TITLE: USB 2.0 AF 2.0侧插L=10.0磷铜壳磷端子平口LCP本色胶芯

.X±0.15 X.±5'		深圳市步步精科技有限公司				
.XX±0.05 .X±2'		TITLE: USB 2.0 AF 2.0侧插L=10.0磷铜壳磷端子平口LCP本色胶芯				
.XXX±0.02 .XX±1'		DRAWN/ DATE	设计 LYX	SIZE: A4	UNIT: MM.	PART. NO: UB.01.42-94-V001
		CHECKED/ DATE	审核 HMY	SCALE: 1:1	PROJECTION	REV.: 版本
		APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1	SHEET: 页码

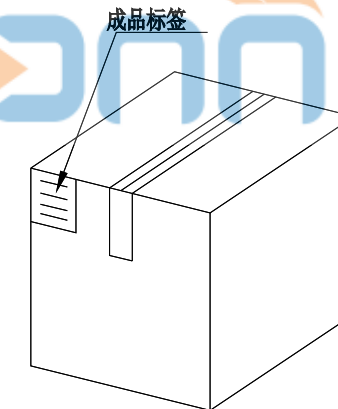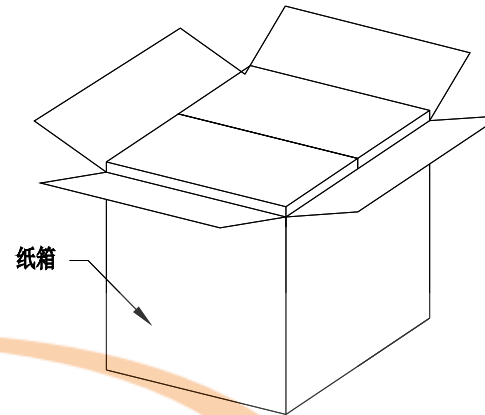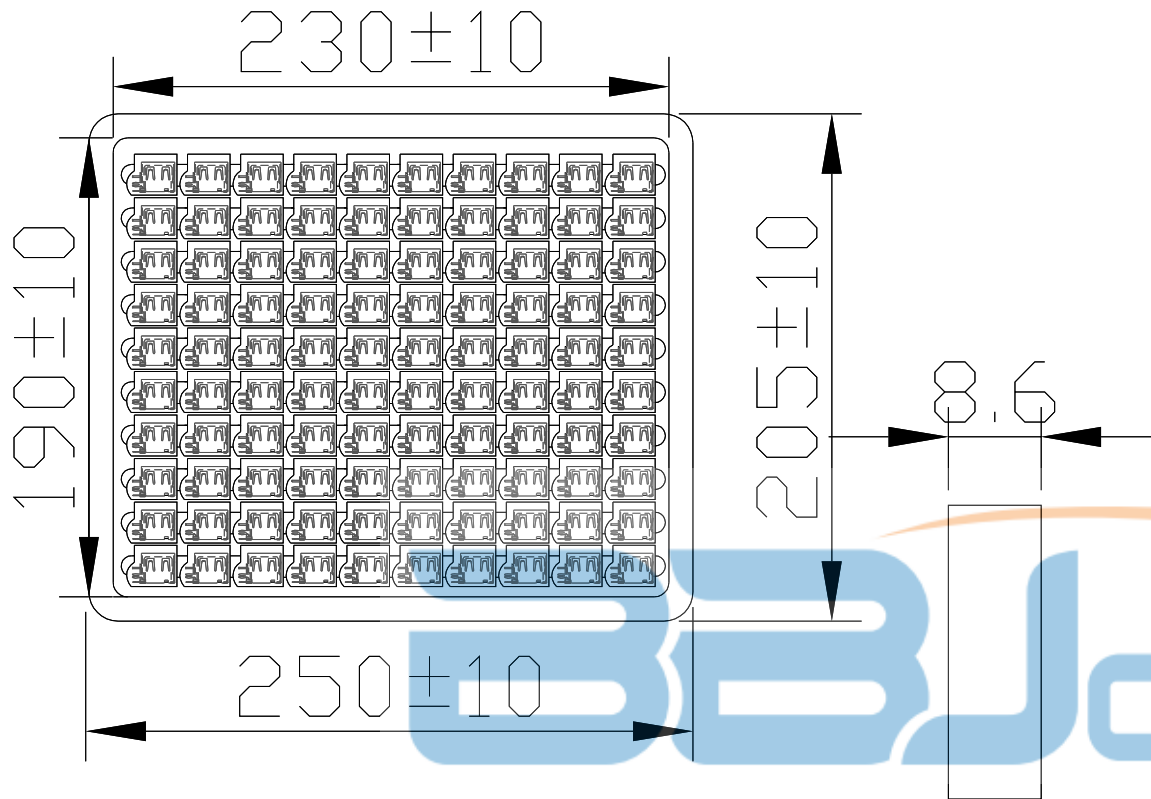

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签

纸箱规格: 350*210*290

深圳市步步精科技有限公司						
公差对照表		视角		批准	LJP	TITLE:USB 2.0 AF 2.0侧插L=10.0 磷铜壳磷端子平口LCP本色胶芯
尺寸范围	公差范围					
0~10	±0.1	单位		审核	YJF	PART NO: UB.01.42-94-V001
10~20	±0.2					
20~40	±0.3	比例		设计	YDH	0383-1
40~60	±0.5					
60~80	±0.5					
80~100	±1					
120~140	±1.5					