

| REV. | ECN NO. | CONTENT | DATE | ENGINEER |
|------|---------|---------|---------------|----------|
| AO | | | 2023 20/04 | |








Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: sus304,t=0.30mm

2.Specification:



- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

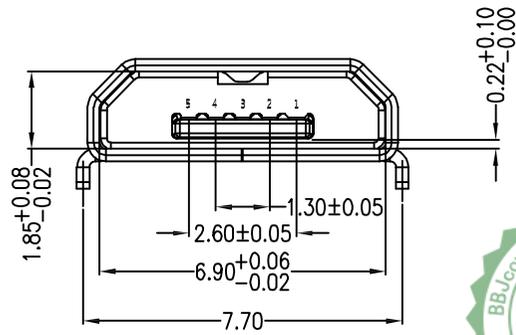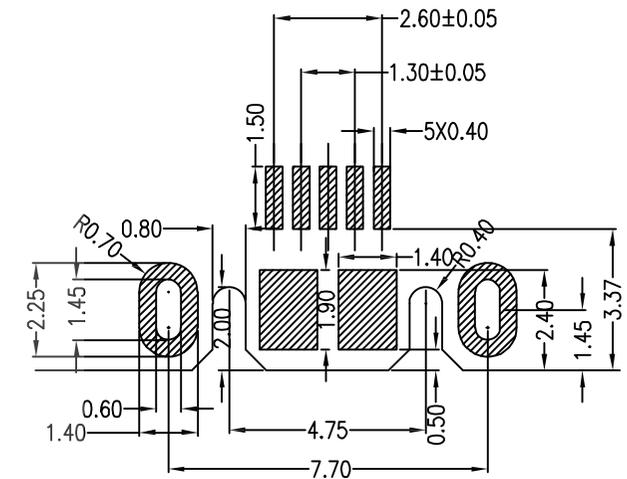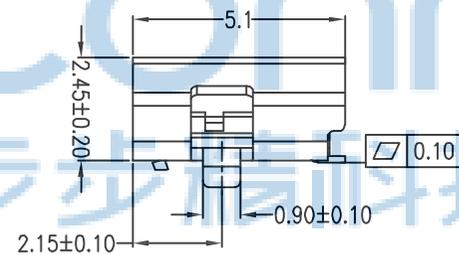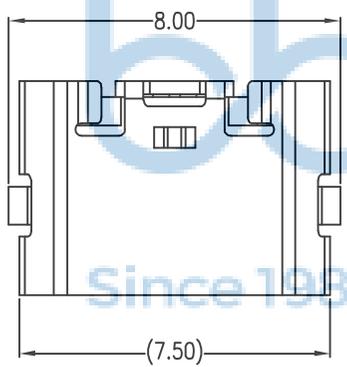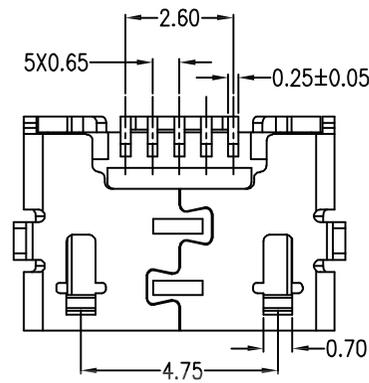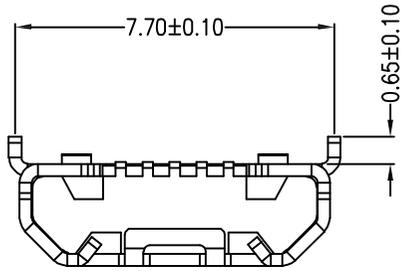

PCB LAYOUT
PCB圖僅做參考

| | | | | | |
|--|----------|---|---------------------------|--|---|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | | 深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1" | | NAME: Micro 5P B型 反向 两脚插无柱固定脚距 7.7 0.65短针 L=5.1平口 不锈钢外壳镀镍 (盐雾48H) | |
| APPD. | JM_Zheng | 23/05'02 | PJ. NO.: MC.01.22-21-1002 | | |
| CHKD. | LYX | 23/05'02 | SIZE: A4 DRW NO.: | | |
| PDWG.NO: | 0113-1 | DR. | SGF | 23/05'02 | FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1 |

| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|---------------|----------|
| A0 | | | 2023 20/04 | |

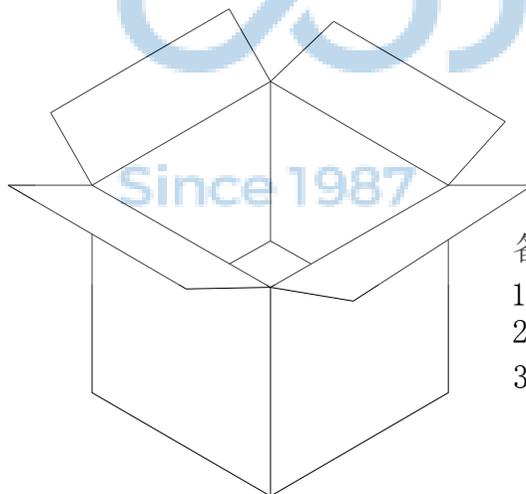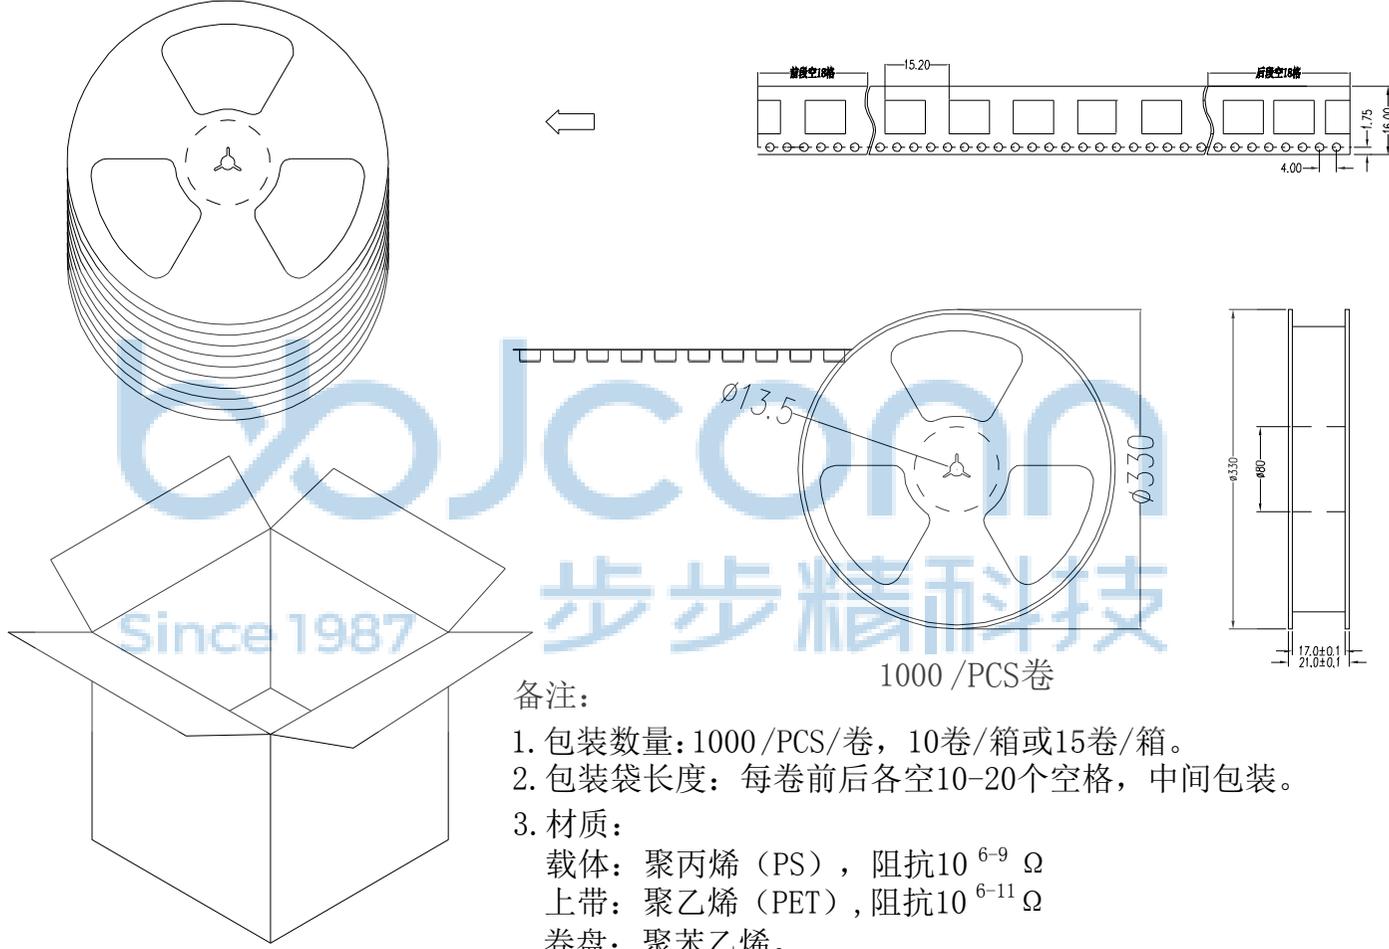

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



| | | | | |
|--|----------|--|---|---|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | | 深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3" .X*: ±2" .XX*: ±1" | | NAME: Micro 5P B型 反向 两脚插无柱固定脚距 7.7 0.65短针 L=5.1平口 不锈钢外壳电镀 (盐雾48H) |
| APPD. | JM_Zheng | 23/05'02 | PJ. NO.: MC. 01. 22-21-1002 SIZE: A4 DRW NO.: | |
| CHKD. | LYX | 23/05'02 | FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1 | |
| PDWG.NO: | 0113-1 | DR. | SGF 23/05'02 | |