
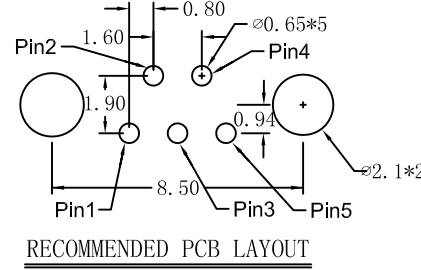


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

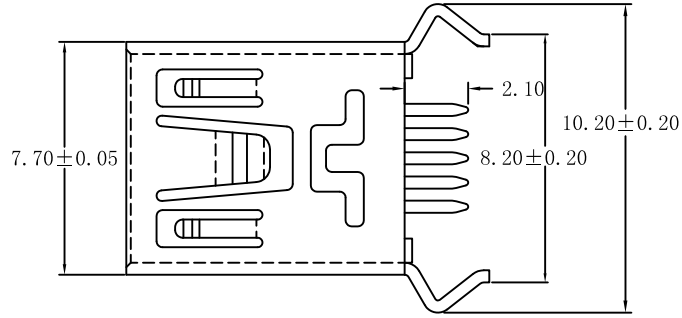

规格说明: Specifications:

电气特性: Electrical:




1. 额定电流: Current Rating  
1.0A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
300 V AC For one minuter
5. 绝缘阻抗: Insulation Resistance:  
100MEGA ohms MIN

原材料: Raw material:

1. 塑胶: Plastic cement:  
Hing Temperature Thermoplastics,  
LCP Black/Nature
2. 端子: Contact: Copper Alloy C5191/C2680
3. 外壳: Shell: Copper Alloy C2680




电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
2. 外壳: Shell:  
Nickel Plating

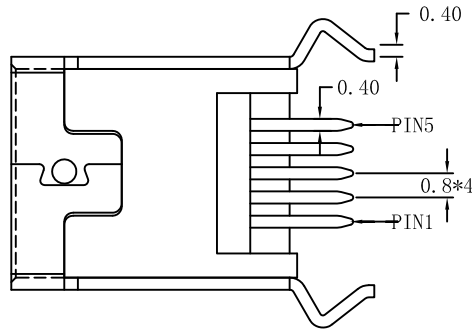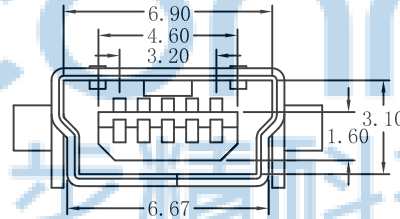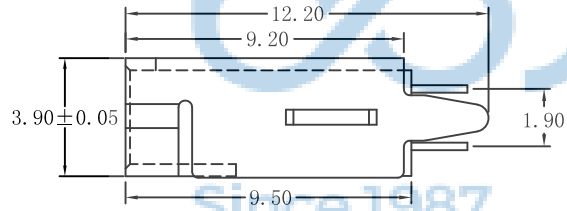

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b> NAME: MINI 5P B型 180度 H=9.20 弯脚 平口 LCP黑胶 铜壳 脚长2.1 APPD. JM_Zheng 23/05'02 PJ. NO.: UB.07.12-12-9001 CHKD. LYX 23/05'02 SIZE: A4 DRW NO.: PDWG.NO: 0064-2 DR. SGF 23/05'02 FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	
---	--	--	--

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

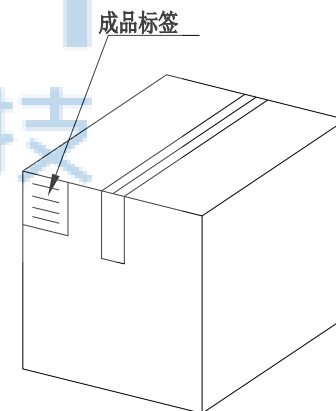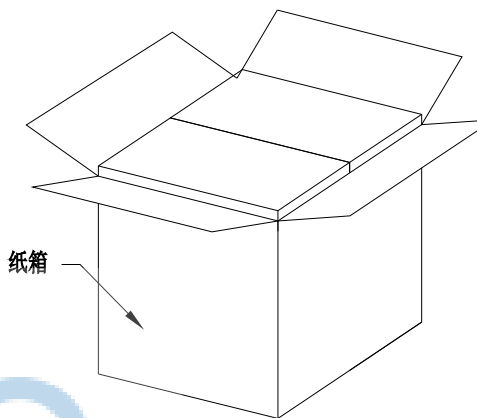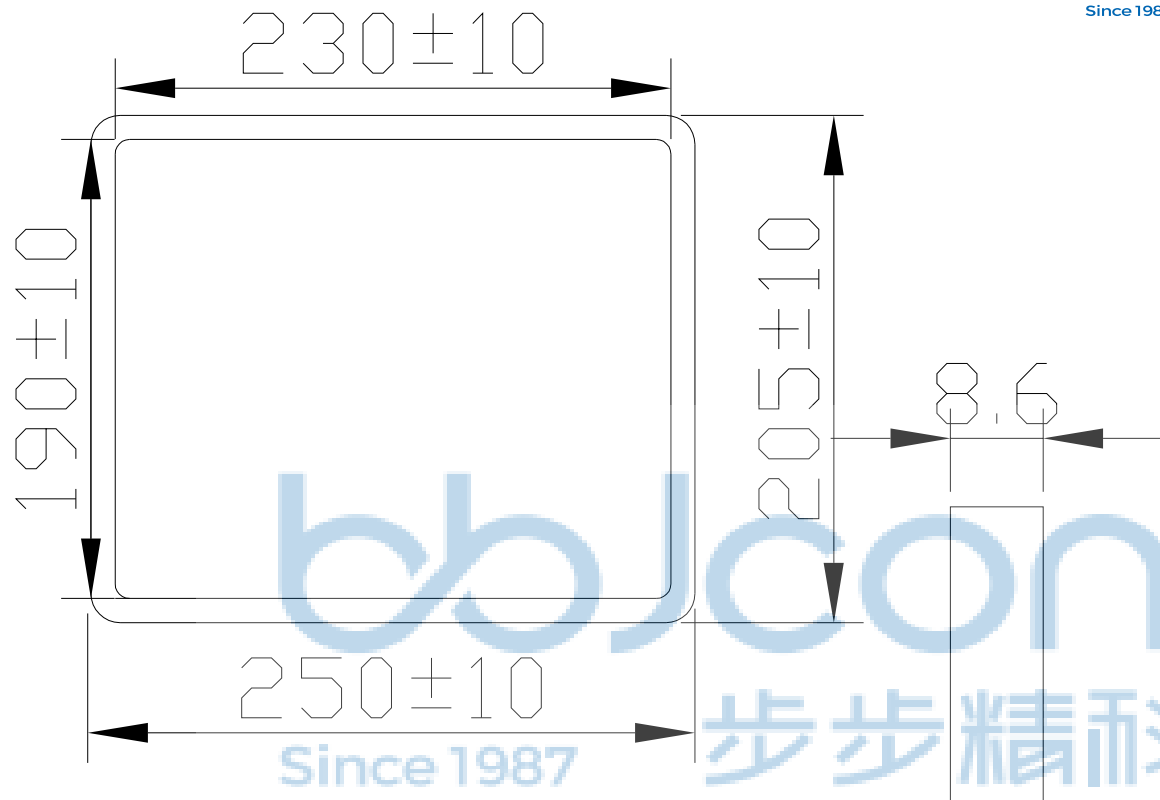

纸箱规格: 350\*210\*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100 pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .X': ±3" .XX: ±0.25    .X": ±2" .XXX: ±0.13    .XX': ±1"		NAME: MINI 5P B型 180度 H=9.20 弯脚 平口 LCP黑胶 铜壳 脚长2.1	
APPD.	JM_Zheng	23/05'02	PJ. NO.: UB.07.12-12-9001 SIZE: A4   DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES   MAT'L.: SEE NOTES		
PDWG.NO:	0064-2	DR.	SGF	23/05'02	SCALE: N/A   REV.: A3   UNIT: mm   PAGE: 1/1