
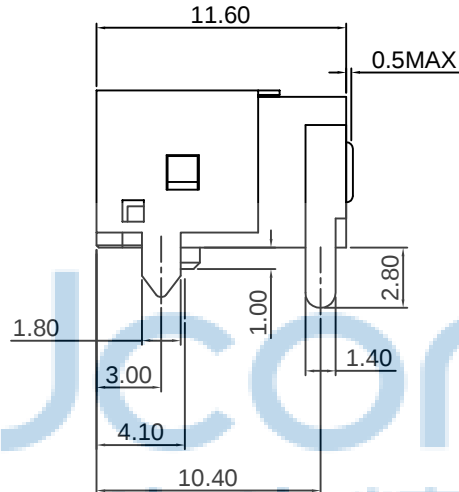
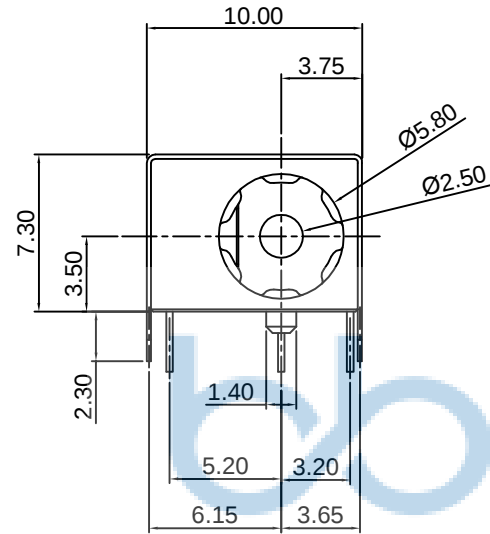



推荐插头尺寸

规格:

1. 额定值: DC30V 7A
2. 接触电阻: $\leq 30\text{m}\Omega$
3. 绝缘电阻: $\geq 100\text{M}\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}\text{C} \sim +80^{\circ}\text{C}$



电路示意图

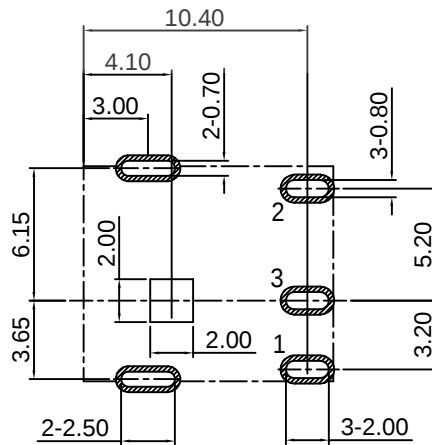



P.C.B 设计参考尺寸



7	面板	不锈钢 T=0.1mm	1	本色
6	上盖	磷铜 T=0.2mm	1	镀铜锡
5	主体	PA9T	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.4mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		NAME: DC-044A 2.5针 五脚插 全包 短柱 全铜 大电流7A	
APPD. JM_Zheng 23/05'02		PJ. NO.: DC.02.72-11-2010	
CHKD. LYX 23/05'02		SIZE: A4 DRW NO.:	
PDWG.NO: 0050-2		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF 23/05'02		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	

PE袋规格:***X*** (以实际出货为准)

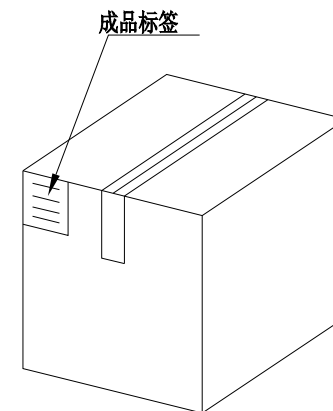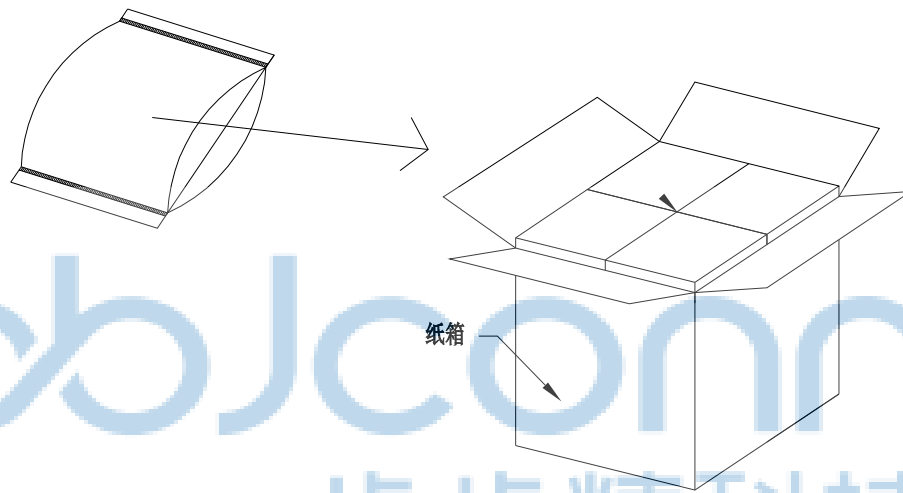

1. 包装要求:

- 1.1 每PE袋包装 500 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: DC-044A 2.5针 五脚插 全包 短柱 全铜 大电流7A			
APPD.	JM_Zheng	23/05'02	PJ. NO.: DC.02.72-11-2010		SIZE: A4 DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES		MAT'L.: SEE NOTES		
PDWG.NO:	0050-2	DR.	SGF	23/05'02	SCALE: N/A	REV.: A3	UNIT: mm PAGE: 1/1