
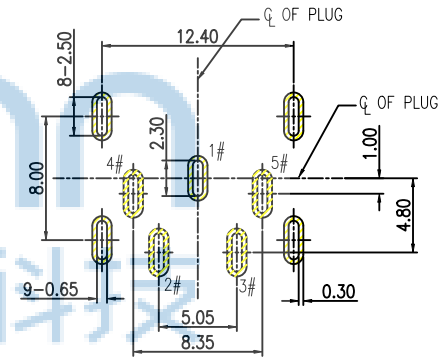
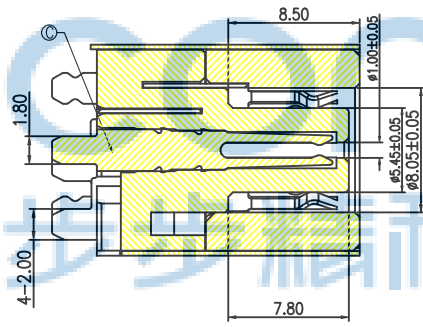
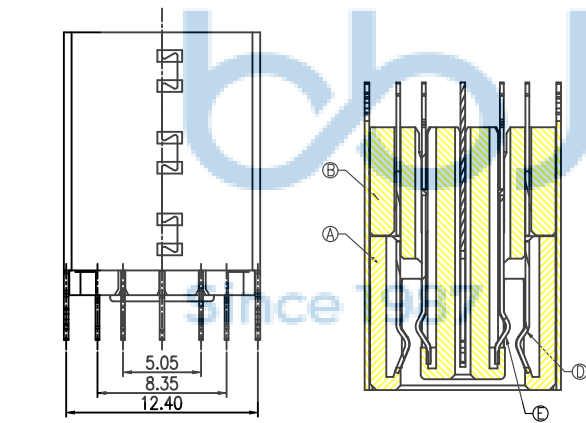




REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:

- RATING: DC 30V 25A
- CONTACT RESISTANCE:  
CENTER PIN: 30m $\Omega$  MAX(INITIAL).  
40m $\Omega$  MAX(FINAL).  
DC\_IN+/DC\_IN-: 15m $\Omega$  MAX(INITIAL).  
25m $\Omega$  MAX(FINAL).
- INSULATION RESISTANCE: 100 M $\Omega$  MIN.
- WITHSTAND VOLTAGE: 500 VAC
- INSERTION FORCE: 25N MAX.
- EXTRACTION FORCE: 6N MIN.
- DURABILITY: 5,000 CYCLES

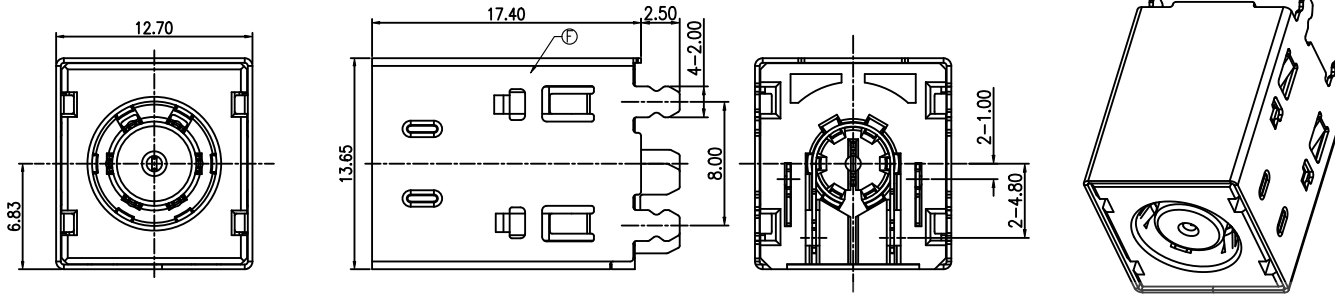

RECOMMENDED PCB LAYOUT  
TOP VIEW TOLERANCE:  $\pm 0.05$

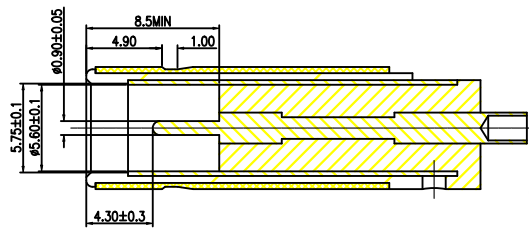

MATING PLUG



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
F	SHELL	SUS	Ni 50u"MIN.	1
E	ANODE	COPPER ALLOY	Ni 40u"	1
D	NEGATIVE	COPPER ALLOY	Ni 40u"	1
C	CENTER PIN	COPPER ALLOY	Au1u"(CONTACT AREA)/Sn80u"/Ni 40u"	1
B	COVER	HIGH TEMP.THERMOPLASTIC	BLACK	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0386-2

DR. SGF 23/05'02

深圳市步步精科技有限公司

DC座 DC-0.9针 全铜 直立式 九脚插 (DC790090-0945-20000E)

NAME: P.J. NO.: DC.02.K2-14-G001

SIZE: A4 DRW NO.:


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	





DC JACK

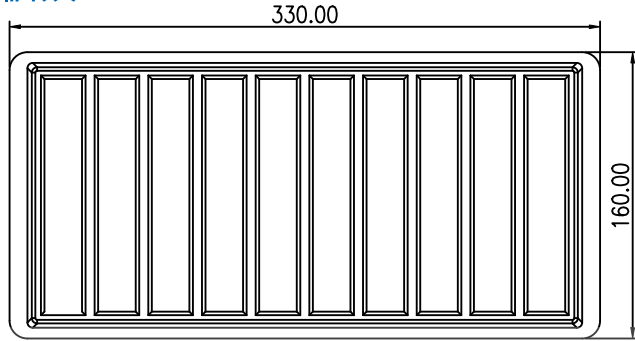

100PCS/盘

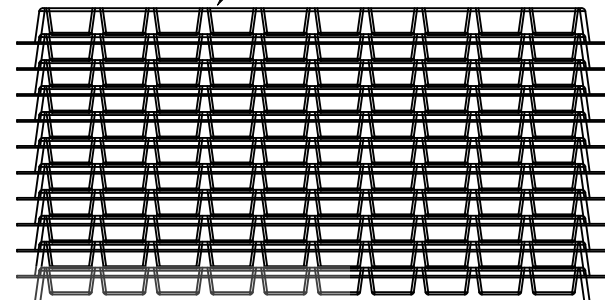

1000PCS/10盘/捆

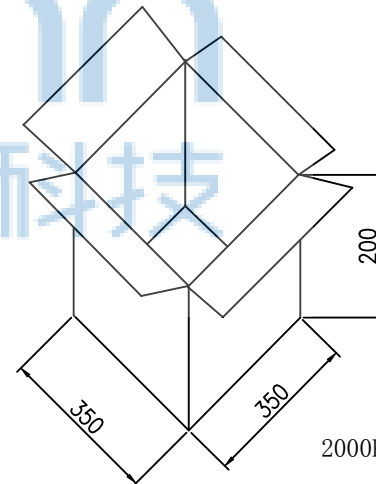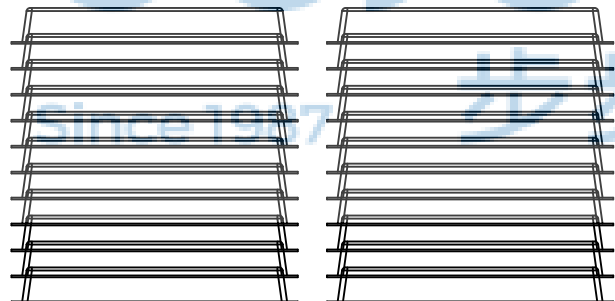

2000PCS/20盘/2捆/箱



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b> .X: ±0.38 X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X'': ±1"		NAME: DC座 DC-0.9针 全铜 直立 九脚插 (DC790090-0945-20000H)	
APPD.	JM_Zheng	23/05/02	PJ. NO.: DC.02.K2-14-G001		
CHKD.	LYX	23/05/02	SIZE: A4 DRW NO.:		
PDWG.NO:	0386-2	DR.	SGF	23/05/02	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1