

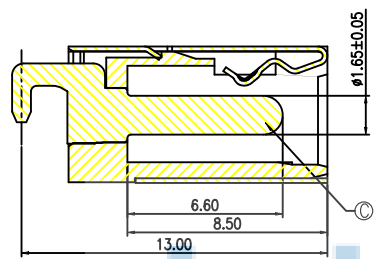
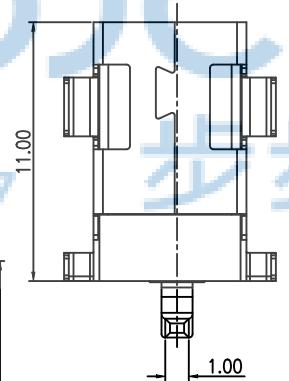



REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	



- SPECIFICATION:
1. RATING: DC 20V 5A
 2. CONTACT RESISTANCE: 30m Ω MAX.
 3. INSULATION RESISTANCE: 100 M Ω MIN.
 4. WITHSTAND VOLTAGE: 500 VAC
 5. INSERTION FORCE: 30N MAX.
 6. EXTRACTION FORCE: 3N MIN.
 7. DURABILITY: 5,000 CYCLES

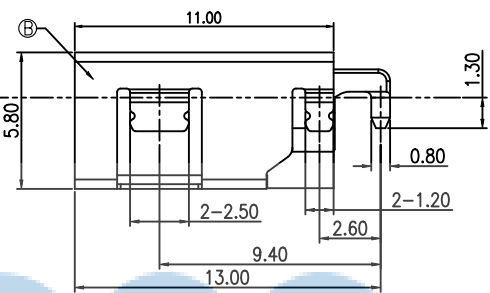

SECTION A-A

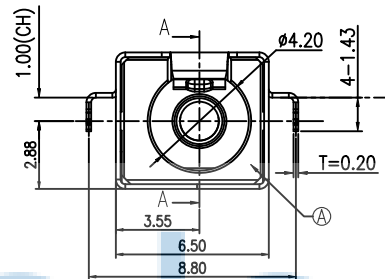

MATING PLUG

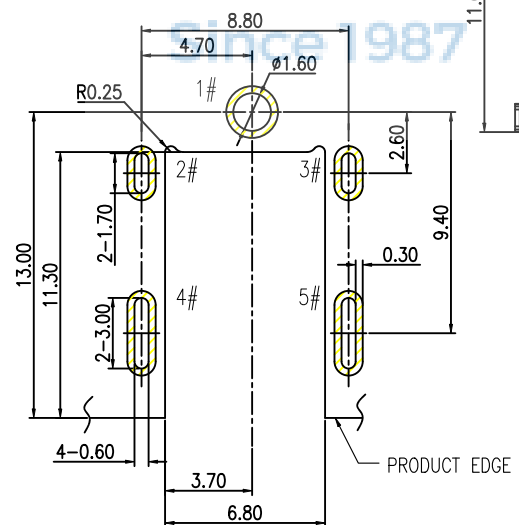

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05



C	CENTER PIN	Zn ALLOY	GOLD FLASH/Ni 50u"	1
B	SHELL	COPPER ALLOY	Ni 50u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0386-2

深圳市步步精科技有限公司

NAME: DC座 DC-1.65针 全铜 沉板式 四脚插(DC400170-0690-30000H 模型)

APPD. JM_Zheng 23/05/02

CHKD. LYX 23/05/02




DR. SGF 23/05/02

PJ. NO.: DC.03.52-12-G002

SIZE: A4 DRW NO.:


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

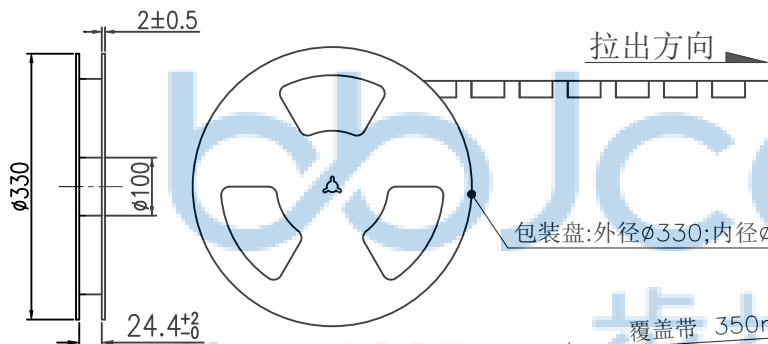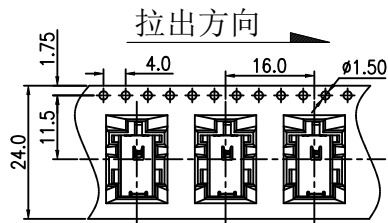



包装盘: 外径 ϕ 330; 内径 ϕ 100

覆盖带 350mm 最少.

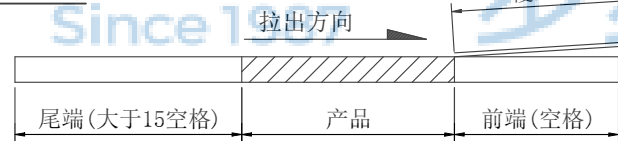

总共10层

PE袋:

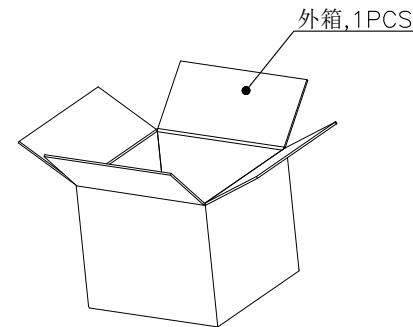

备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=300
- 包装数量: 600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 X': $\pm 3'$.XX: ± 0.25 X'': $\pm 2'$.XXX: ± 0.13 .XX': $\pm 1'$		NAME: DC座 DC-1.65针 全铜 沉板式 四脚插(DC400170-0690-30000H 模型) P.J. NO.: DC_03.52-12-G002 SIZE: A4 DRW NO.:	
APPD.	JM_Zheng 23/05'02			FINISH: SEE NOTES MAT'L: SEE NOTES	
CHKD.	LYX 23/05'02	SCALE: N/A		REV.: A3 UNIT: mm PAGE: 1/1	
PDWG.NO:	0386-2	DR.	SGF 23/05'02		