


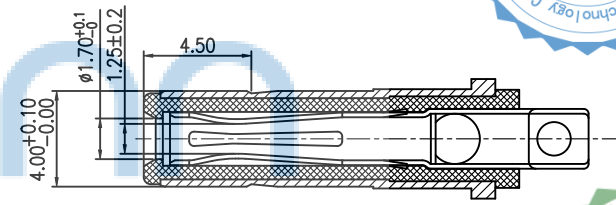
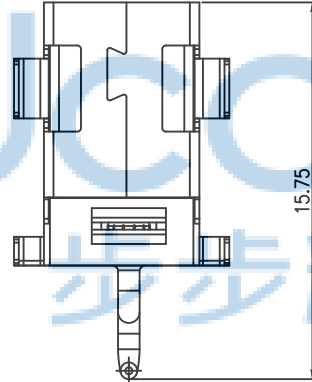
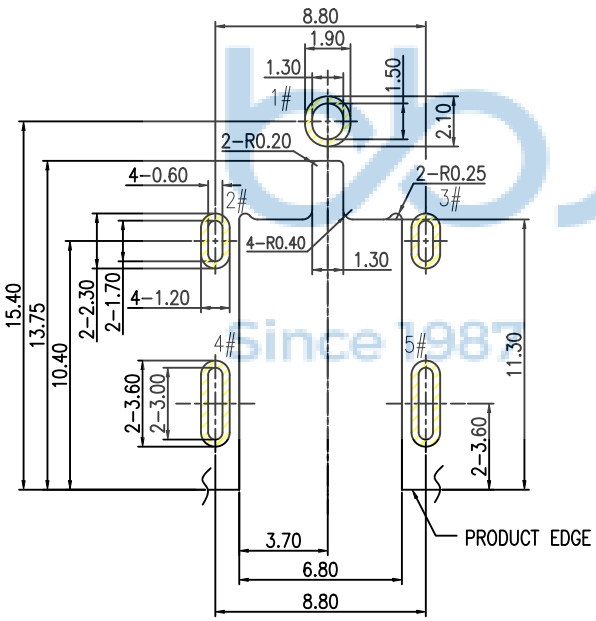
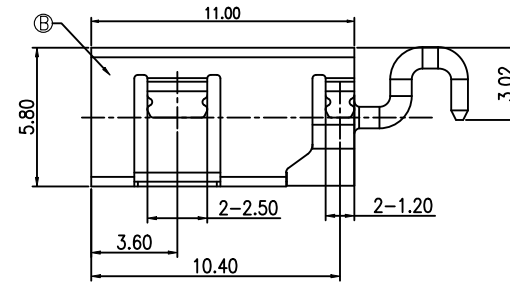
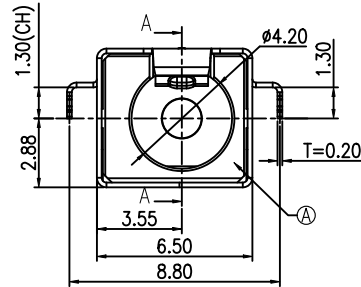


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30m Ω MAX.
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

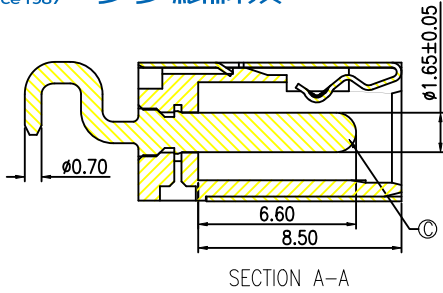

C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0386-2

DR. SGF 23/05'02

APPD. JM_Zheng 23/05'02

CHKD. LYX 23/05'02

深圳市步步精科技有限公司

RoHS Green Product Compliant

NAME: 底座 DC-1.65英寸 全铜 沉板式 四脚插 (DC400170-1089-20000H)

PJ. NO.: DC.03.52-12-G006

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

A

B

C

D

E






A

B

C

D

E

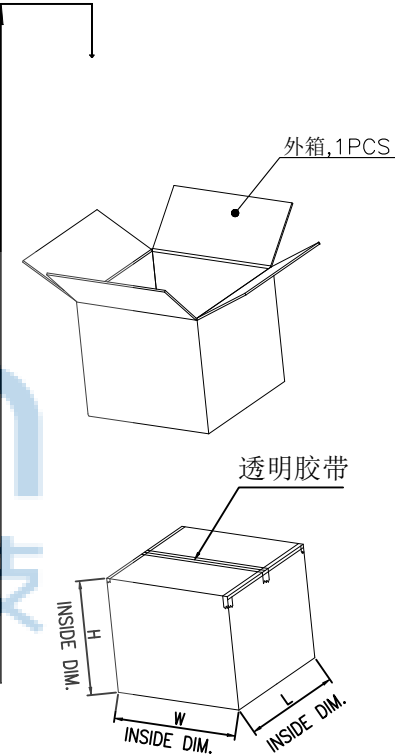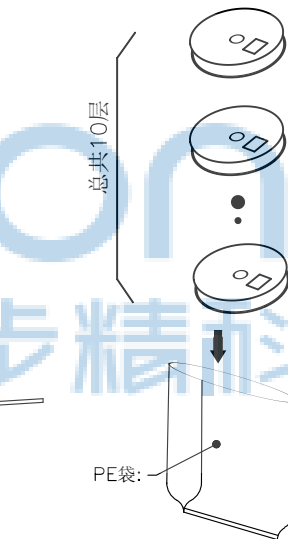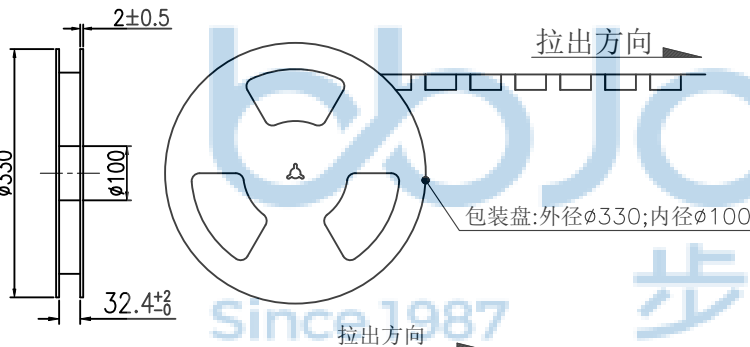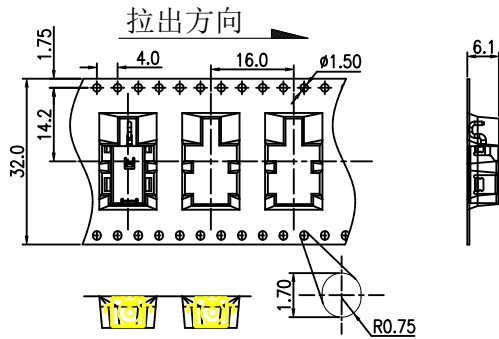

- 备注:
- 材料规格:
 - 1.1 载带:T=0.50mm,黑色
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=380
 - 包装数量:
600PCS/卷, 10卷(6000PCS)/箱
 - 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng 23/05'02	NAME: DC座 DC-1.65针 全铜 沉板式 四脚插 (DC400170-1089-20000H)	
CHKD.	LYX 23/05'02	P.J. NO.: DC_03.52-12-G006	
PDWG.NO:	0386-2	SIZE: A4 DRW NO.:	
DR.	SGF 23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	