




| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|---------------|----------|
| A0 | | | 2023 20/04 | |



- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 29.4N MAX.;
- CONNECTOR UNMATING FORCES: 2.94N MIN.;

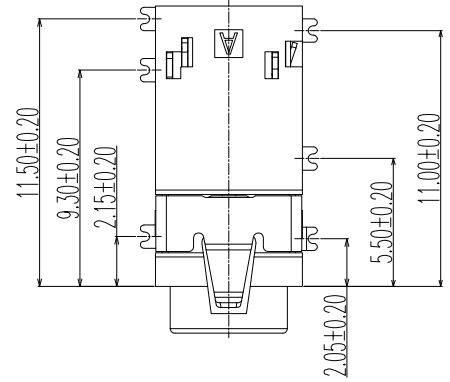



3D VIEW

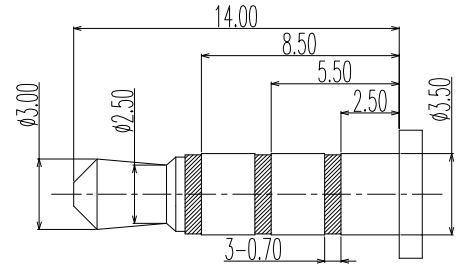




(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

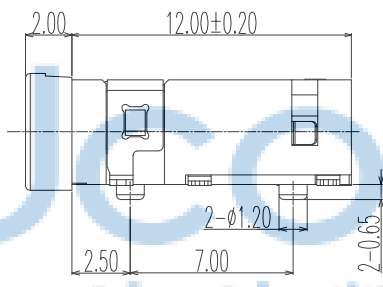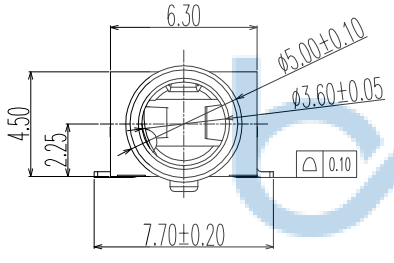

MYLAR 6.00X3.80X0.06

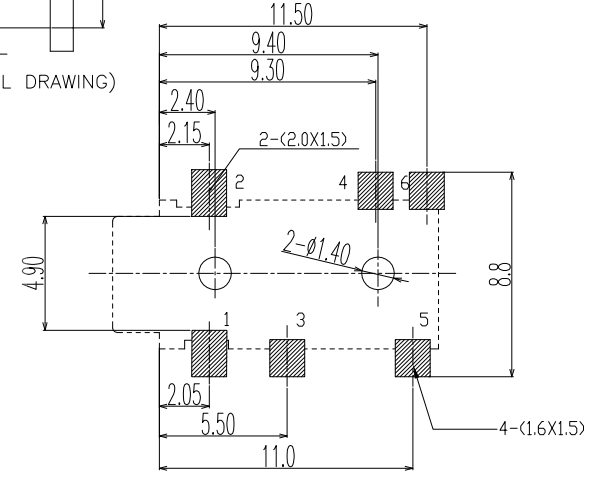

P.C.B LAYOUT
TOP VIEW

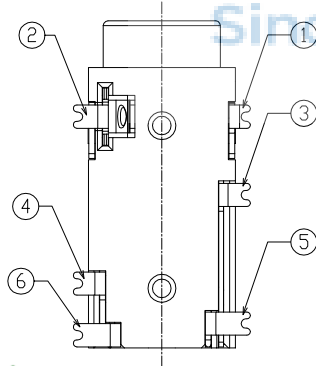

| ITEM | NAME | Q'TY | DESCRIPTION | NOTE |
|------|-------------|------|--|------|
| 7 | TERMINAL 6# | 1 | BRASS; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA | |
| 6 | TERMINAL 5# | 1 | BRASS; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA | |
| 5 | TERMINAL 4# | 1 | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA | |
| 4 | TERMINAL 3# | 1 | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA | |
| 3 | TERMINAL 2# | 1 | PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA | |
| 2 | TERMINAL 1# | 1 | PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING. | |
| 1 | HOUSING | 1 | HIGHT TEMPERATURE PLASTIC COLOR BLACK | |





THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0076-1

APPD. JM_Zheng 23/05/02
CHKD. LYX 23/05/02
DR. SGF 23/05/02

深圳市步步精科技有限公司
APPROVED
工程部

NAME: 3.5耳机座 有头 六脚贴 带柱 四节 (PJ35A051-F06G1ER-A)
PJ. NO.: PJ.01.22-01-3020
SIZE: A4 | DRW NO.:
FINISH: SEE NOTES | MAT'L.: SEE NOTES
SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/1

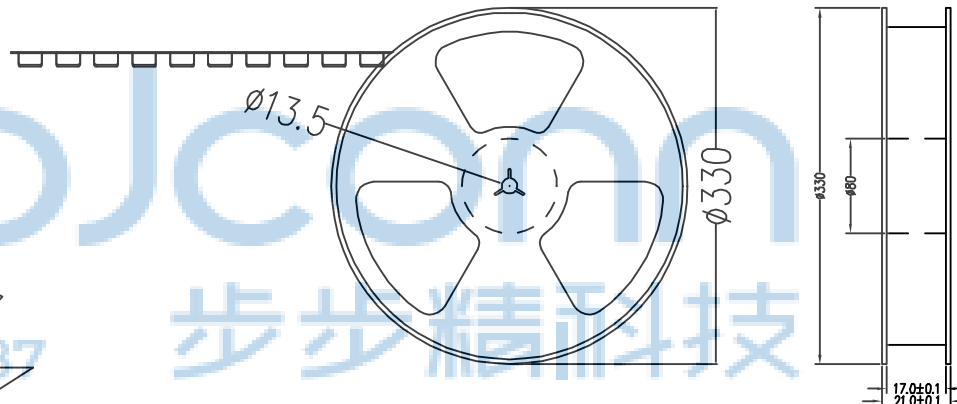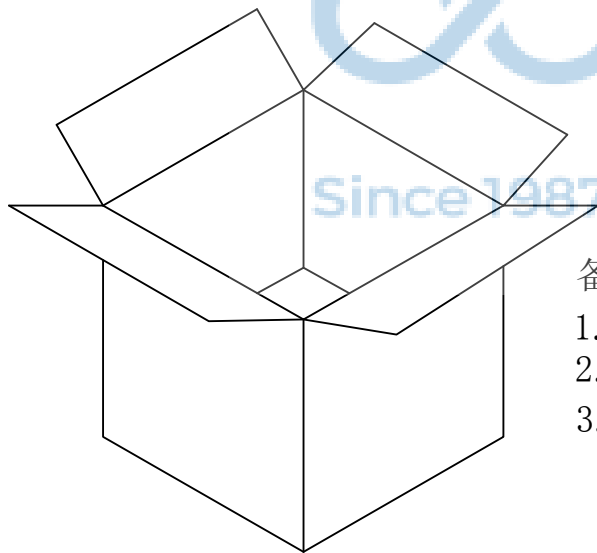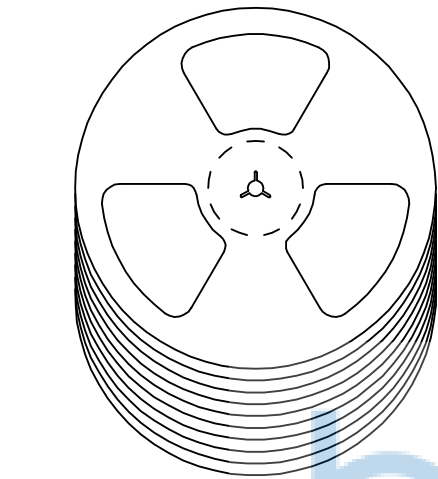

备注:

1. 包装数量: 1000/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

| | | | | | |
|--|----------|--|---------------------------|---|---|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | | 深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX': ±1" | | NAME: 3.5耳机座 有头 六脚贴 带柱 四节 (PJ35A051-F06G1ER-A) | |
| APPD. | JM_Zheng | 23/05'02 | PJ. NO.: PJ.01.22-01-3020 | | |
| CHKD. | LYX | 23/05'02 | SIZE: A4 DRW NO.: | | |
| PDWG.NO: | 0076-1 | DR. | SGF | 23/05'02 | FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1 |