




| REV. | ECN NO. | CONTENT | DATE          | ENGINEER |
|------|---------|---------|---------------|----------|
| AO   |         |         | 2023<br>20/04 |          |





- SPECIFICATION:
- CURRENT RATING:DC 0.5A MAX.
  - VOLTAGE RATING:DC 12V.
  - CONTACT RESISTANCE:50mΩ MAX.
  - INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.
  - WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE.
  - LIFE TEST:5000 CYCLES MIN,
  - MATING FORCE:3~30N,  
UNMATING FORCE:3~30N.
  - TEPROOF LEVEL:IPX7

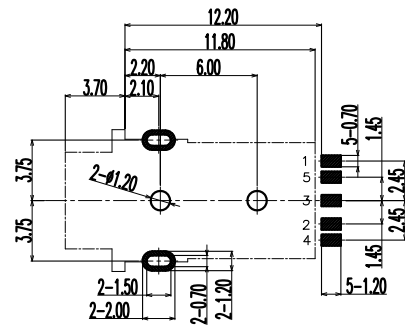


3D VIEW







RECOMMENDED P.C.B LAYOUT  
TOP VIEW

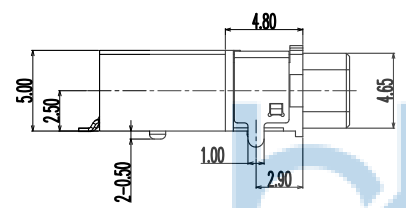

PLUG MATE DRAWING



面板开孔参考尺寸

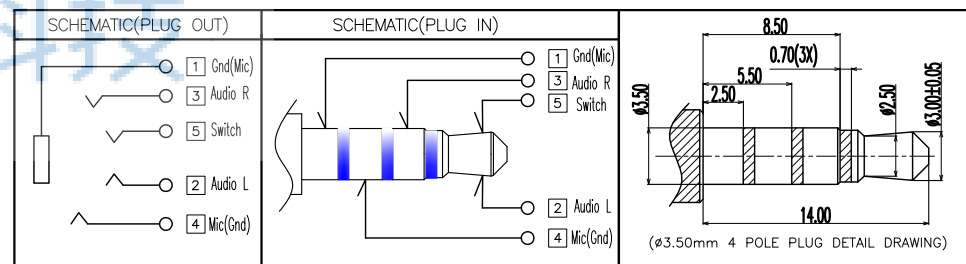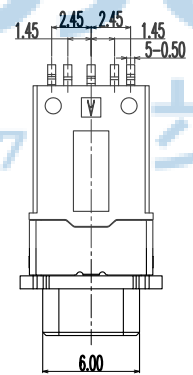


| ITEM | NAME        | Q'TY | DESCRIPTION   | NOTE |
|------|-------------|------|---|------|
| 8    | COVER       | 1    | HIGH TEMPERATURE PLASTIC COLOR BLACK  |      |
| 7    | HOUSING     | 1    | HIGH TEMPERATURE PLASTIC COLOR BLACK  |      |
| 6    | SHELL       | 1    | PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING  |      |
| 5    | TERMINAL 5# | 1    |   |      |
| 4    | TERMINAL 4# | 1    | PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER TAIL AREA, ALL OVER NICKEL PLATED |      |
| 3    | TERMINAL 3# | 1    |   |      |
| 2    | TERMINAL 2# | 1    | PHOSPHOR BRONZE; GOLD FLASH ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER TAIL AREA, ALL OVER NICKEL PLATED |      |
| 1    | TERMINAL 1# | 1    |   |      |



|  |  |                         |  |  |  |
|--|--|-------------------------|--|--|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.                        |  | .X: ±0.38 X': ±3'       |  | NAME:  |  |
| CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  | .XX: ±0.25 .X': ±2'     |  | 3.5耳机座 方头 五脚贴片+两脚插 带柱 三节 防水IPX7 (PJ35A099-F06J1BR-A) |  |
| PDWG.NO: 0076-1  |  | APPD. JM_Zheng 23/05/02 |  | PJ. NO.: PJ.04.22-01-3003                            |  |
| DR. SGF 23/05/02   |  | CHKD. LYX 23/05/02      |  | SIZE: A4 DRW NO.:                                    |  |
|  |  |                         |  | FINISH: SEE NOTES MAT'L.: SEE NOTES                  |  |
|  |  |                         |  | SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1               |  |

**深圳市步步精科技有限公司**

| REV. | ECN NO | CONTENT | DATE          | ENGINEER |
|------|--------|---------|---------------|----------|
| A0   |        |         | 2023<br>20/04 |          |

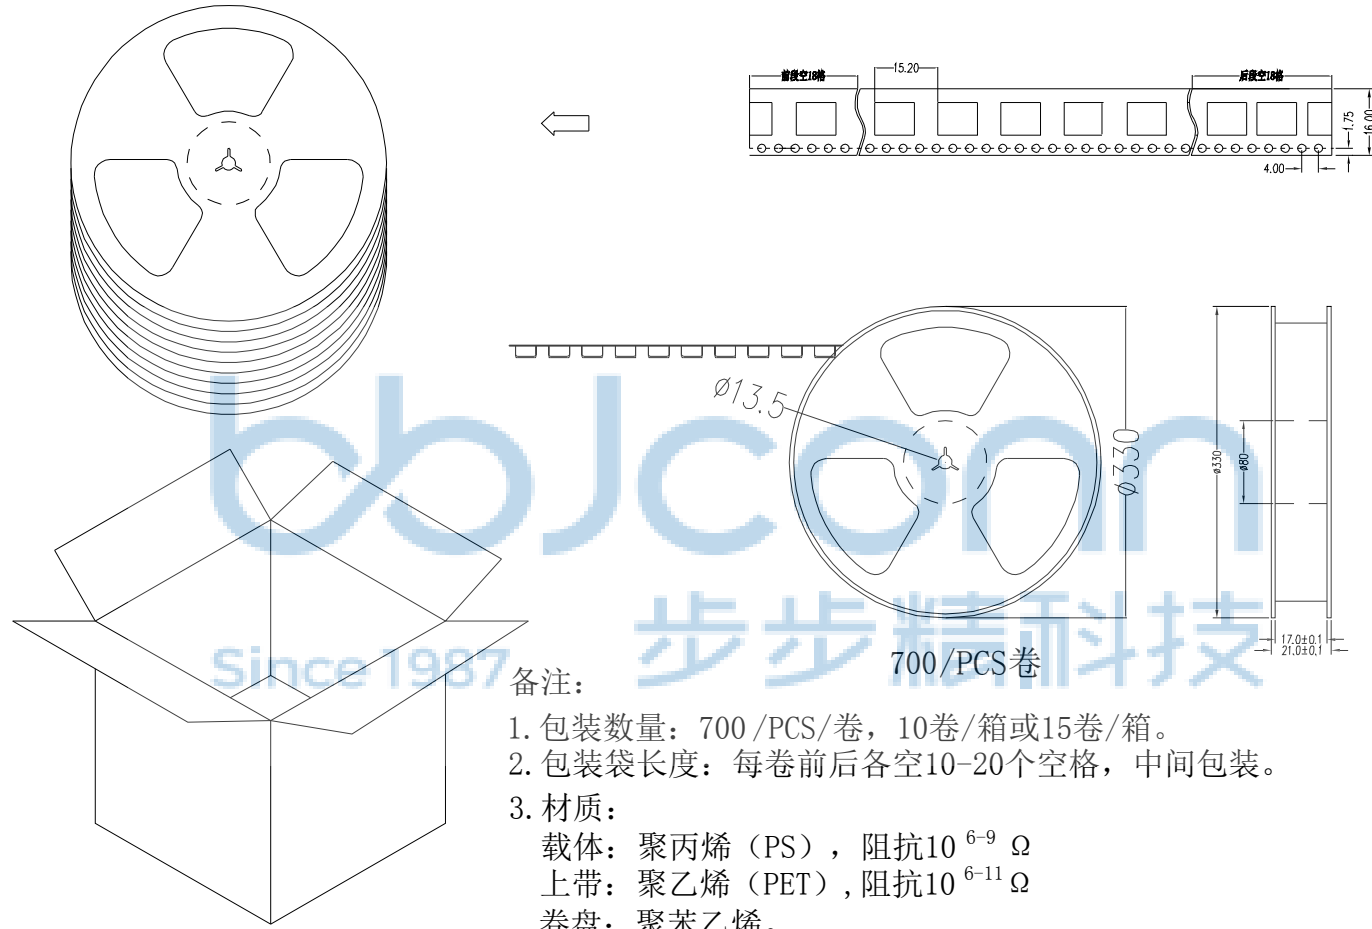

- 备注:
1. 包装数量: 700 /PCS/卷, 10卷/箱或15卷/箱。
  2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
  3. 材质:
    - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
    - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
    - 卷盘: 聚苯乙烯。
- 纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM



|  |          |  |  |
|--|----------|--|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司                                 |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13   |          | X': ±3"<br>.X": ±2"<br>.XX": ±1"             |  |
| APPD.  | JM_Zheng | 23/05'02                                     | NAME: 3.5耳机座 方头 五脚贴片+两脚插 带柱 三节 防水1PX7 (PJ35A099-F06J1BR-A) |
| CHKD.  | LYX      | 23/05'02                                     | PJ. NO.: PJ.04.22-01-3003                                  |
| DR.  | SGF      | 23/05'02                                     | SIZE: A4   DRW NO.:  |
| PDWG.NO: 0076-1  |          | FINISH: SEE NOTES   MAT'L.: SEE NOTES        |  |
|  |          | SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 1/1 |  |