

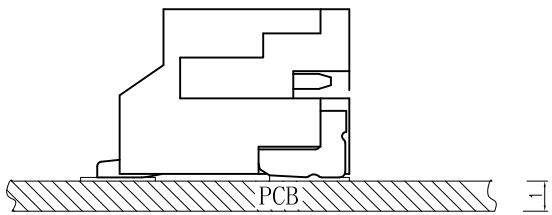
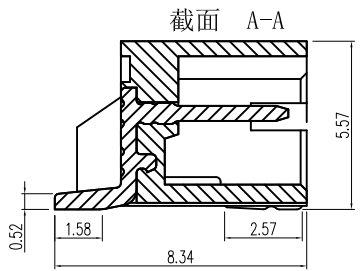





REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

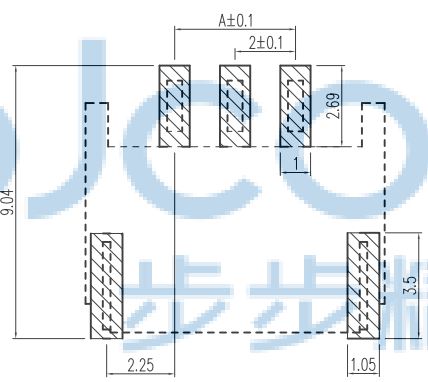

1. 技术参数:
- 1.1 额定电流: 2.0A AC/DC
 - 1.2 额定电压: 250V
 - 1.3 耐电压: 1000V ACminute
 - 1.4 接触电阻: 20mΩ MAX
 - 1.5 绝缘电阻: 1000MΩ MIN
 2. 工作温度: -25℃~+85℃

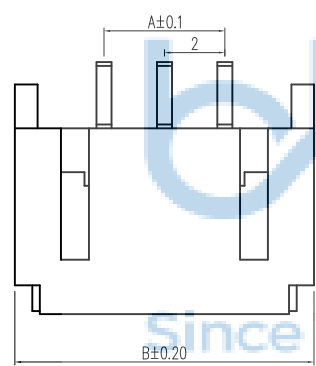

印制线路板

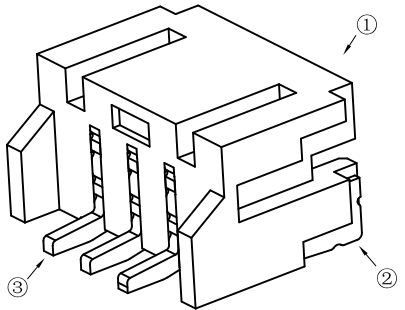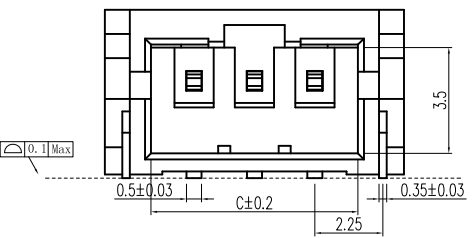

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2. OWT-2P	2.0	7.90	4.85	2. OWT-12P	22.0	27.9	24.85
2. OWT-3P	4.0	9.90	6.85	2. OWT-13P	24.0	29.9	26.85
2. OWT-4P	6.0	11.90	8.85	2. OWT-14P	26.0	31.9	28.85
2. OWT-5P	8.0	13.90	10.85	2. OWT-15P	28.0	33.9	30.85
2. OWT-6P	10.0	15.90	12.85	2. OWT-16P	30.0	35.9	32.85
2. OWT-7P	12.0	17.90	14.85				
2. OWT-8P	14.0	19.90	16.85				
2. OWT-9P	16.0	21.90	18.85				
2. OWT-10P	18.0	23.90	20.85				
2. OWT-11P	20.0	25.90	22.85				

NO	物料名称	规格型号	数量 (PCS)	材质	镀涂
①	底座	2.0	1	LCPE130i	本色
②	焊片	2.0	2	黄铜	锡
③	插针	2.0	2~20	黄铜	锡

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0013-1

深圳市步步精科技有限公司

NAME: 针座 2.0-9P 卧贴 米黄色

APPD. JM_Zheng

CHKD. LYX

DR. SGF


PJ. NO.: WT.01.61-74-H002

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

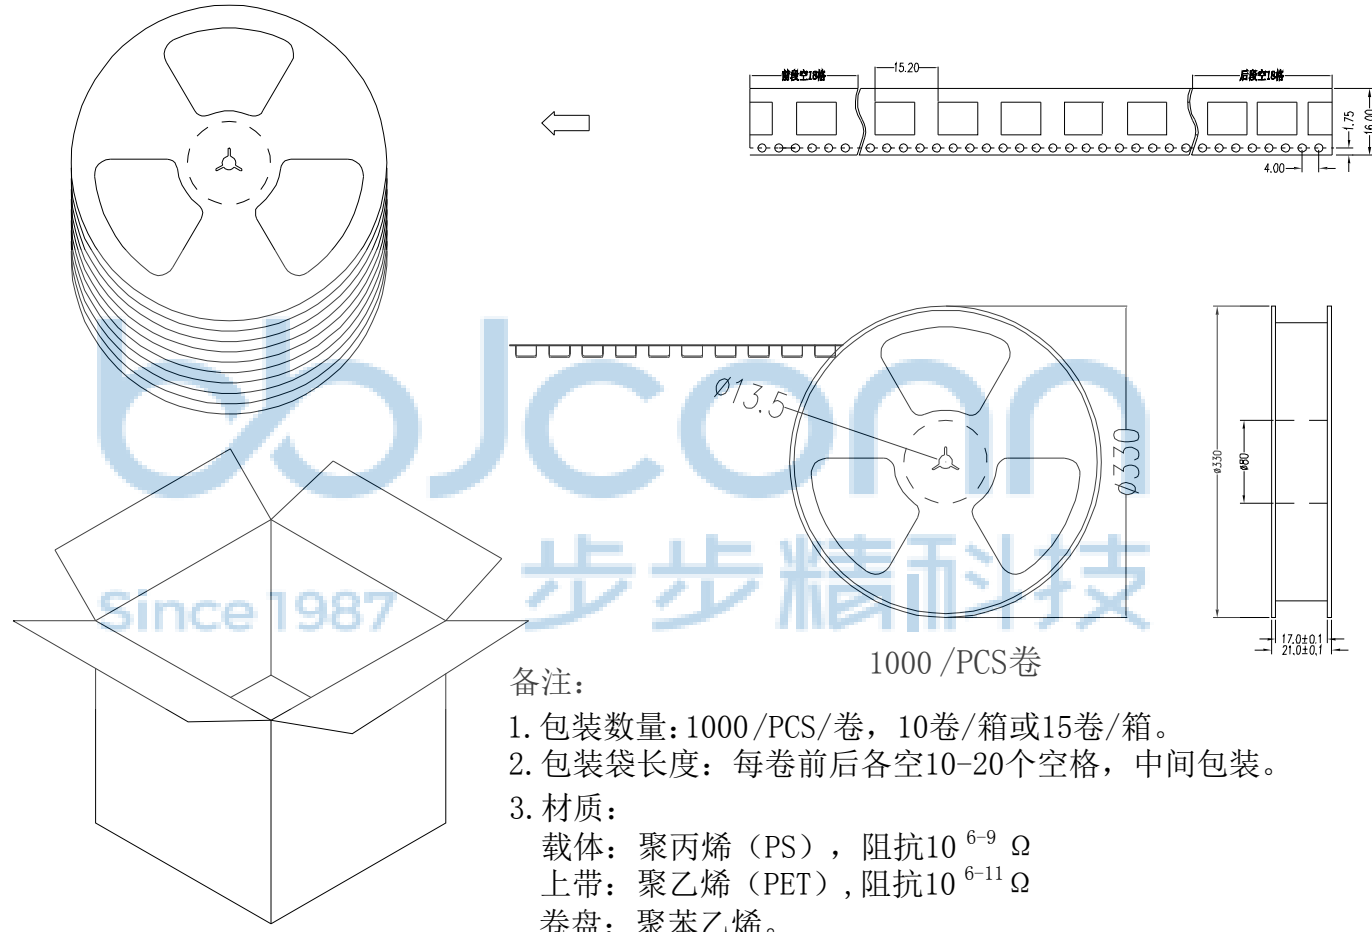

备注：
 1. 包装数量：1000 / PCS / 卷，10卷 / 箱或15卷 / 箱。
 2. 包装袋长度：每卷前后各空10-20个空格，中间包装。
 3. 材质：
 载体：聚丙烯（PS），阻抗 $10^{6-9} \Omega$
 上带：聚乙烯（PET），阻抗 $10^{6-11} \Omega$
 卷盘：聚苯乙烯。

纸箱规格：345*345*23MM
 纸箱规格：345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 针座 2.0-9P 卧贴 米黄色	
APPD. JM_Zheng	CHKD. LYX	DR. SGF	PJ. NO.: WT.01.61-74-H002 SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0013-1		SCALE: N/A		REV.: A0	UNIT: mm PAGE: 2/2