




印制线路板

1. 技术参数:



- 1.1 额定电流: 1.0A AC/DC
- 1.2 额定电压: 50V
- 1.3 耐电压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 500MΩ MIN
- 2. 工作温度: -25℃~+85℃

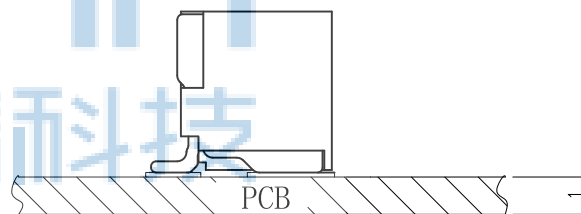

截面 A-A

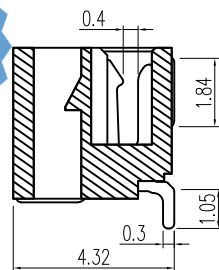

| Circuits  | Dimensions (mm) |       |       | Circuits  | Dimensions (mm) |       |       |
|-----------|-----------------|-------|-------|-----------|-----------------|-------|-------|
|           | A               | B     | C     |           | A               | B     | C     |
| GH WT-2P  | 1.25            | 3.85  | 5.80  | GH WT-12P | 13.75           | 16.35 | 18.30 |
| GH WT-3P  | 2.50            | 5.10  | 7.05  | GH WT-13P | 15.00           | 17.60 | 19.55 |
| GH WT-4P  | 3.75            | 6.35  | 8.30  | GH WT-14P | 16.25           | 18.85 | 20.80 |
| GH WT-5P  | 5.00            | 7.60  | 9.55  | GH WT-15P | 17.50           | 20.10 | 22.05 |
| GH WT-6P  | 6.25            | 8.85  | 10.80 | GH WT-16P | 18.75           | 21.35 | 23.30 |
| GH WT-7P  | 7.50            | 10.10 | 12.05 |           |                 |       |       |
| GH WT-8P  | 8.75            | 11.35 | 13.30 |           |                 |       |       |
| GH WT-9P  | 10.00           | 12.60 | 14.55 |           |                 |       |       |
| GH WT-10P | 11.25           | 13.85 | 15.80 |           |                 |       |       |
| GH WT-11P | 12.50           | 15.10 | 17.05 |           |                 |       |       |

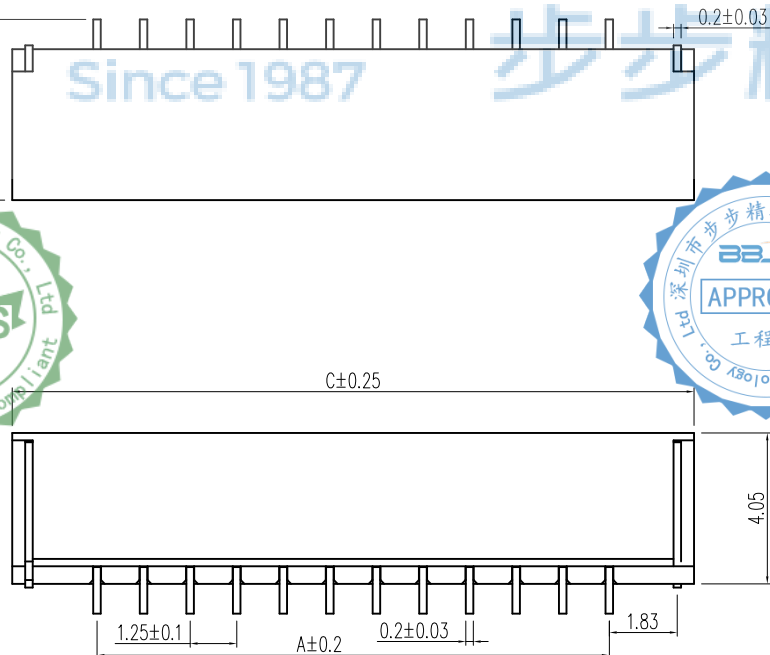


| NO | 物料名称 | 规格型号 | 数量(PCS) | 材质       | 镀涂 |
|----|------|------|---------|----------|----|
| ①  | 基座   | GH   | 1       | LCPE130i | 本色 |
| ②  | 焊片   | GH   | 2       | 磷铜       | 锡  |
| ③  | 插针   | GH   | 2~20    | 磷铜       | 锡  |

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

**深圳市步步精科技有限公司**

NAME: 针座 1.25-3P 卧贴 带扣 米黄色  
 APPD. JM\_Zheng  
 CHKD. LYX  
 PDWG.NO: 0013-1  
 DR. SGF  
 PJ. NO.: WT.04.63-73-H013  
 SIZE: A4 DRW NO.:  
 FINISH: SEE NOTES MAT'L.: SEE NOTES  
 SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0   |        |         |      |          |

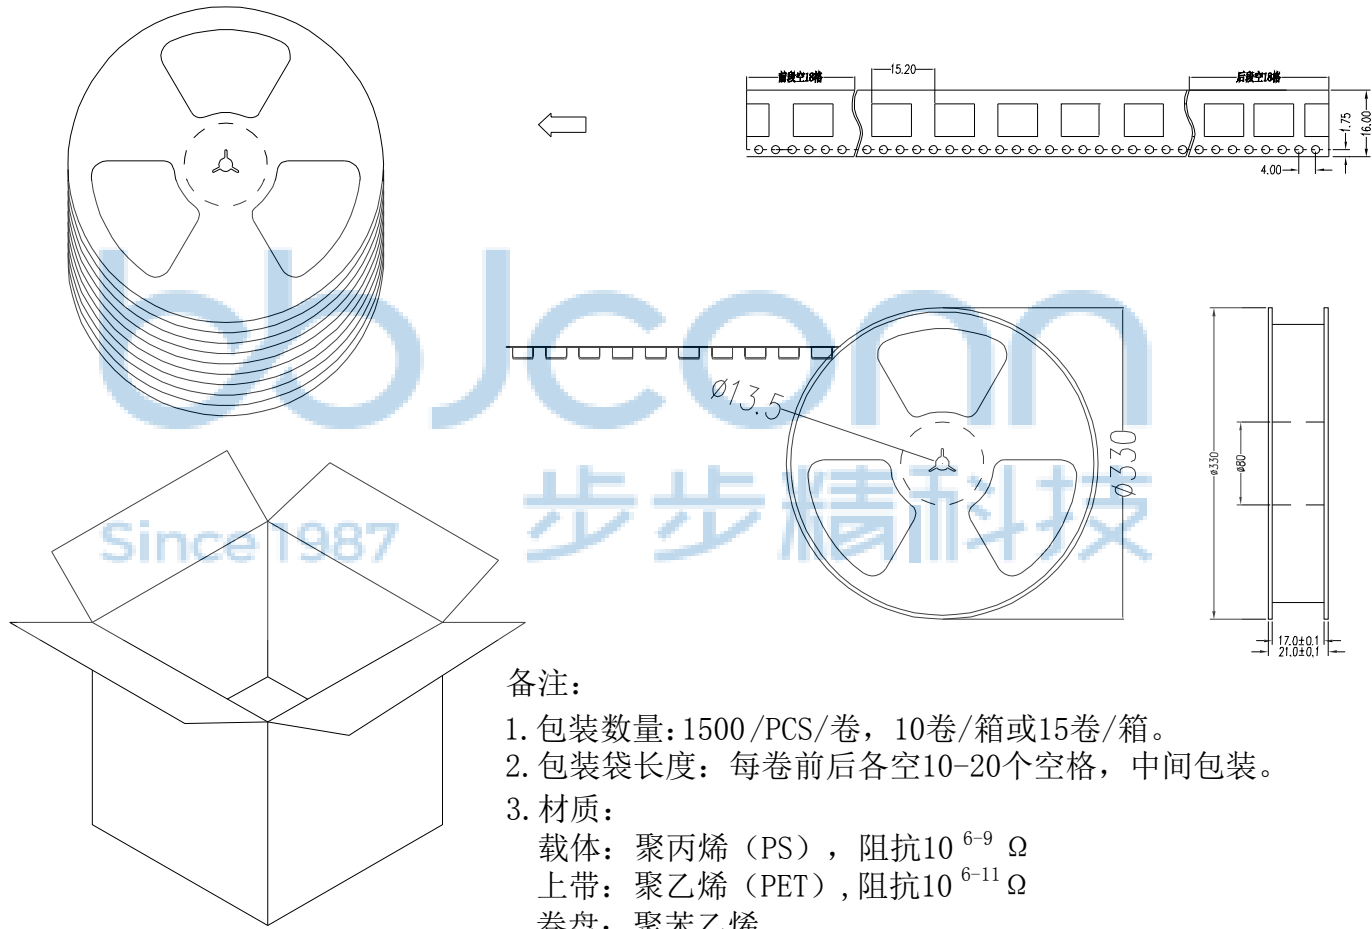

备注:

1. 包装数量: 1500 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM

|  |          |   |     |  |          |
|--|----------|---|-----|--|----------|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |          | 深圳市步步精科技有限公司<br>.X: ±0.38    .X': ±3"<br>.XX: ±0.25    .X': ±2"<br>.XXX: ±0.13    .XX': ±1" |     | NAME: 针座 1.25-3P 卧贴 带扣 米黄色             |          |
| APPD.  | JM_Zheng | PJ. NO.: WT.04.63-73-H013<br>SIZE: A4   DRW NO.:  |     | FINISH: SEE NOTES    MAT'L.: SEE NOTES |          |
| CHKD.  | LYX      | SCALE: N/A  |     | REV.: A0                               | UNIT: mm |
| PDWG.NO:   | 0013-1   | DR.   | SGF | PAGE:                                  | 2/2      |