

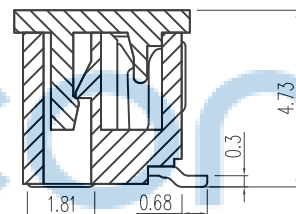


1. 技术参数:


- 1.1 额定电流: 1.0A AC/DC
- 1.2 额定电压: 50V
- 1.3 耐电压: 500V ACminute
- 1.4 接触电阻: 20mΩ MAX
- 1.5 绝缘电阻: 500MΩ MIN
- 2. 工作温度: -25℃~+85℃

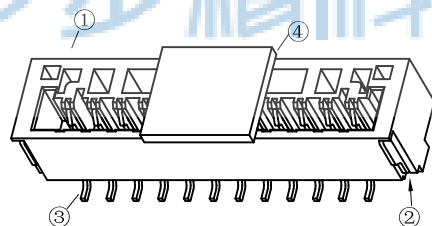

截面 A-A

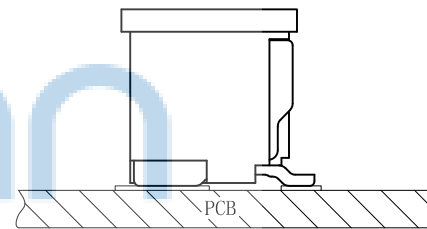

| Circuits | Dimensions (mm) | | | Circuits | Dimensions (mm) | | |
|-----------|-----------------|-------|-------|-----------|-----------------|-------|-------|
| | A | B | C | | A | B | C |
| GH LT-2P | 1.25 | 3.85 | 5.80 | GH LT-12P | 13.75 | 16.35 | 18.30 |
| GH LT-3P | 2.50 | 5.10 | 7.05 | GH LT-13P | 15.00 | 17.60 | 19.55 |
| GH LT-4P | 3.75 | 6.35 | 8.30 | GH LT-14P | 16.25 | 18.85 | 20.80 |
| GH LT-5P | 5.00 | 7.60 | 9.55 | GH LT-15P | 17.50 | 20.10 | 22.05 |
| GH LT-6P | 6.25 | 8.85 | 10.80 | GH LT-16P | 18.75 | 21.35 | 23.30 |
| GH LT-7P | 7.50 | 10.10 | 12.05 | | | | |
| GH LT-8P | 8.75 | 11.35 | 13.30 | | | | |
| GH LT-9P | 10.00 | 12.60 | 14.55 | | | | |
| GH LT-10P | 11.25 | 13.85 | 15.80 | | | | |
| GH LT-11P | 12.50 | 15.10 | 17.05 | | | | |

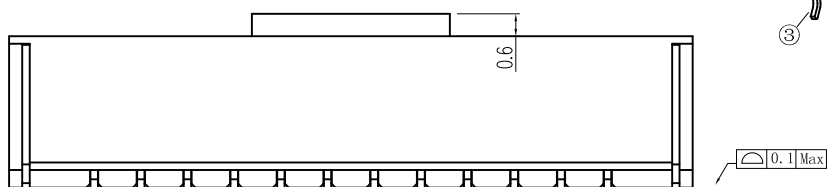

| NO | 物料名称 | 规格型号 | 数量 (PCS) | 材质 | 镀涂 |
|----|------|------|----------|----------|----|
| ① | 基座 | GH | 1 | LCPE130i | 本色 |
| ② | 焊片 | GH | 2 | 磷铜 | 锡 |
| ③ | 插针 | GH | 2~20 | 磷铜 | 锡 |
| ④ | 盖板 | GH | 1 | LCPE130i | 本色 |




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
PDWG.NO: 0013-1

深圳市步步精科技有限公司

NAME: 针座 1.25-14P 立贴 带扣 加盖 米黄色
 APPD. JM_Zheng
 CHKD. LYX
 DR. SGF
 PJ. NO.: WT.04.63-85-H012
 SIZE: A4 DRW NO.:
 FINISH: SEE NOTES MAT'L.: SEE NOTES
 SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|---------|------|----------|
| A0 | | | | |

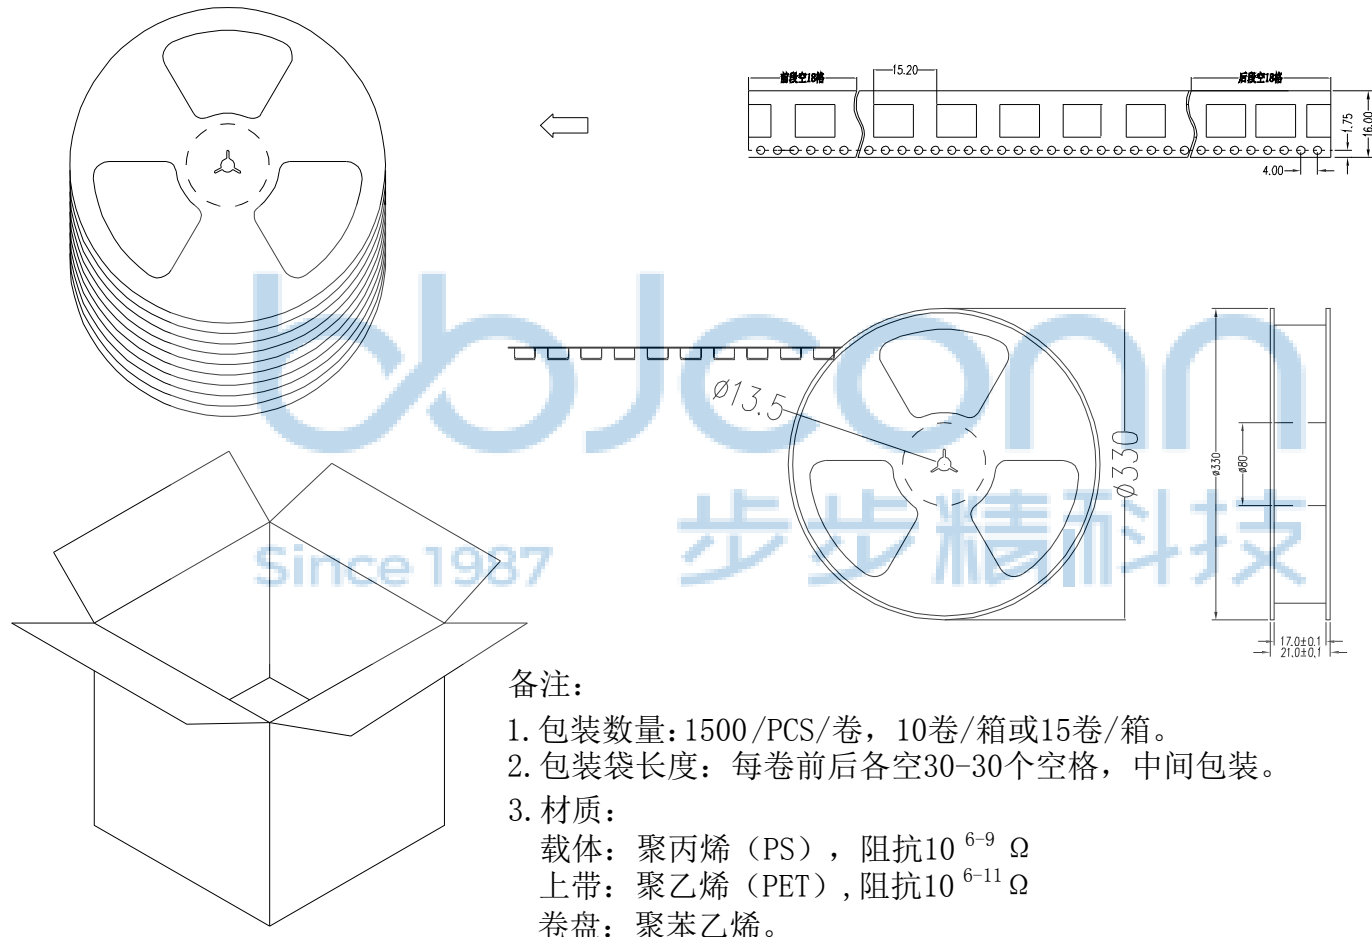

备注：
 1. 包装数量：1500/PCS/卷，10卷/箱或15卷/箱。
 2. 包装袋长度：每卷前后各空30-30个空格，中间包装。
 3. 材质：
 载体：聚丙烯（PS），阻抗 $10^{6-9} \Omega$
 上带：聚乙烯（PET），阻抗 $10^{6-11} \Omega$
 卷盘：聚苯乙烯。
 纸箱规格：345*345*23MM
 纸箱规格：345*345*35MM

| | | | | | |
|--|----------|---|-----|--------------------------------|-----------|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | | 深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X''': ±1" | | NAME: 针座 1.25-14P 立贴 带扣 加盖 米黄色 | |
| APPD. | JM_Zheng | PJ. NO.: WT.04.63-85-H012 | | SIZE: A4 DRW NO.: | |
| CHKD. | LYX | FINISH: SEE NOTES | | MAT'L.: SEE NOTES | |
| PDWG.NO: | 0013-1 | DR. | SGF | SCALE: N/A | REV.: A0 |
| | | | | UNIT: mm | PAGE: 2/2 |