


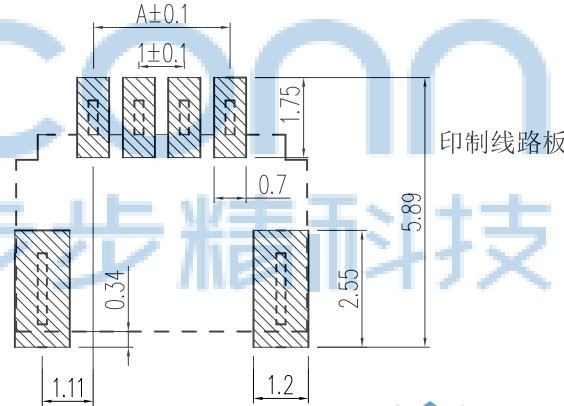
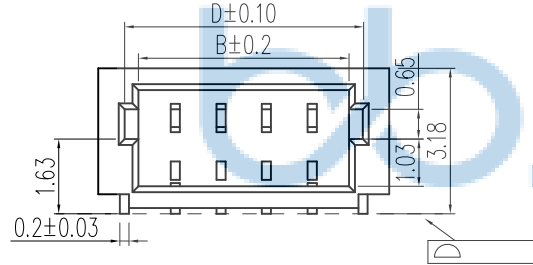


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				



1. 技术参数:
 1.1 额定电流: 0.5A AC/DC
 1.2 额定电压: 50V
 1.3 耐电压: 500V ACminute
 1.4 接触电阻: 20mΩ MAX
 1.5 绝缘电阻: 100MΩ MIN
 2. 工作温度: -25℃~+85℃

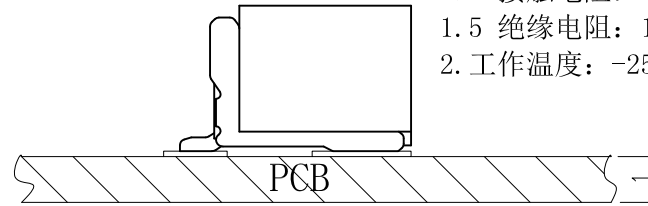

截面 A-A

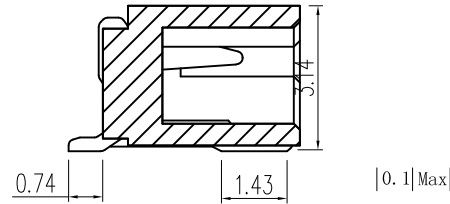

印制线路板

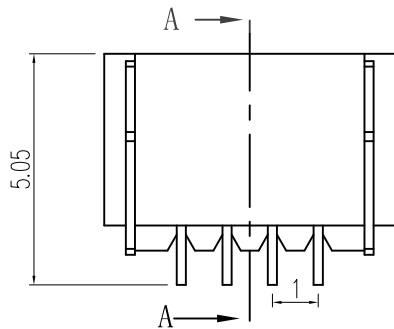

Circuits	Dimensions (mm)				Circuits	Dimensions (mm)			
	A	B	C	D		A	B	C	D
1. OWT-2P	1.0	2.6	4.30	3.20	1. OWT-12P	11.0	12.6	14.30	13.20
1. OWT-3P	2.0	3.6	5.30	4.20	1. OWT-13P	12.0	13.6	15.30	14.20
1. OWT-4P	3.0	4.6	6.30	5.20	1. OWT-14P	13.0	14.6	16.30	15.20
1. OWT-5P	4.0	5.6	7.30	6.20	1. OWT-15P	14.0	15.6	17.30	16.20
1. OWT-6P	5.0	6.6	8.30	7.20	1. OWT-16P	15.0	16.6	18.30	17.20
1. OWT-7P	6.0	7.6	9.30	8.20					
1. OWT-8P	7.0	8.6	10.30	9.20					
1. OWT-9P	8.0	9.6	11.30	10.20					
1. OWT-10P	9.0	10.6	12.30	11.20					
1. OWT-11P	10.0	11.6	13.30	12.20					





THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
 PDWG.NO: 0013-1

深圳市步步精科技有限公司

NAME: 针座 1.0-6P 卧贴 米黄色	PJ. NO.: WT.10.61-73-H001
SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm	PAGE: 1/2

NO	物料名称	规格型号	数量(PCS)	材质	镀涂	物料编码
①	基座	1.0	1	LCPE130i	本色	
②	焊片	1.0	2	磷铜	锡	
③	插针	1.0	2~20	磷铜	锡	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

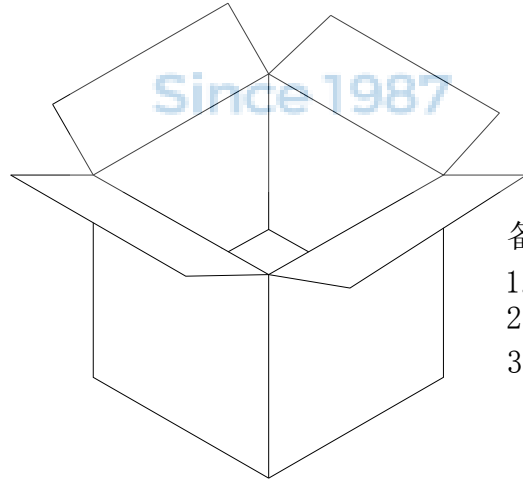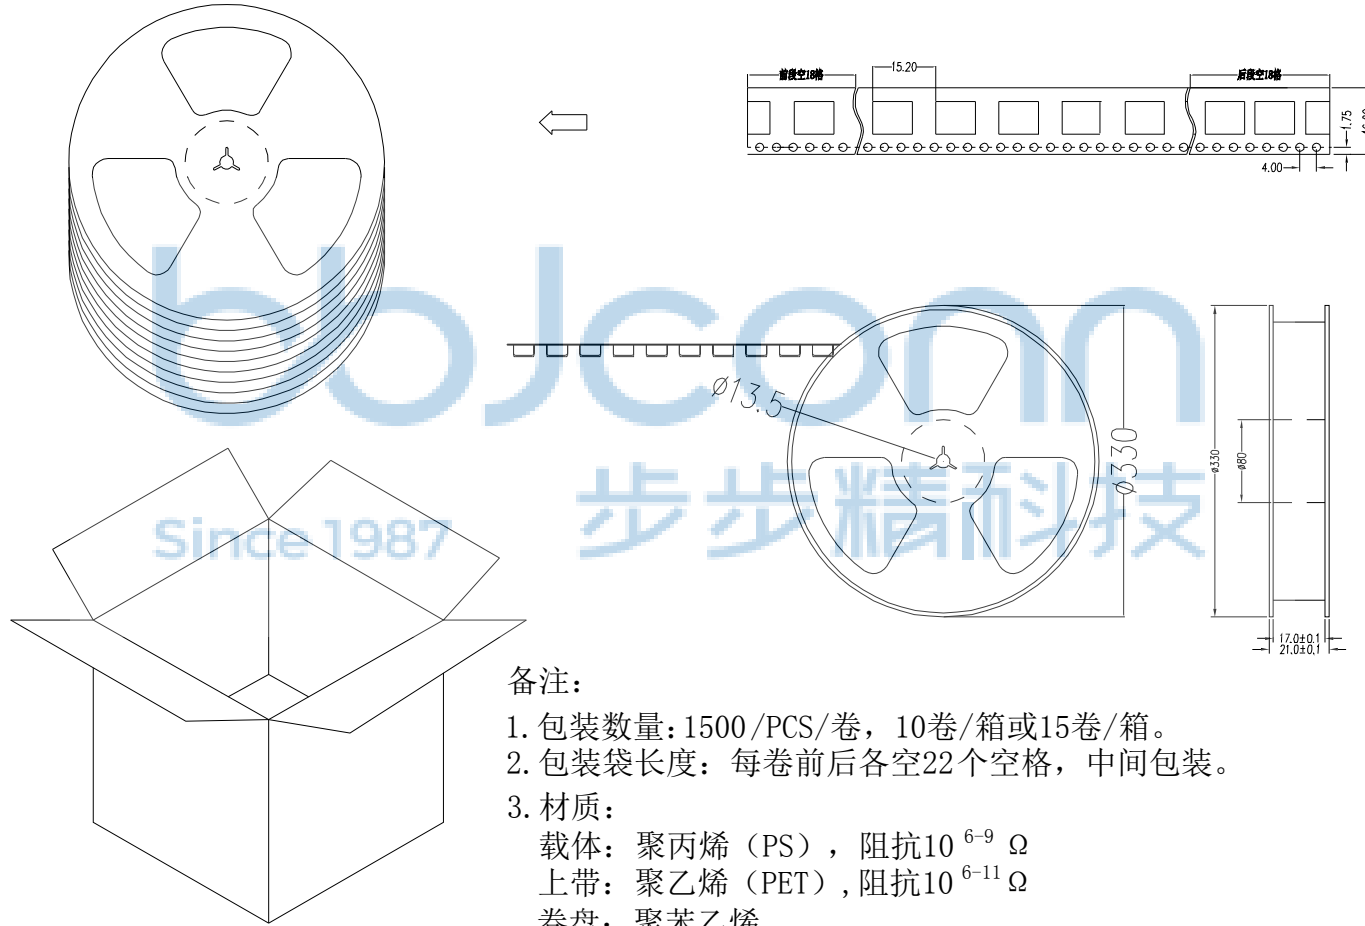

备注:

1. 包装数量: 1500/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空22个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .X''': ±1'		NAME: 针座 1.0-6P 卧贴 米黄色	
APPD. JM_Zheng	CHKD. LYX	DR. SGF	PJ. NO.: WT.10.61-73-H001 SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0013-1		SCALE: N/A		REV.: A0	UNIT: mm PAGE: 2/2