

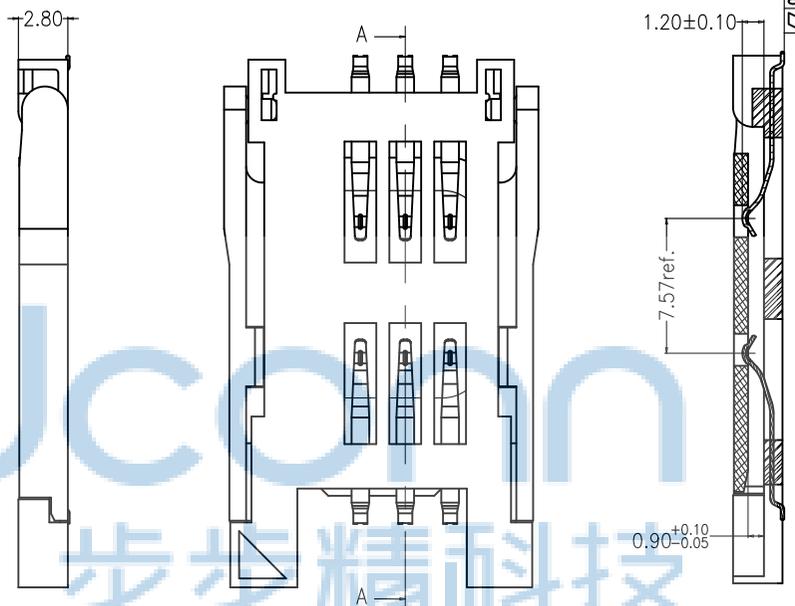



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

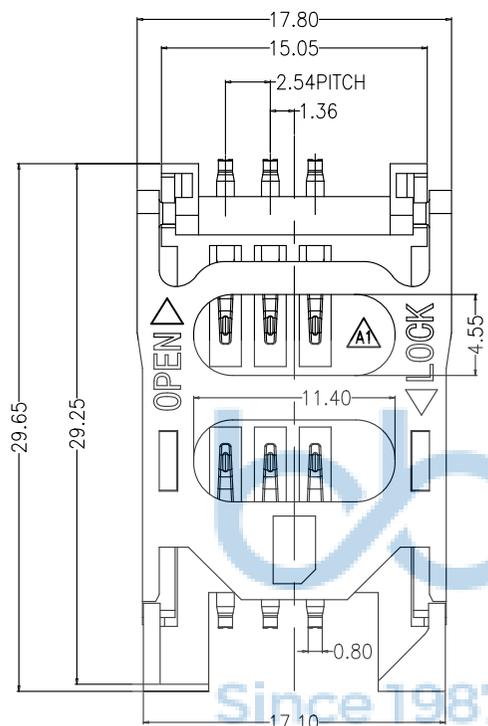

- NOTES:
- MATERIAL:**
HOUSING: LCP UL94V-0.BLACK/WHITE
COVER:LCP UL94V-0.BLACK/WHITE
CONTACT: C5191
 - PLATING:**
CONTACT: 100u" Ni UNDERPLATED OVERALL
G/F PLATED ON CONTACT AREA
100u" MATTE TIN PLATED ON SOLDER AREA
 - TECHNICAL SPECIALITY:**
RATED VOLTAGE: 50V AC MAX.
CURRENT RATING: 1.0A MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
CONTACT RESISTANCE: 100mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
OPERATING TEMPERATURE: -40~+85°

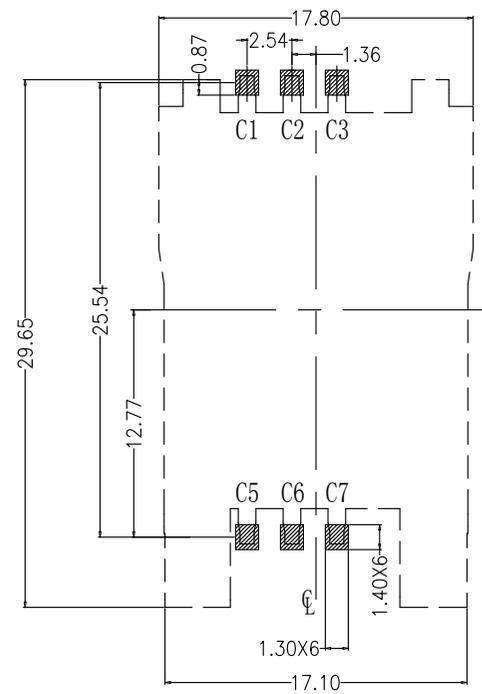

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05




SIM卡引脚功能定义

触电极	分配	触电极	分配
C1	电源电压 VCC	C5	地 GND
C2	复位 RST	C6	编程电压 VPP
C3	时钟 CLK	C7	输入/输出 I/O


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD. JM_Zheng		NAME: 卡座 SIM 6P 掀盖式 (电表) 全塑 无柱 H=2.8 黑色	
CHKD. LYX		PJ. NO.: 142-212-060001-V8G	
DR. LHC		SIZE: A4 DRW NO.:	
PDWG.NO: 0302-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

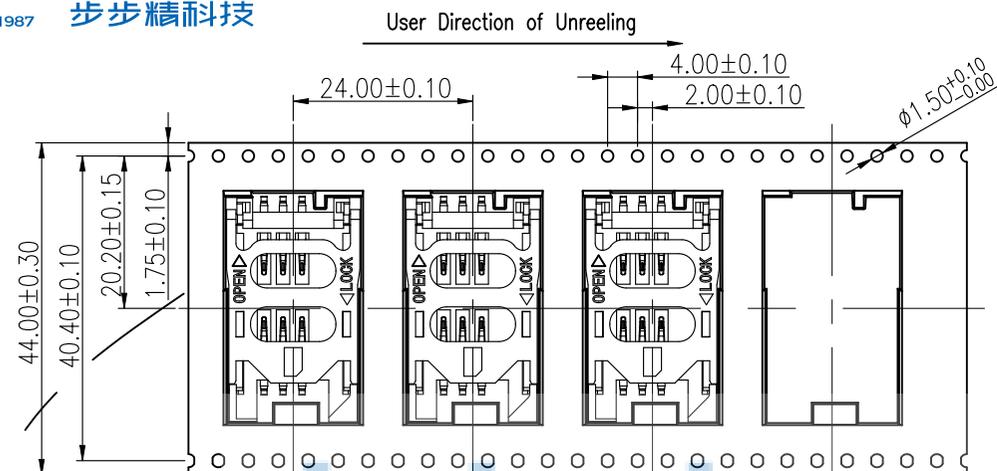



NOTES

1. NUMBER OF CONNECTORS: 700PCS/REEL
2. LEAD TAPE LENGTH

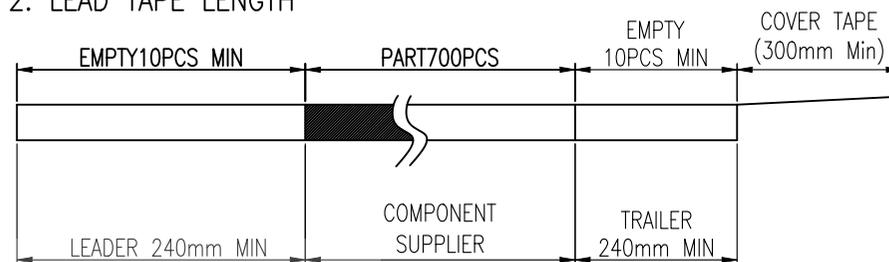

3. QUANTITY: 4200PCS/CARTON

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g

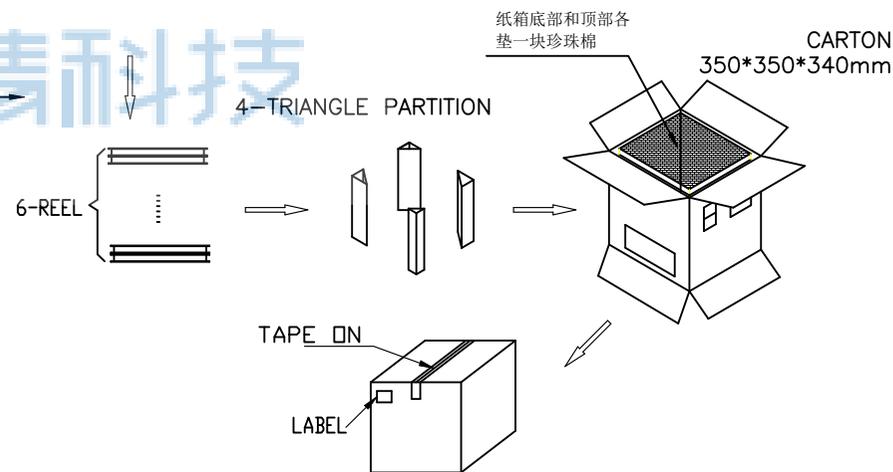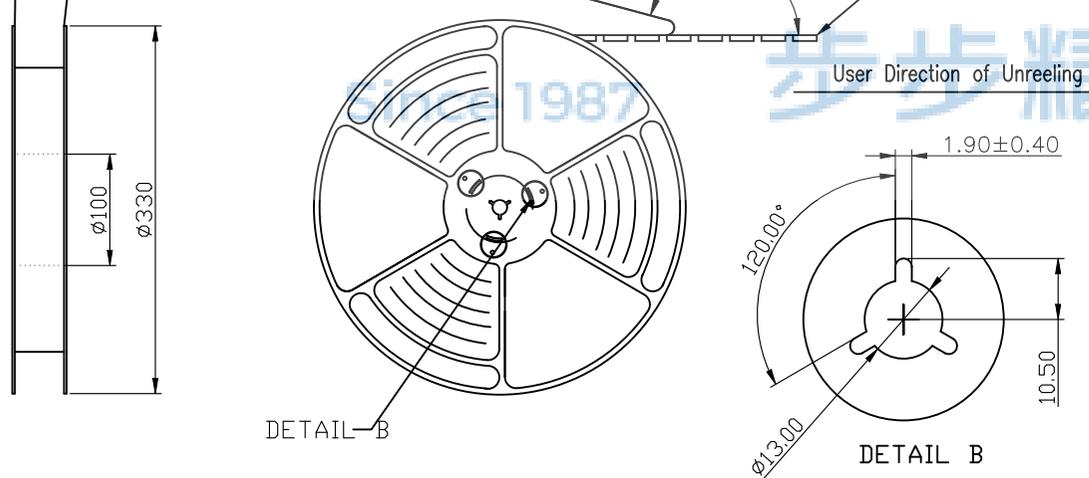

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: 卡座 SIM 6P 掀盖式 (电表) 全塑 无柱 H=2.8 黑色 PJ. NO.: 142-212-060001-V8G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES	
APPD.	JM_Zheng	SCALE: N/A		REV.:	A0
CHKD.	LYX	UNIT:	mm	PAGE:	1/1
DR.	LHC	PDWG.NO: 0302-1			