

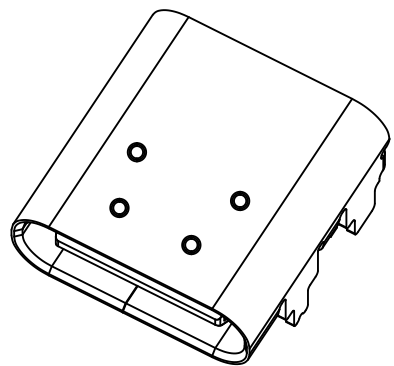
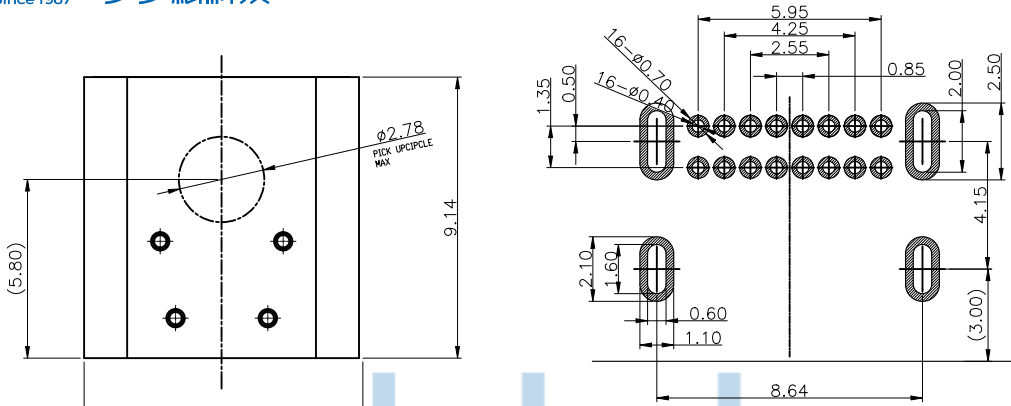

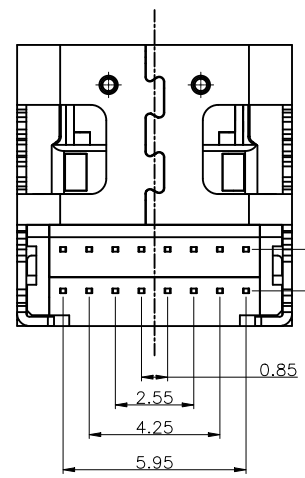
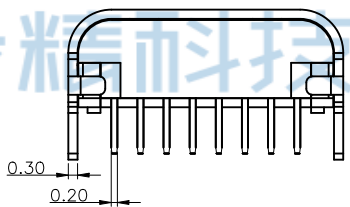


REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

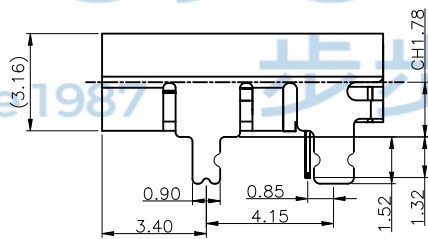

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)  
TOLERANCE FOR PCB LAYOUT IS  $\pm 0.05$   
KEEP OUT AREA

- NOTES:
- MATERIAL:  
MOLDING: LCP UL94 V-0  
CONTACT: COPPER ALLOY.  
GOLD PLATED Min ON CONTACT AREA, 100u'  
Min TIN (LEAD FREE) ON SOLDER AREA,  
SHELL: SUS304-H, T=0.30 $\pm$ 0.03mm  
50u' NICKEL PLATING OVER ALL.  
MIDDLE SHILD: SUS304-H, T=0.20 $\pm$ 0.03mm
  - MECHANICAL:  
INSERTION: 5 $\sim$ 20N.  
EXTRACTION: 8 $\sim$ 20N AFTER TEST.  
DURABILITY: 10000 CYCLES
  - ELECTRICAL:  
CURRENT: 5A FOR VBUS;  
1.25A FOR GND PIN.  
0.25A FOR OTHER.  
VOLTAGE: 20 V MAX  
WITHSTANDING VOLTAGE: 100V AC R. M. S.  
CONTACT RESISTANCE: 40m $\Omega$  MAX.  
INSULATION RESISTANCE: 100M $\Omega$  MIN.
  - ENVIRONMENTAL  
TEMPERATURE RANGE -35 $^{\circ}$  C  $\sim$  +85 $^{\circ}$  C

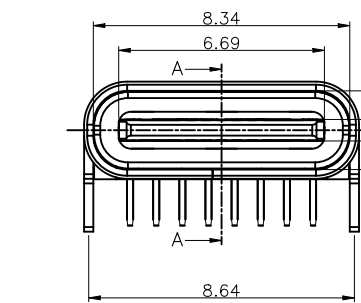

SECTION A-A


THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG,NO: 0627-1

 深圳市步步精科技有限公司

.X:  $\pm 0.38$  X':  $\pm 3'$   
.XX:  $\pm 0.25$  .X':  $\pm 2'$   
.XXX:  $\pm 0.13$  .XX':  $\pm 1'$

NAME: TYPE-C 16P 母座 L=9.14 CH=1.78  
板上四脚插 双排DIP 端子脚长1.32

APPD. JM\_Zheng

 PJ. NO.: UC.01.11-1W-0011

CHKD. TSP


SIZE: A4 DRW NO.:

DR. LYX

FINISH: SEE NOTES MAT'L.: SEE NOTES  
SCALE: REV.: A0 UNIT: mm PAGE: 1/3



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

出料方向  
PULL OUT DIRECTEDN


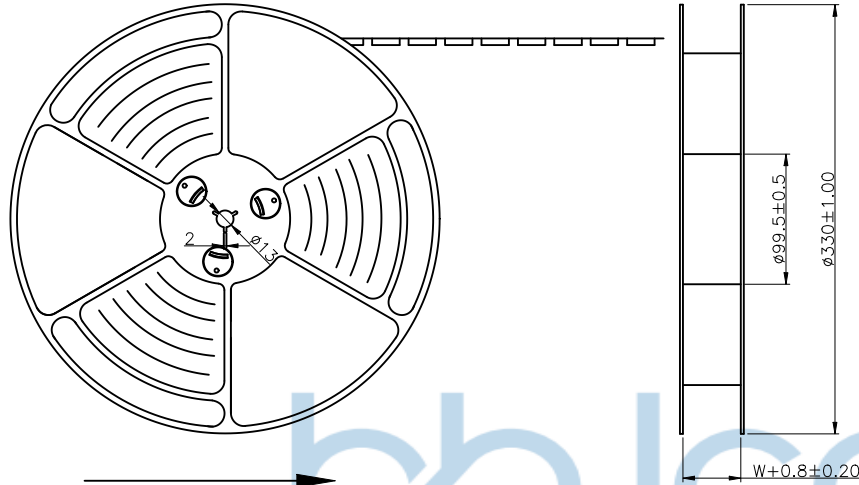


NOTES


- 帶子引導長度  
LEAD TAPE LENGTH  
出料方向  
PULL OUT DIRECTEON

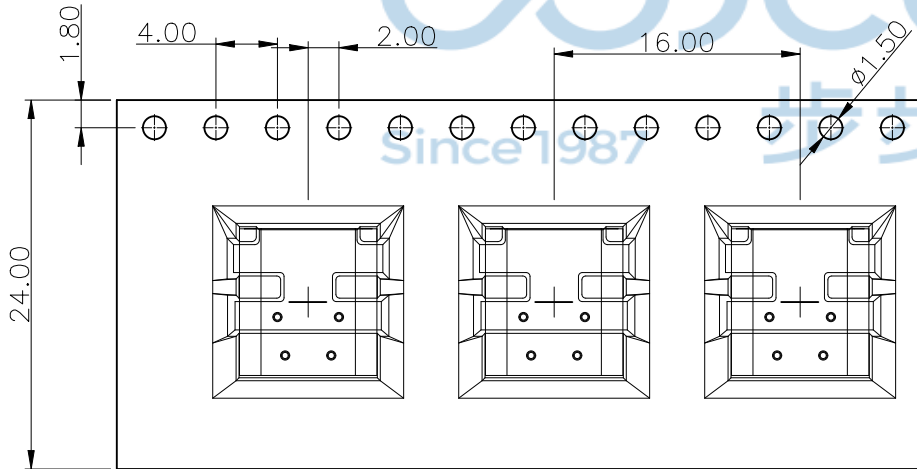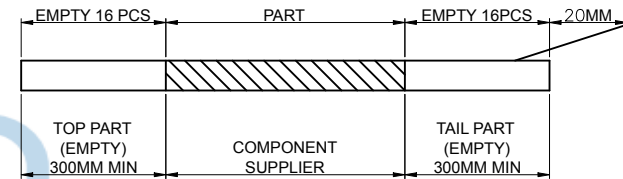

- 上帶剝力力為：0.1~1.3N(10.2gf~130gf)  
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)  
出貨運輸過程中一定注意：  
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：  
卷帶在運輸過程中不能散開  
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION



載帶卷料方向



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.  
PDWG,NO: 0627-1



深圳市步步精科技有限公司

.X: ±0.38 X': ±3'  
.XX: ±0.25 X'': ±2'  
.XXX: ±0.13 .XX': ±1'

NAME: TYPE-C 16P 母座 L=9.14 CH=1.78  
板上四脚插 双排DIP 端子脚长1.32

APPD. JM\_Zheng

PJ. NO.: UC.01.11-1W-0011

CHKD. TSP

SIZE: A4 DRW NO.:

DR. LYX



FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: REV.: A0 UNIT: mm PAGE: 2/3

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

at small positioning hole of the carrier tape side).  
標籤黏貼處 (朝捲裝包材的小定位孔一側)

Location of label sticking (label

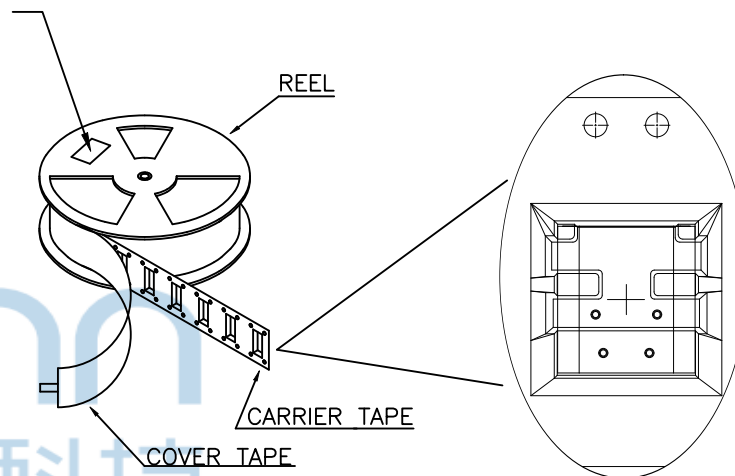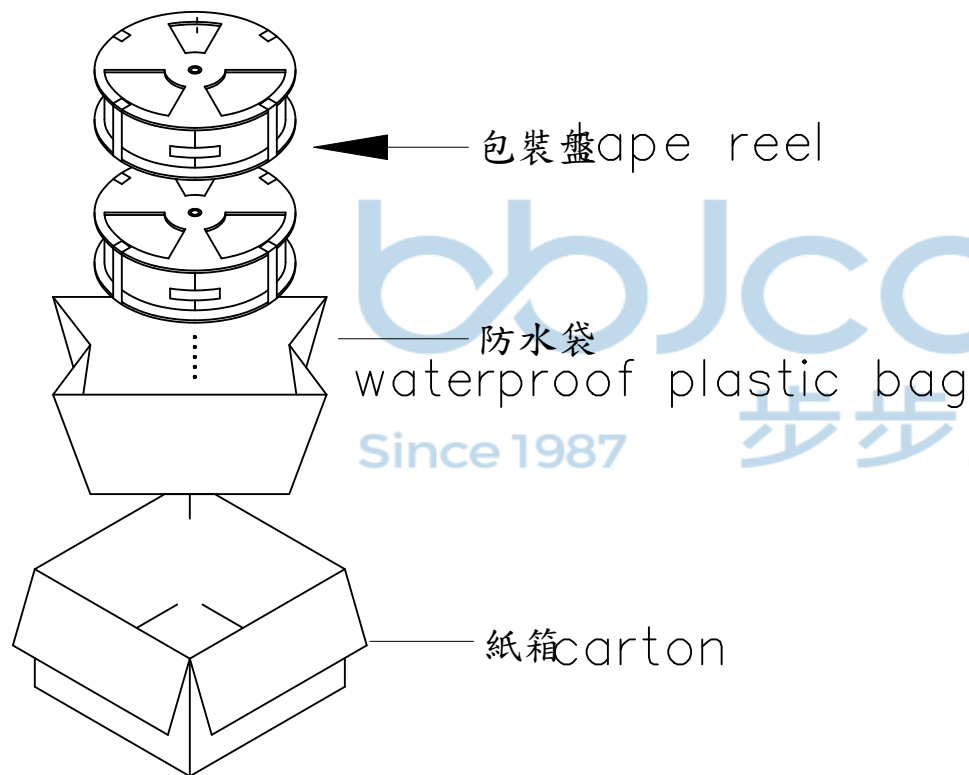

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格.
2. 以上膠帶覆蓋下包裝帶經包裝機冷封包裝
3. 每個紙箱放2個珍珠棉
4. 將裝滿產品的卷盤放入紙箱并以膠帶封口



THIS DOCUMENT IS THE  
SOLE PROPERTY OF  
BBJconn Technology Co.,Ltd.  
Corporation AND SHOULD  
NOT BE USED IN WHOLE  
OR IN PART WITHOUT  
PRIOR WRITTEN PERMISSION.

**深圳市步步精科技有限公司**

.X: ±0.38 X': ±3'  
.XX: ±0.25 .X': ±2'  
.XXX: ±0.13 .XX': ±1'

NAME: TYPE-C 16P 母座 L=9.14 CH=1.78  
板上四脚插 双排DIP 端子脚长1.32

APPD. JM\_Zheng

PJ. NO.: UC.01.11-1W-0011

CHKD. TSP

SIZE: A4 DRW NO.:

PDWG,NO: 0627-1

FINISH: SEE NOTES MAT'L.: SEE NOTES

DR. LYX

SCALE: REV.: A0 UNIT: mm PAGE: 3/3

包裝容量 (PACKING CAPACITY)			重量 WEIGHT (Kg)		
PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
700	10	7000			