

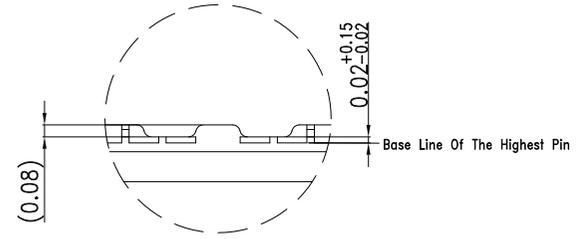
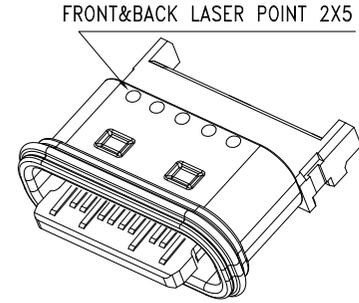
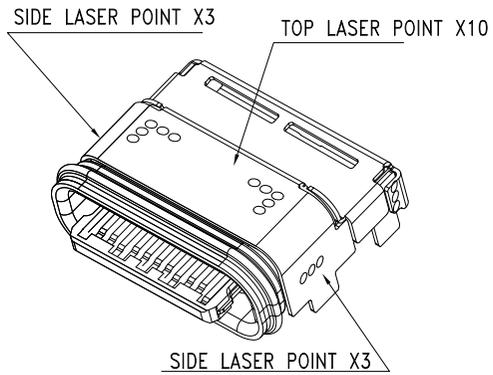
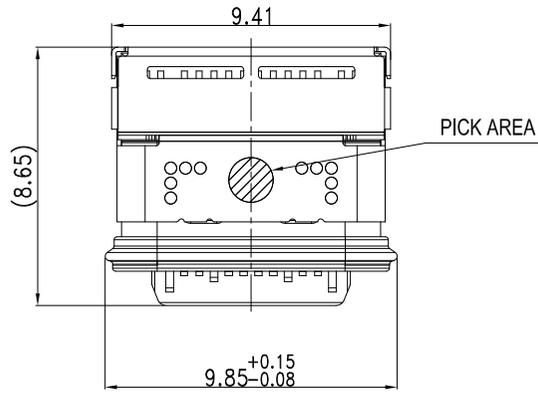





| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0 | | Initial release | / | TSP |

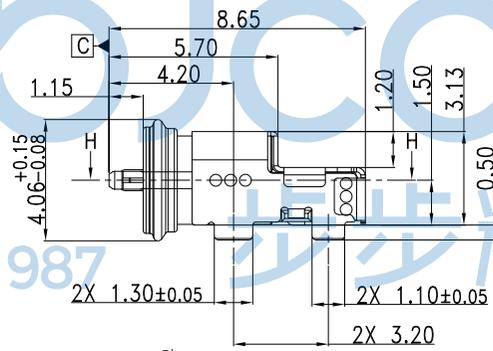

Detail H (Scale : 5:1)

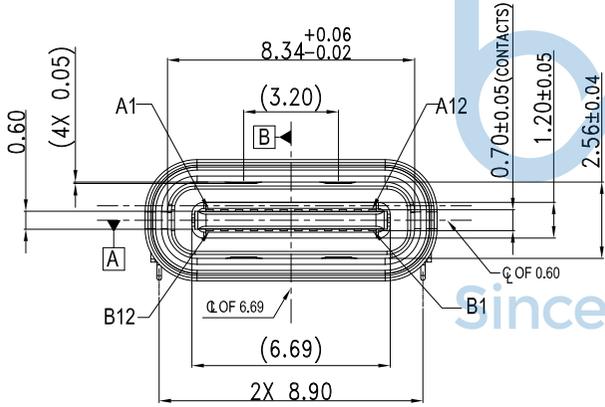

0.08 24X SMT TAILS (BEFORE IR)
0.10 24X SMT TAILS (AFTER IR)

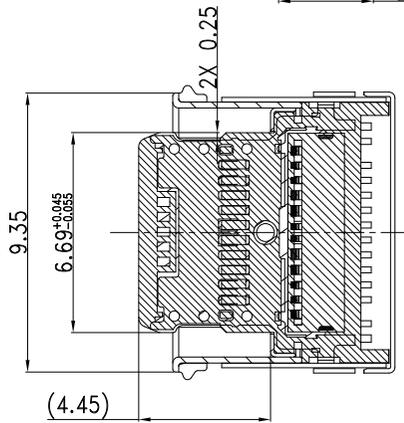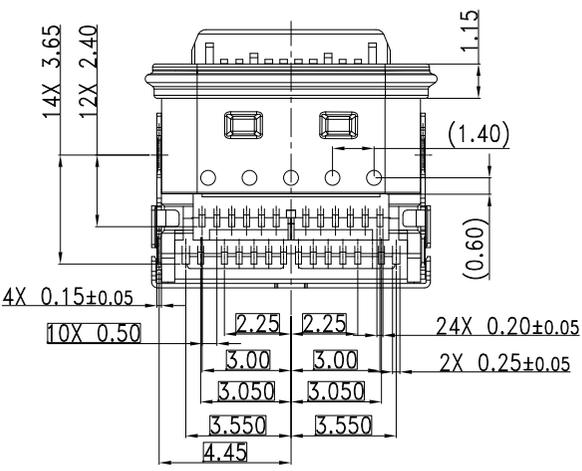

SECTION H-H (SCALE 1:1)



| 8 | LIM | 1 | CHN-LIMS | BLACK |
|-----|-----------------|------|--------------------------|---|
| 7 | SMALL SHELL | 1 | STAINLESS STEEL | NI PLATED OR CLEANING |
| 6 | MAIN SHELL | 1 | STAINLESS STEEL | NI PLATED OR CLEANING |
| 5 | OUTOR SHELL | 1 | STAINLESS STEEL | SOLDER NICKEL: 30" MIN |
| 4 | MID PLATE | 1 | STAINLESS STEEL | NICKEL: 30U" MIN |
| 3 | BOTTOM TERMINAL | 1 | COPPER ALLOY | MATING AREA : Au30u"MIN SOLDER TAIL-Au 3-8u", 50-150u" NICKEL OVERALL. |
| 2 | TOP TERMINAL | 1 | COPPER ALLOY | MATING AREA : Au30u"MIN SOLDER TAIL-Au 3-8u", 50-150u" NICKEL OVERALL. |
| 1 | MOLDING HOUSING | 1 | HIGH TEMPERATURE PLASTIC | BLACK |
| TEM | DESCRIPTION | Q'TY | MATERIAL | |

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0869-2

深圳市步步精科技有限公司

NAME: TYPE-C 24P 防水母座 SMT 四脚插 舌片外漏 1.15 L=7.50 CH=1.50 IPX8 编带




APPD. JM_Zheng PJ. NO.: 126-221-240001-M2G

CHKD. LYX SIZE: A4 DRW NO.:

DR. TSP FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/3


| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0 | | Initial release | / | TSP |

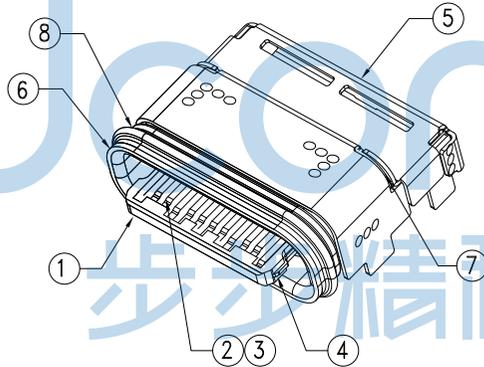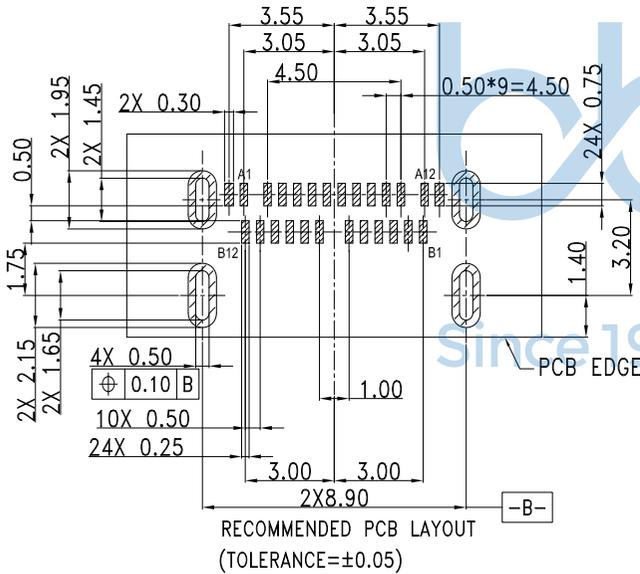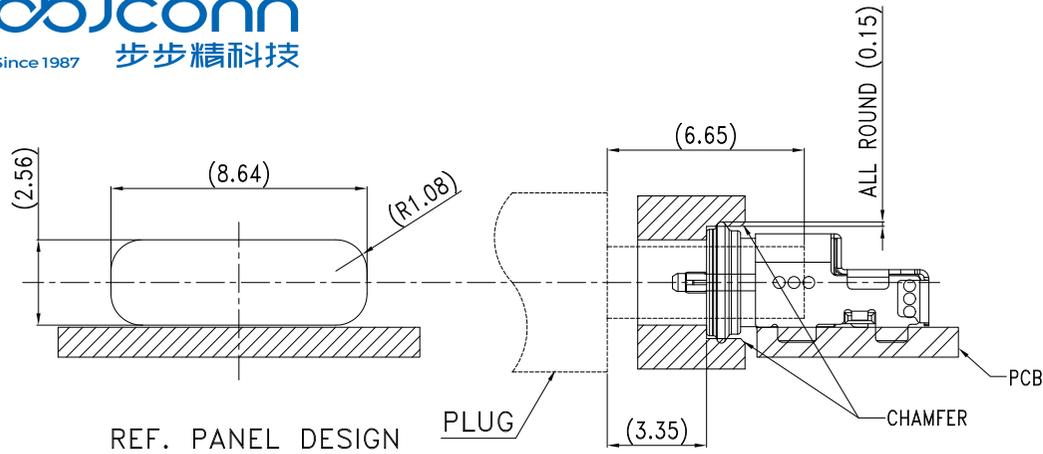

NOTES/注释:

- MATERIAL/材料: SEE TABLE/见下表
- GENERAL SPECIFICATION/通用特性:
 - COPLANARITY /共面度: 0.10 Max.
 - CURRENT RATING: 5A / 额定电流: 5安培
 - CONTACT RESISTANCE: 40mΩ MAX (INITIAL).
INSULATION RESISTANCE: 100MΩ Min
接触电阻: 40毫欧最大(初始值) / 绝缘电阻: 100MΩ Min
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC
耐电压: 100伏交流
 - MECHANICAL CHARACTERISTICS:
INSERTION FORCE: 5~20N EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
力学特性: 初始插入力: 5~20N 拔出力: 8~20N
耐久后拔出力: 6~20N
 - DURABILITY: 10000 CYCLES / 耐久性: 10000次
 - PACKAGING TYPE: CARRIER TAPE./ 包装类型: 载带包装
- WATERPROOF CLASS IPX8/防水等级 IPX8
- DIMENSIONING SHALL BE INTERPRETED PER ASME Y14.5M
尺寸标注基于ASME Y14.5M 1994标准规范

| Pin No | Signal Name | Mating Sequence | Pin No | Signal Name | Mating Sequence |
|--------|-------------|-----------------|--------|-------------|-----------------|
| A1 | GND | First | B12 | GND | First |
| A2 | TX1+ | Second | B11 | RX1+ | Second |
| A3 | TX1- | Second | B10 | RX1- | Second |
| A4 | Vbus | First | B9 | Vbus | First |
| A5 | CC1 | Second | B8 | SBU2 | Second |
| A6 | D+ | Second | B7 | D- | Second |
| A7 | D- | Second | B6 | D+ | Second |
| A8 | SBU1 | Second | B5 | CC2 | Second |
| A9 | Vbus | First | B4 | Vbus | First |
| A10 | RX2- | Second | B3 | TX2- | Second |
| A11 | RX2+ | Second | B2 | TX2+ | Second |
| A12 | GND | First | B1 | GND | First |
| SHELL | | GND | SHELL | | GND |

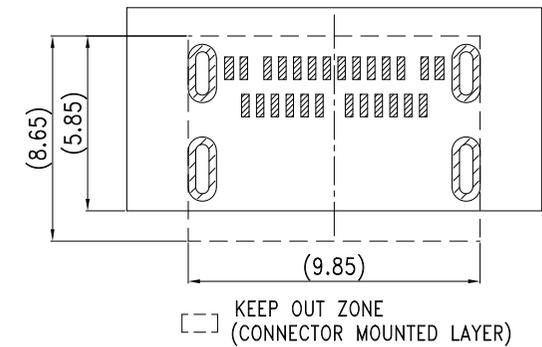

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0869-2

APPD. JM_Zheng

CHKD. LYX

DR. TSP

深圳市步步精科技有限公司

NAME: TYPE-C 24P 防水母座 SMT 四脚插 舌片外漏1.15 L=7.50 CH=1.50 IPX8 编带



PJ. NO.: 126-221-240001-M2G

SIZE: A4 DRW NO.:


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/3


| REV. | ECN NO | CONTENT | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0 | | Initial release | / | TSP |

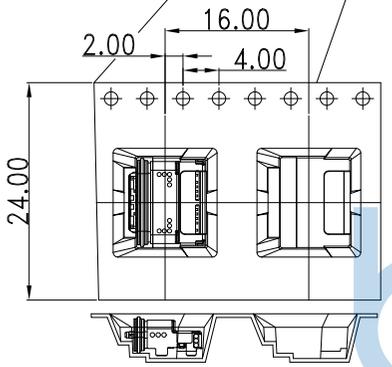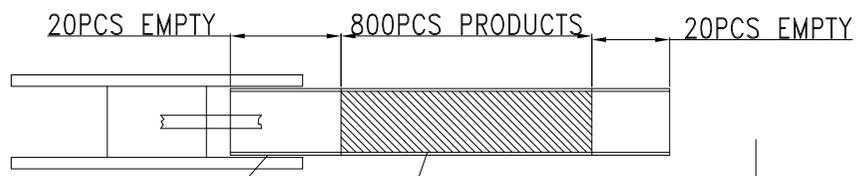


CUSTOMER UNWINDING DIRECTION

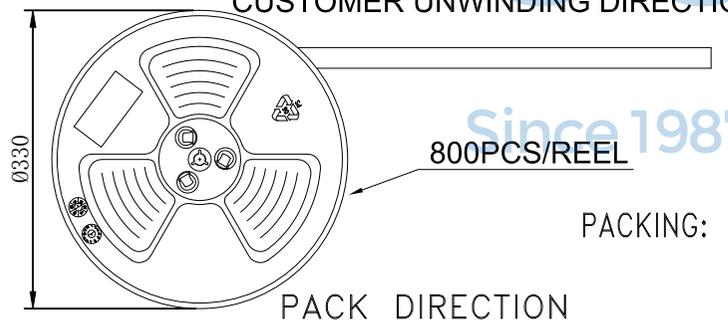


PACKING: 1. 800 PCS/REEL.
2. 10 REEL/Carton

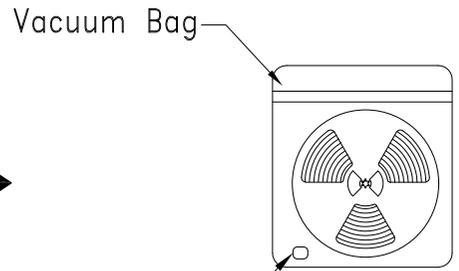


No.1: 1 Reel/Bag

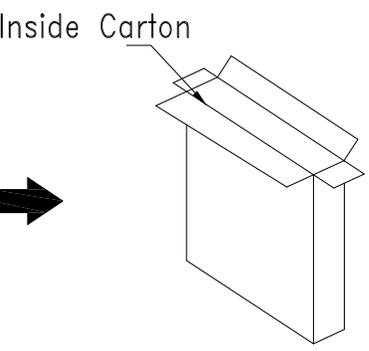

No.2: 1 Bag / Inside Carton

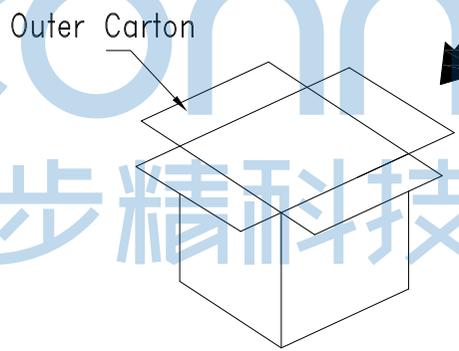

No.3: 10 Inside Carton/Out Carton



No.4: 8000 Pcs/Out Carton



| | | | | | |
|--|----------|--|-----|--|-----|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | | 深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' .X': ±2' .XX': ±1' | | NAME: TYPE-C 24P 防水母座 SMT 四脚插 舌片外漏1.15 L=7.50 CH=1.50 IPX8 编带 PJ. NO.: 126-221-240001-M2G SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3 | |
| APPD. | JM_Zheng | CHKD. | LYX | DR. | TSP |
| PDWG.NO: | 0869-2 | | | | |