






REV.	ECN NO	CONTENT	DATE	ENGINEER
AO				

带灯轻触主要技术指标: Llluminated Tact Switch Main Specifications:


气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist. Test
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	▶260gf±50gf	10W times	12±1 hours.
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC	≥100MΩ	160gf±50gf	10W times	12±1 hours.

灯光选型表


双色灯光	灯光代码	电原理图
蓝/红双色光(宽脚蓝)	BL/R Blue/Red	
绿/红双色光(宽脚绿)	G/R Green/Red	
白/红双色光(宽脚白)	W/R White/Red	
蓝/黄双色光(宽脚蓝)	BL/Y Blue/yellow	
橙/蓝双色光(宽脚橙)	O/BL Orange/Blue	
....

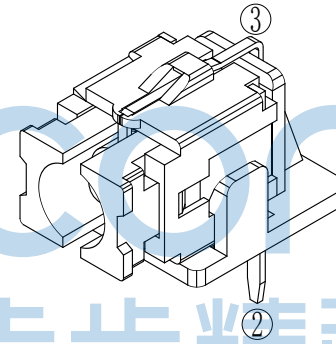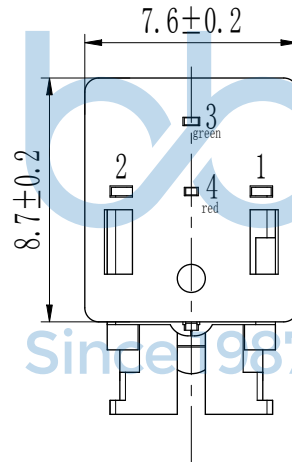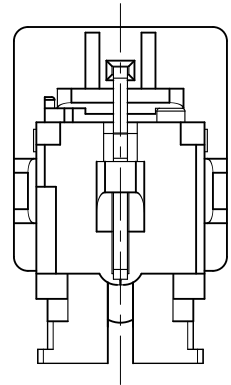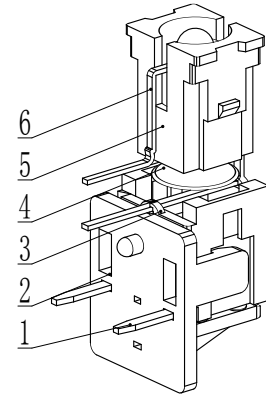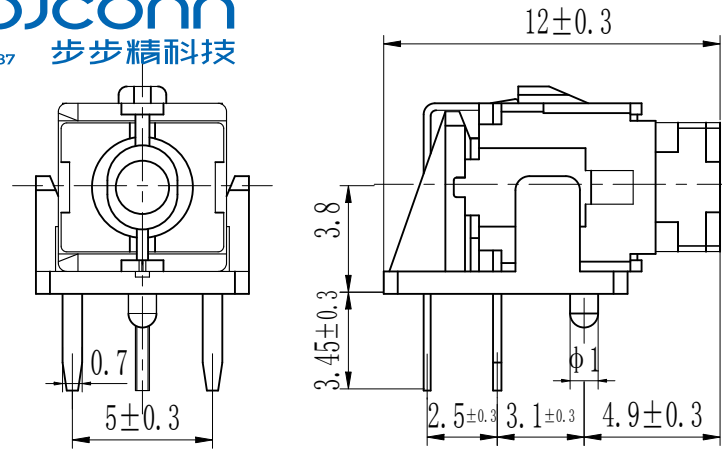

元件面孔位图

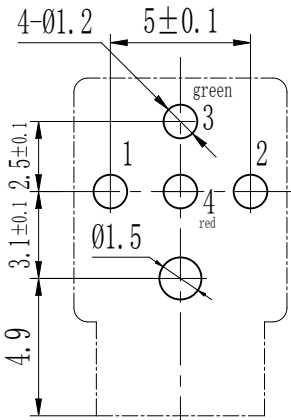

电原理图



序号	名称	材料	数量	镀层/颜色	备注
6	LED 灯		1	透明	
5	按钮	PPA	1	瓷白	借A0630
4	弹片	不锈钢	1	Ag	借A0630
3	塑座	PPA	1	黑色	借A0630
2	定位板	PPA	1	黑色	A0670
1	卡件	H62	1	Ag	借A0630


THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG,NO: 0436-1

深圳市步步精科技有限公司


NAME:	轻触开关 7.6x8.7x12 侧插 红白双色灯 不锈钢弹片 260GF 瓷白按钮		
APPD.	JM_Zheng	PJ. NO.:	TS. 43. 27-21-3Z-02
CHKD.	LYX	SIZE:	A4 DRW NO.:
DR.	TSP	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	AO
		UNIT:	mm
		PAGE:	1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

3 (>?)ôlÖ

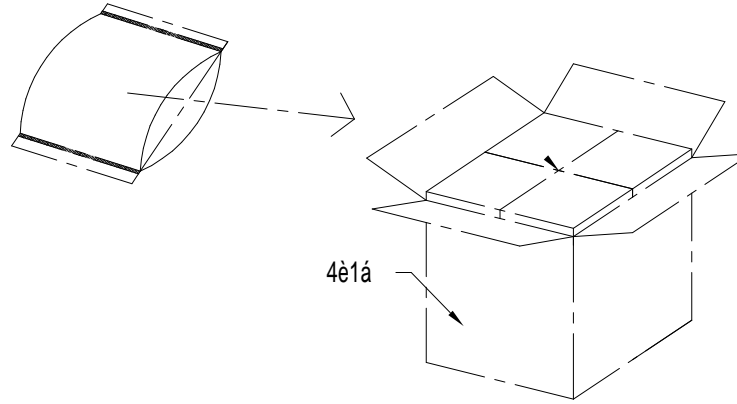

@ ñ 71@



1. 包装要求:

- 1.1 每个PE袋包装200pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计4000pcs;
- 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		\$! c 2!•!•2!0 ° 9L€ œ (
PDWG:NO: 0436-1		APPD. JM_Zheng CHKD. LYX DR. TSP	NAME: E«@ 0£ [[x 40,-ü8e&ÿ =K8JÒ i(w *) +,-9• PJ. NO.: 76 = SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2