
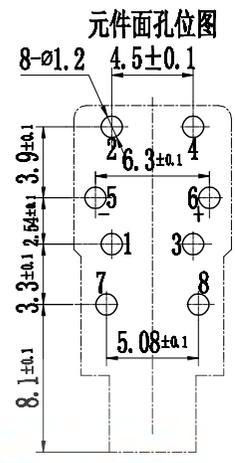
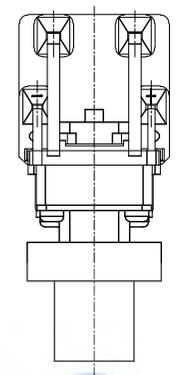
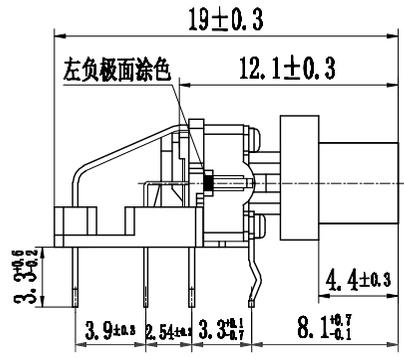


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

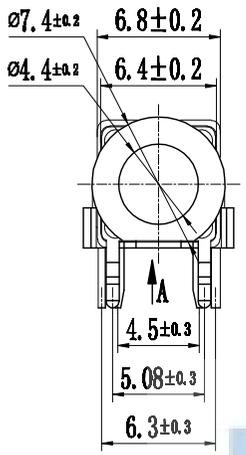

带灯转触主要技术指标: Illuminated Tact Switch Main Specifications:




气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC
-25℃ 至 +75℃	30V DC, 30mA	≤0.05Ω	250V AC
绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist. Test
≥100MΩ	260gf±50gf	10W times	12±1 hours.
≥100MΩ	160gf±50gf	10W times	12±1 hours.

灯光选型表


灯光	灯光代码
白光	W1 white
红光	R1 Red
绿光	G1 Green
黄光	Y1 Yellow
蓝光	BL1 Blue
..	....

注: 综合图-动作力和灯光按客户要求定制, 产品型号随之而变。

A向翻转+旋转180度  
8.3±0.2

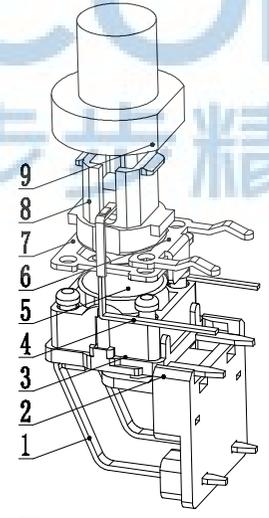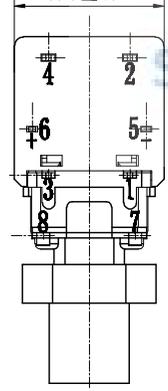

9	圆帽	PC	1	透白	A0714	
8	按钮	PA66	1	瓷白	A0714	
7	塑盖		1	白色	A0714	
6	接地片	H62	1	Ag	A0714	
5	弹片	不锈钢	1	Ag	借A0601	
4	平头LED灯		1	透明	A0714-绿光	
3	塑座	PA66	1	黑色	A0714	
2	定位板	PPA	1	黑色	A0714	
1	卡件	H62	1	Ag	A0714	
序号	零件料号	名称	材料	数量	镀层/颜色	备注



电原理图



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0436-1

APPD. JM\_Zheng

CHKD. LYX

DR. SGF

**深圳市步步精科技有限公司**

NAME: 轻触开关 6.8x6.8x19 侧插 不锈钢弹片 260g 绿色灯 瓷白按钮 本色透明帽




PJ. NO.: TS.43.41-21-3Z-01

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

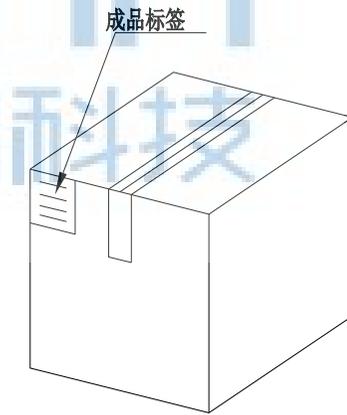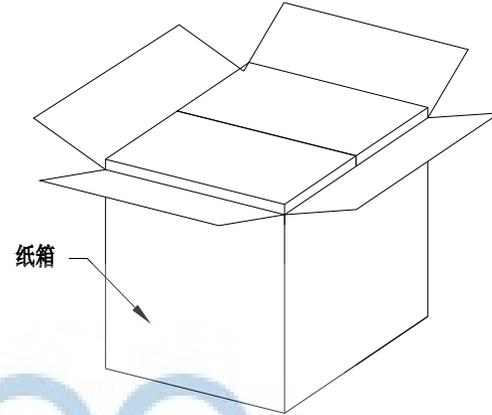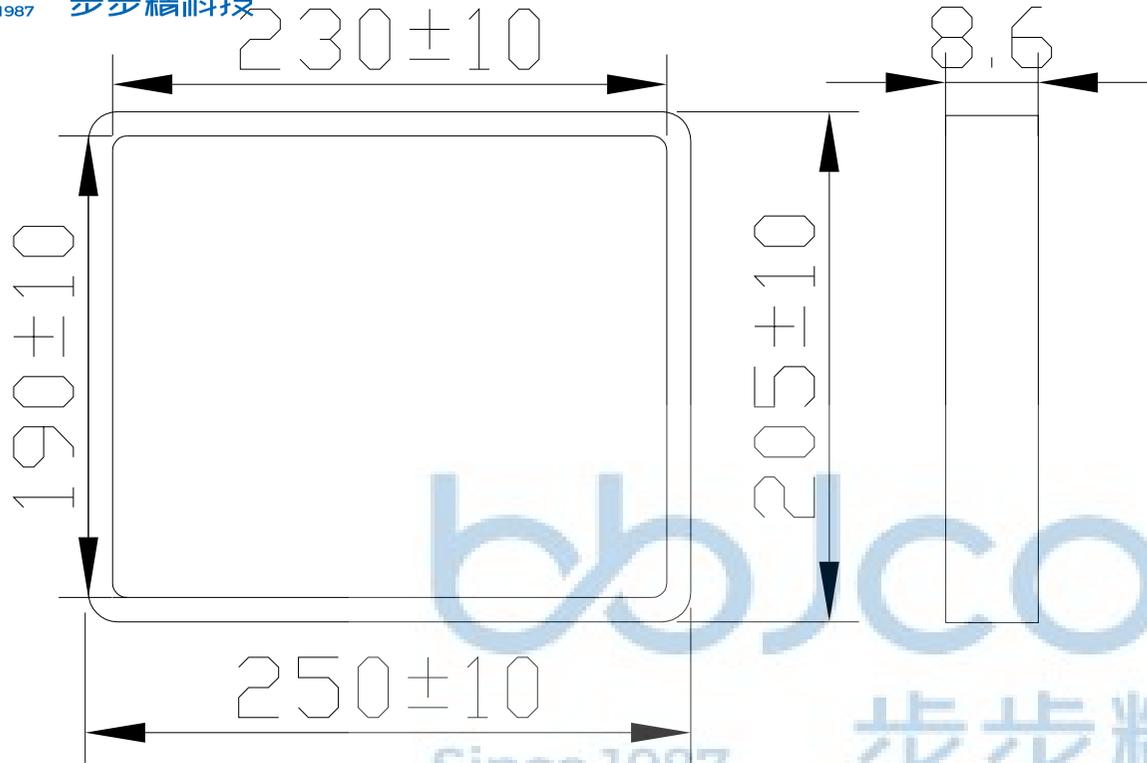

纸箱规格: 350\*210\*290

1. 包装要求:
  - 1.1 每盒吸塑盒包装216pcs;
  - 1.2 每25盘放一箱, 共计5400PCS;
  - 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .X': ±3" .XX: ±0.25    .X'': ±2" .XXX: ±0.13    .X''': ±1"		NAME: 轻触开关 6.8x6.8x19 侧插 不锈钢弹片 260g 绿色灯 瓷白按钮 本色透明帽 电极不同	
APPD.	JM_Zheng	PJ. NO.: TS.43.41-21-3Z-01 SIZE: A4   DRW NO.:		FINISH: SEE NOTES   MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0436-1	DR.	SGF	PAGE: 2/2	