

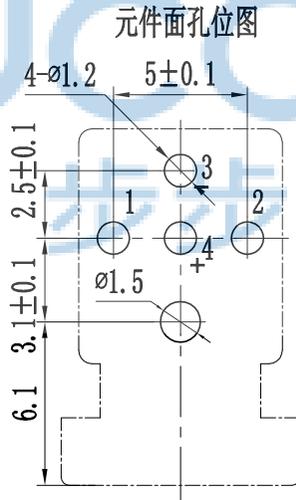
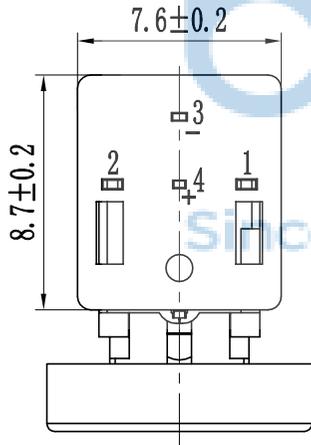
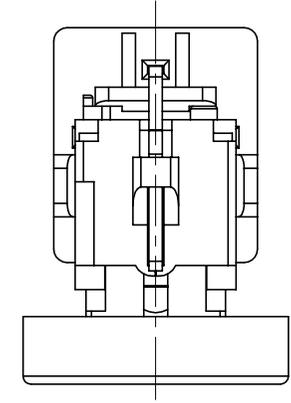
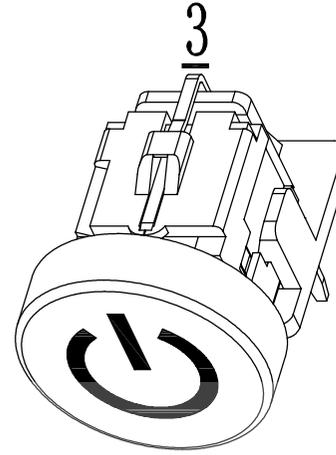
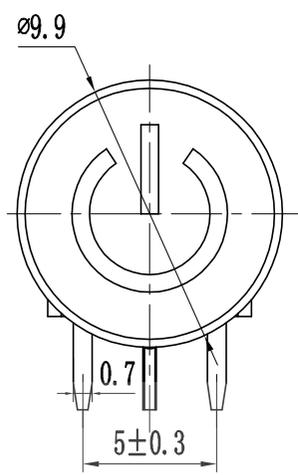


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

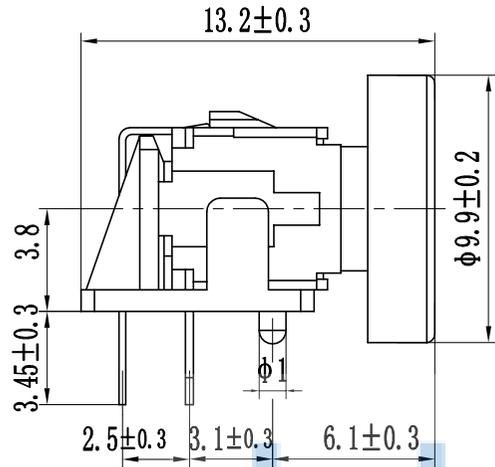

电原理图






序号	名称	材料	数量	镀层/颜色	备注
7	φ9.9小圆帽	ABS	1	银白	
6	定位板	PA66	1	黑色	
5	LED 灯		1		
4	按钮	PA66	1	瓷白	
3	弹片	不锈钢	1	Ag	
2	塑座	PA66	1	黑色	
1	卡件	H62	1	Ag	

轻触开关主要技术指标: Main Specifications:

气候等级 Climate Grade	额定值 Rated Values	接触电阻 Contact Resistance	耐电压 Dielectric Strength	绝缘电阻 Insulation Resistance	动作力 Operating Force	寿命 Life	盐雾试验 Salt mist Test
-25°C 至 +75°C	30V DC, 30mA	≤0.05 Ω	250V AC	≥100MΩ	260gf±50gf	10W times	12±1 hours.

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .X'': ±1'	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: TS.43.73-41-3Z-03 SIZE: A4 DRW NO.:	NAME: 轻触开关 7.6x8.7x13.2 侧插 红蓝双色灯 不锈钢弹片 260GF 瓷白按钮 9.9帽
PDWG.NO: 0436-1	DR. SGF	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

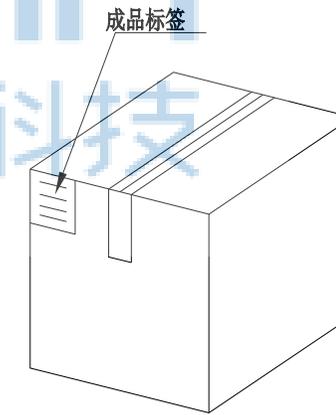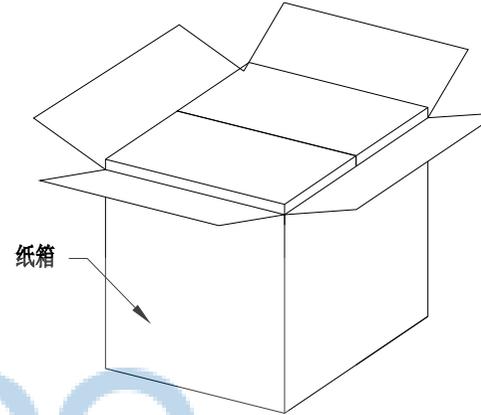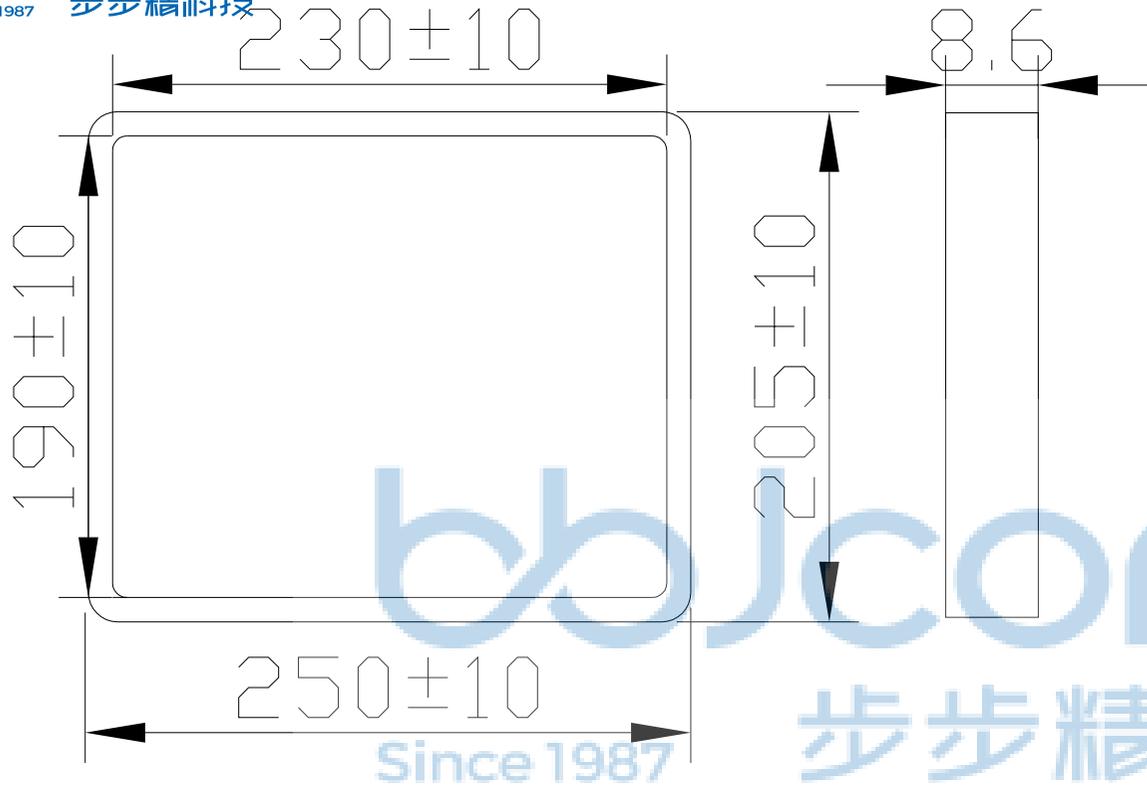

纸箱规格: 350*210*290

1. 包装要求:
- 1.1 每盒吸塑盒包装200pcs; 按键帽 (1000/包)
 - 1.2 每20盘放一箱, 共计4000PCS;
 - 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .XX': ±1"		NAME: 轻触开关 7.6x8.7x13.2 侧插 红蓝双色灯 不锈钢弹片 260GF 瓷白按钮 9.9帽	
APPD.	JM_Zheng	PJ. NO.: TS.43.73-41-3Z-03 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2			
PDWG.NO:	0436-1	DR.	SGF		