

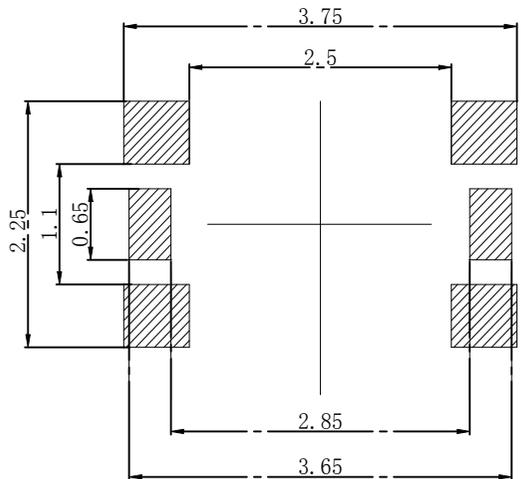

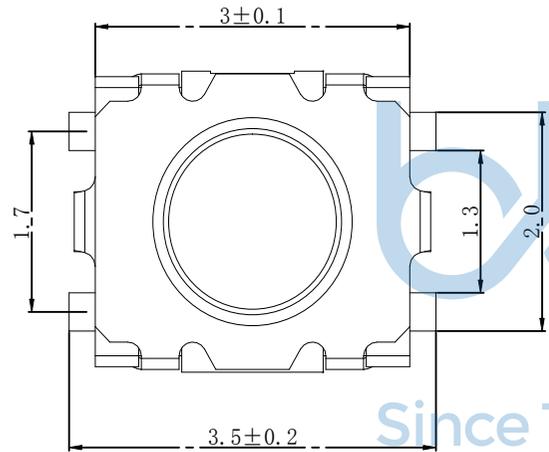
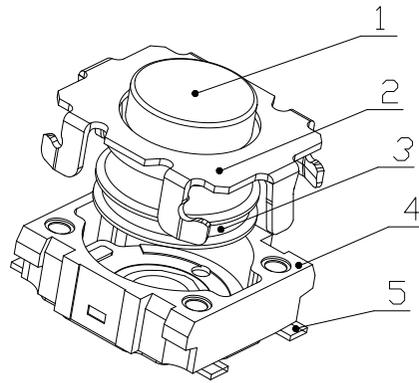


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术参数

- 1. 额定电流: 50mA 12V DC
- 2. 接触电阻: 100毫欧
- 3. 行程: 0.12±0.1mm
- 4. 绝缘电阻: 100兆欧

按力	160±30gf	260±50gf
寿命	10万次	10万次

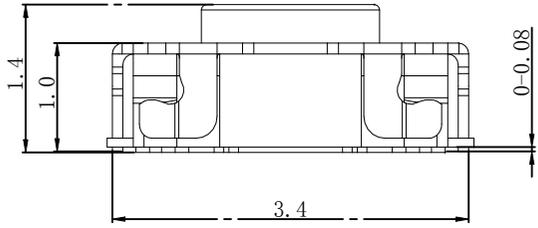

电气原理图

PCB. 焊接尺寸图

1	按钮	LCP	1	清洗
2	盖板	不锈钢0.15	1	
3	簧片	不锈钢覆银	2	
4	底座	LCP	1	清洗
5	卡件	磷铜0.15	1	镀银
序号	名称	材料	数量	备注

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

NAME: 轻触开关 3x3.5x1.4 四脚小龟贴片 带接地脚 不锈钢双弹片 160GF

PJ. NO.: TS.43.73-12-3Z-01

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

APPD. JM_Zheng

CHKD. LYX


DR. TSP

PDWG.NO: 0415-1

A
B
C
D
E

A
B
C
D
E

1 2 3 4 5 6 7 8

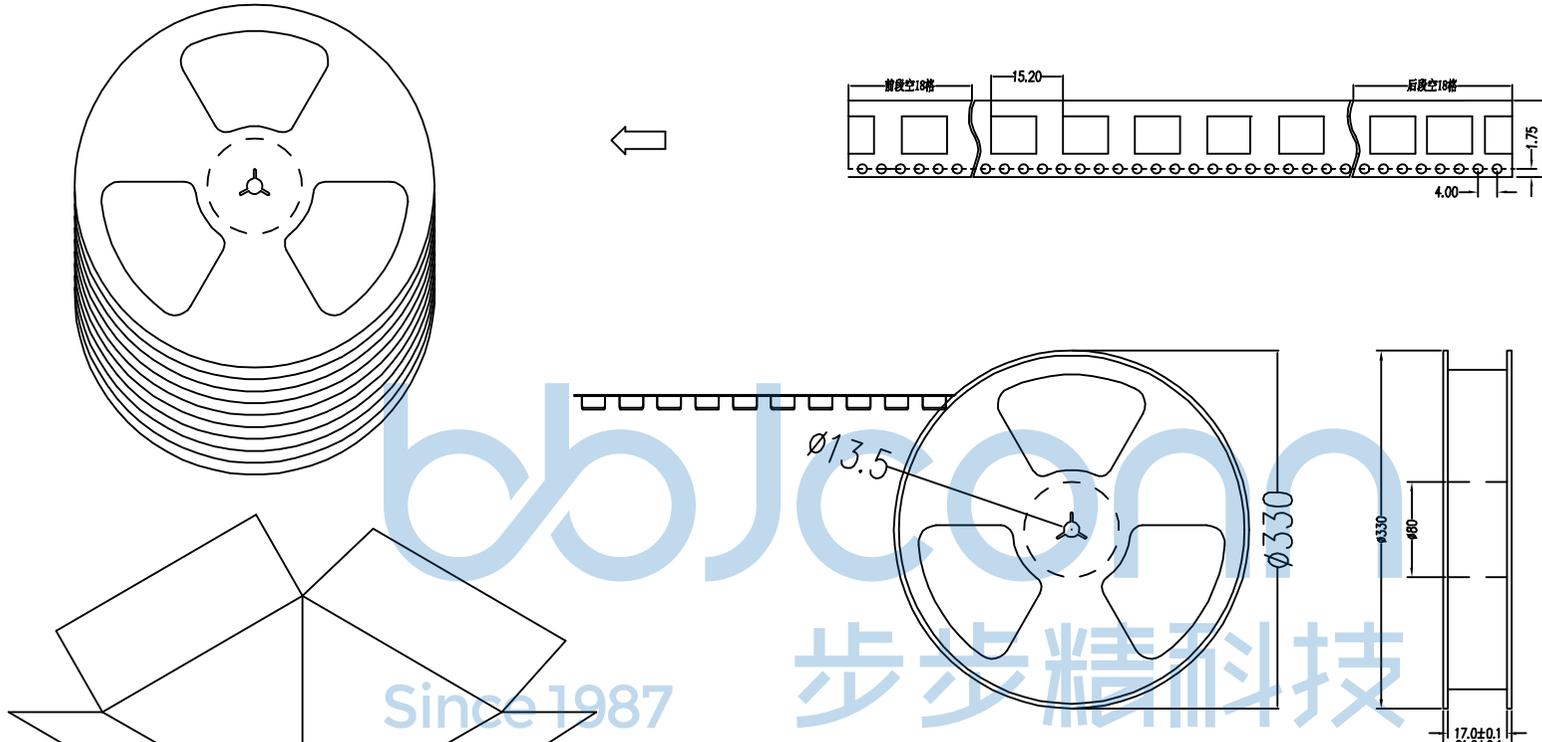

备注:

1. 包装数量: 4000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
 纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" XX': ±1"	
APPD.	JM_Zheng	NAME: 轻触开关 3x3.5x1.4 四脚小龟贴片 ø½Øμø½Å²»Đâ,ÖË«μÆ~ 160GF	
CHKD.	LYX	PJ. NO.: TS.43.73-12-3Z-01	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO: 0415-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: AO UNIT: mm PAGE: 2/2	