

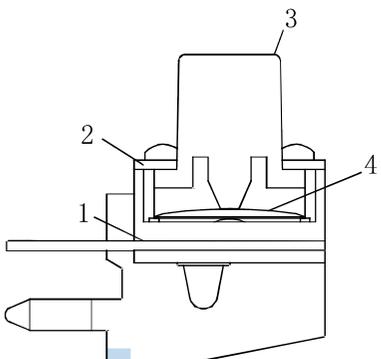
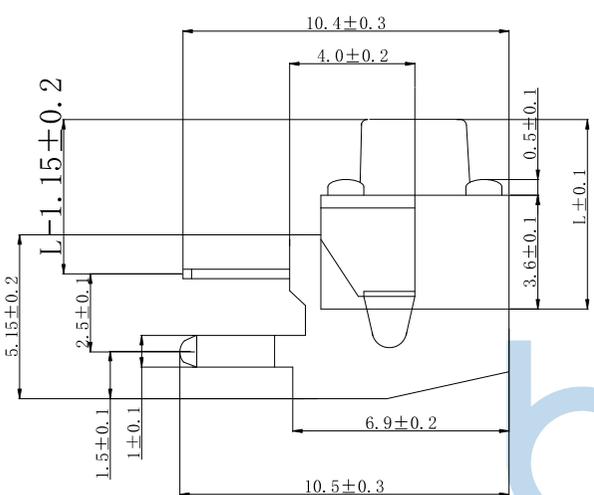


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

L=4.3~23

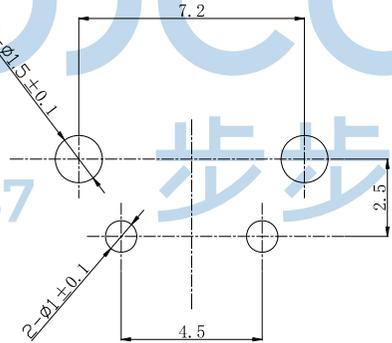


主要技术参数	1	操作行程	0.25±0.1mm
	2	额定电压、电流	DC12V/50mA
	3	接触电阻	30mΩ(max)
	4	绝缘电阻	100MΩ(min)
	5	耐压	250V AC/1min
	6	动作力	100/160/260±30gf
	7	使用寿命	50000次
	8	尺寸	未注公差均按 GB/T1804-2000

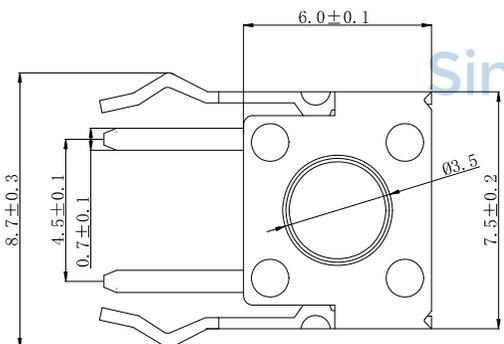

P. C. B. Land Pattern

序号	名称	数量	材料	镀涂/颜色
1	底座	1	0.3mm黄铜与PPA	黑色与镀银
2	支架	1	铁皮	镀铜锡
3	按钮	1	PPA	黑色
4	弹片	1	0.05mm 不锈钢	镀银/白色



Circuit Diagram



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0013-1

**深圳市步步精科技有限公司**

NAME: 轻触开关 6x6x8 支架 不锈钢弹片 260G

APPD. JM\_Zheng

CHKD. TSP

DR. LYX

PJ. NO.: TS.01.19-31-31-02


SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES


SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

PE袋规格: 260\*185

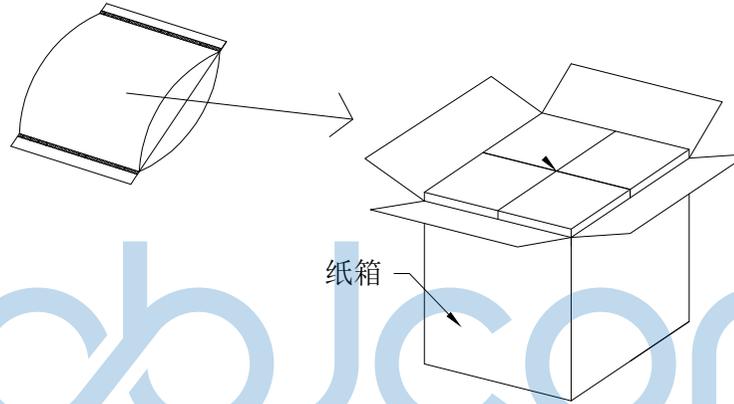

成品标签



1. 包装要求:

- 1.1 每PE袋包装 1000PCS;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		\$! c 2!•2i0 ° 9L€ œ (	
PDWG.NO: 0013-1		APPD. JM_Zheng CHKD. TSP DR. LYX	NAME: Çá¥¿; a1Ø 6x6x8 Ö§¼Ü ²»Đã, ÖμÆ- 260G PJ. NO.: TS.01.19-31-31-02 SIZE: A4   DRW NO.: FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 1/1