
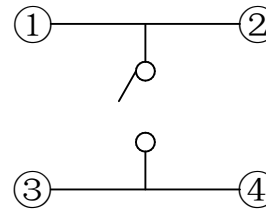



REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

性能	
额定规格	DC12V/50mA
接触电阻	≤100mΩ
绝缘电阻	≥100MΩ
耐电压	AC250V/min
动作力	160/260±50gf

A	H (高度)
∅3.0	2.5
∅3.0	2.7
∅3.0	3.1
∅3.0	3.4
∅2.9	3.7
∅2.9	4.3
∅2.9	5
∅2.9	5.5

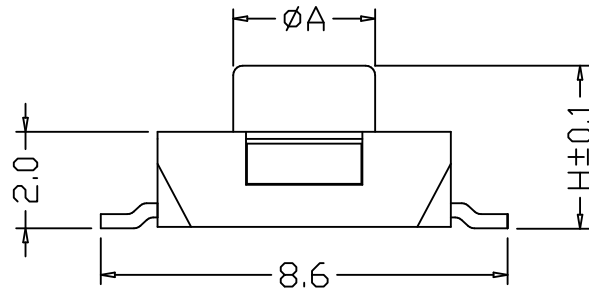

电路图

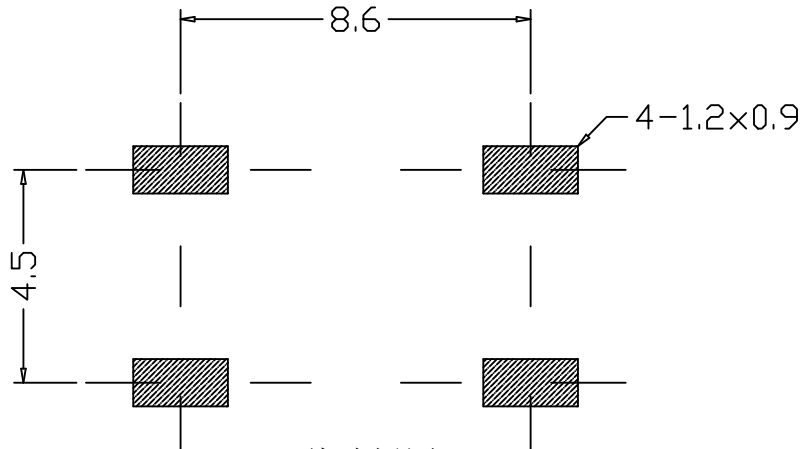

PCB线路板图

序号	产品名称	材料规格	表面处理 颜色	数量
1	按钮	PPA		1
2	盖板	不锈钢304	镀铜锡	1
3	簧片	不锈钢		1
4	底座	PPA		1
5	接线片	铜	镀银	1





THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG:NO: 0472-1

深圳市步步精科技有限公司

NAME: 6.2x6.2x3.1 E½xú EÁ½Áü/E- ²»Đä,Öµ/E- 160GF ²±ú ²»Đä,Ö,Ç

APPD.	JM_Zheng	PJ. NO.: TS.18.63-12-3Z-01
CHKD.	TSP	
DR.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A REV.: AO UNIT: mm PAGE: 1/1

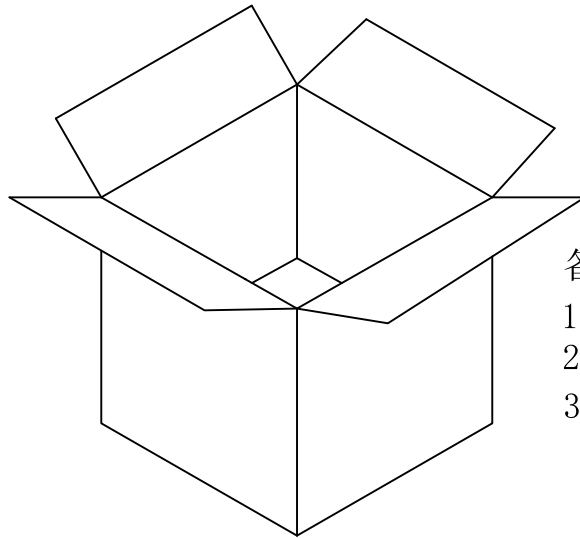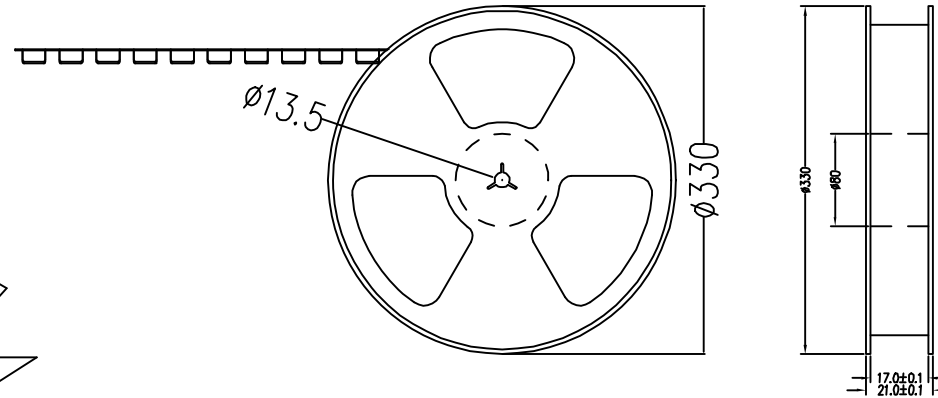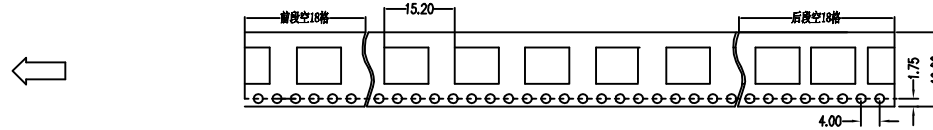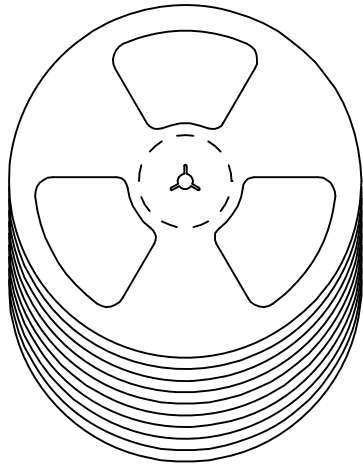

备注:

1. 包装数量: 1000/PCS
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 轻触开关 6.2x6.2x3.1 平座 四脚贴片 不锈钢弹片 160GF 红柄 不锈钢盖	
APPD.	JM_Zheng	PJ. NO.: TS.18.63-12-3Z-01 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	TSP	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0472-1	DR.	LYX	PAGE: 1/1	