
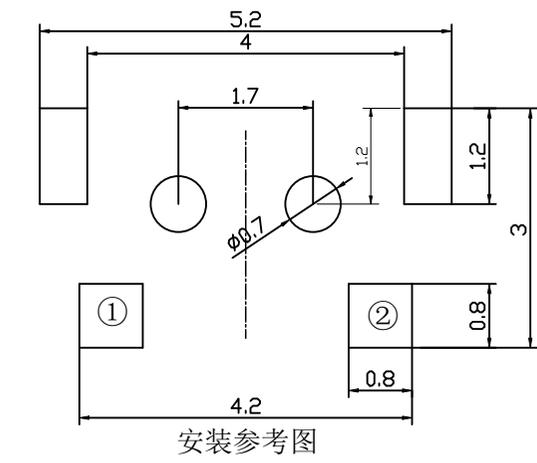
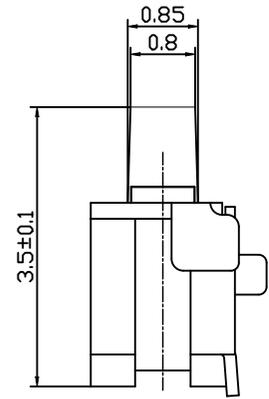
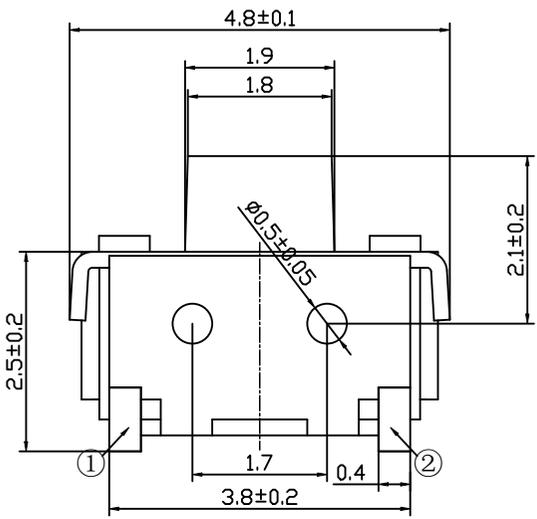
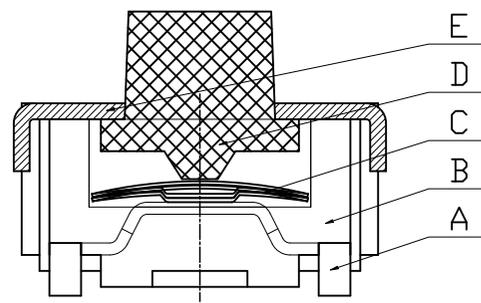


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

技术要求:

1. 零部件表面光洁无划伤, 水花, 变形, 影响外观及性能等缺陷。
2. 额定电流: 50mA. 12V DC, 绝缘电阻100MΩ min, 100V DC, 介电强度250V AC for 1min, 接触电阻200mΩ max。
3. 开关手感明显, 档位清晰可靠, 无卡滞现象, 消除外力后, 应能快速回位。

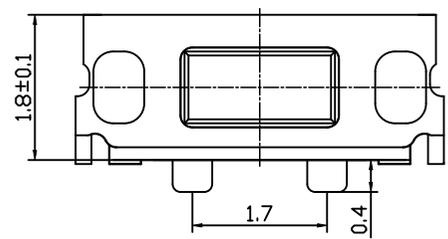

序号	名称	材料	数量	备注
E	盖板	磷铜0.2	1	镀银0.2 μ
D	按钮	LCP黑	1	
C	簧片	进口不锈钢覆银	2	外购
B	底座	LCP(白)	1	
A	卡件	磷铜0.15	1	镀银0.15 μ


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG:NO: 0278-1

深圳市步步精科技有限公司


.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: 轻触开关 2x4x3.5 侧按 0.5柱 不锈钢弹片 260gf (H1-01-B)
APPD. JM_Zheng	SIZE: A4	PJ. NO.: TS.05.58-41-38-01
CHKD. TSP	DRW NO.:	FINISH: SEE NOTES
DR. LYX	MAT'L.: SEE NOTES	SCALE: N/A
	REV.: A0	UNIT: mm
	PAGE: 1/2	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				


NOTE:
 1. QUANTITY/REEL: 3000 PCS
 P Q / \$: 3000 PCS
 QUANTITY/INNER CARTON: 3000 X 14 = 42000 PCS max
 P Q / E : 3000 X 14 = 42000 PCS max
 2% & X * \$ N, 外加保护带

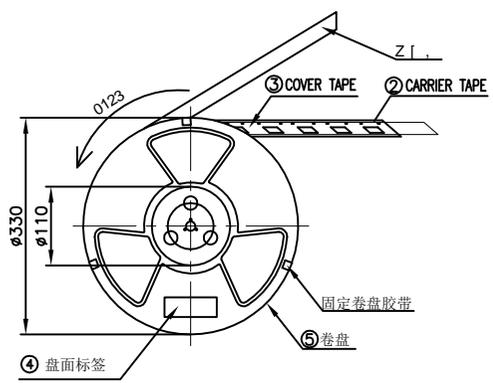


2: - . / 0 1
+ . * REEL



1: 产品平整
放入载带

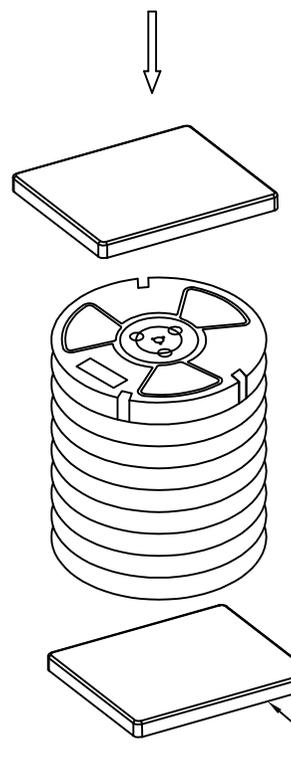

3: 10盘REEL整齐的重叠在一起,
上下各放一个天地板。

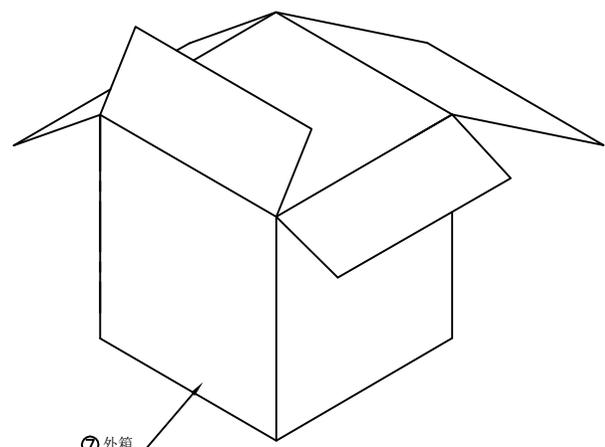

⑦ 外箱

4: 直接装入外箱。

ITRM	W	P	F	E	DO	PO	P2
DIM	24.00	12.00	1.50	1.75	1.50	4.00	2.00
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.15 -0.15

1	\ &			
2	CARRIER TAPE	PET	W=24mm T=0.30mm	
3	COVER TAPE	PET	W=21.3mm T=0.05mm	18.6
4	" #		59mm*50mm	10
5	\$]	Ø330mm*W28.5mm	10
7	D E	K=K	L345mm*W340mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: DR. LYX

NAME: Çá'¥ç'²1Ø 2x4x3.5 ²a° 0.5Öü ²»Dä,Öµ'Æ~ 260gf (H1-01-B)

APPD. JM_Zheng

CHKD. TSP

PJ. NO.: TS.05.58-41-38-01

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 2/2