

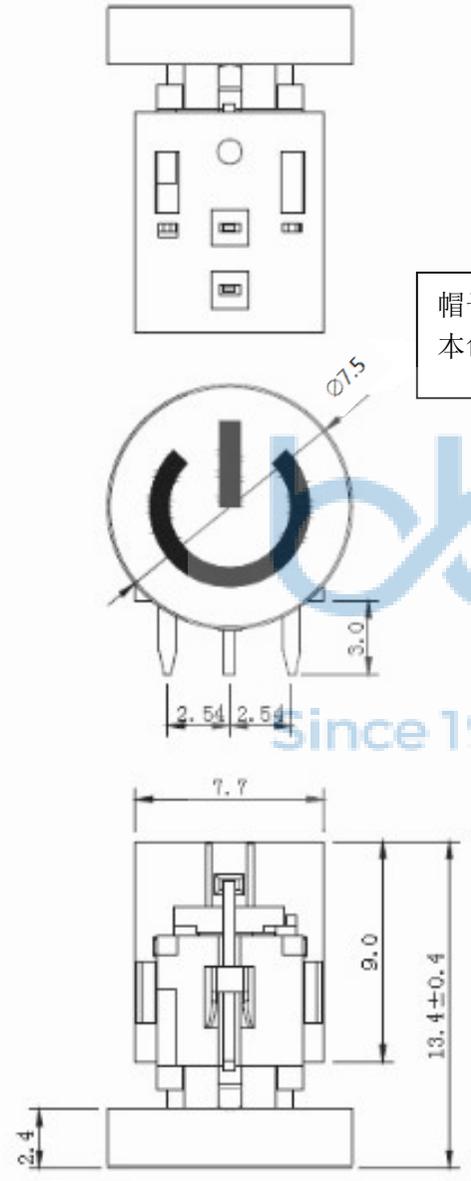


- NOTES:
1. RATING: 12VDC 50mA
 2. CONTACT RESISTANCE: 100mΩ Max
 3. INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
 4. DIELECTRIC STRENGTH: 250VAC (50/60Hz) FOR1MIN
 5. LIFE TEST: 100,000 CYCLES
 6. OPERATION FORCE: 250±80g
 7. TRAVEL: 0.25±0.15mm

帽子规格: 圆 7.5、圆 8.0、圆 10.0
本色或喷油雕刻





P. C. B LAYOUT

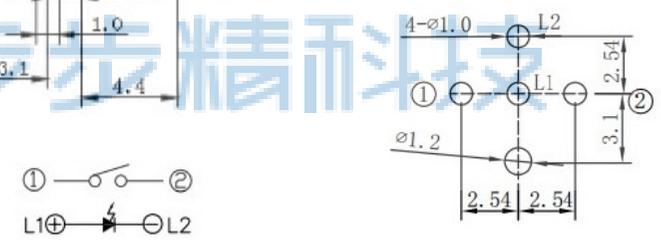

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .X''': ±1"		NAME: 轻触开关 RPB01-103RFL-W-01-BK 250G 白灯 圆7.5 黑油电源	
APPD.	JM_Zheng	 PJ. NO.: TS.43.73-DD-3Y-01 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG.NO:	0292-2	DR.	SGF	PAGE: 1/2	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格:***X*** (以实际出货为准)

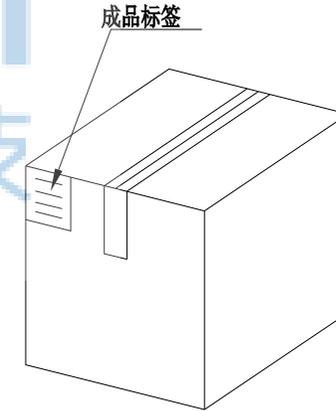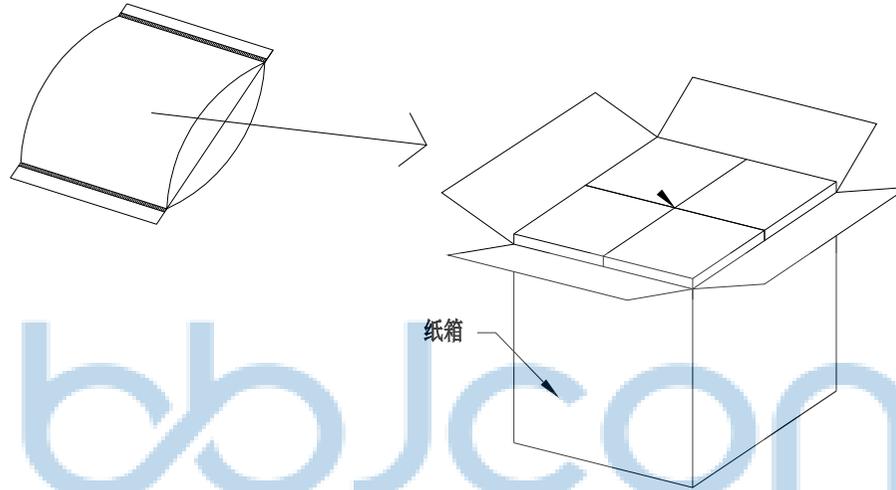

1. 包装要求:

- 1.1 每PE袋包装 1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3' NAME: 轻触开关 RPB01-103RFL-W-01-BK 250G 白灯 圆7.5 黑油电源 .XX: ±0.25 X'': ±2' .XXX: ±0.13 .XX': ±1'	
APPD.	JM_Zheng	PJ. NO.: TS.43.73-DD-3Y-01 SIZE: A4 DRW NO.:	
CHKD.	LYX		
PDWG.NO:	0292-2	DR.	SGF
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2