

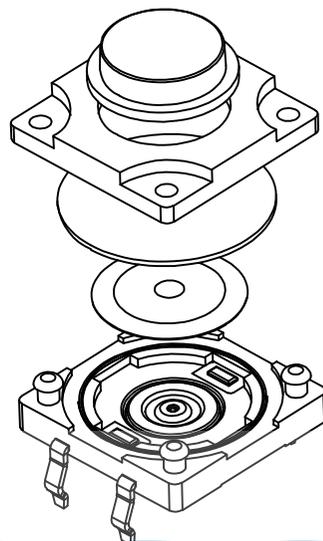
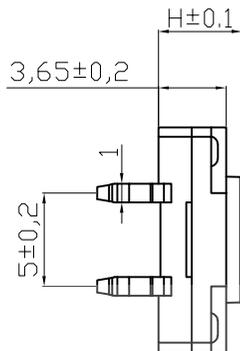


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF




- 主要技术规格:
1. 额定值: 50mA DC12V
 2. 接触电阻: $\leq 50m\Omega$
 3. 操作力: $160/260 \pm 30gf$
 4. 行程: $0.45 \pm 0.1mm$
 5. 绝缘电阻: $\geq 100M\Omega$
 6. 抗电强度: 250V 50HZ 1Min.
 7. 寿命: 100,000 Cycles
 8. 防水等级: IP67
 9. 防银迁移: 60V, 85°C, 90%RH/60H



PCB. 焊接图

H	
4.3	4.5
5.0	5.5
6.0	6.5
.....
13.0	13.5
14.0	15.0

序号	零件名称	材料规格	数量	备注
6	引脚、触点	黄铜	1	镀银
5	基座	PPA	1	耐温280°C (黑色)
4	簧片	不锈钢	1	覆银
3	防水垫	硅胶	1	耐温280°C (黑色)
2	盖板	PPA	1	耐温280°C (黑色)
1	按钮	PPA	1	耐温280°C (黑色)



电路图

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
PDWG.NO: 0459-1

深圳市步步精科技有限公司

NAME: 轻触开关 12x12x8 直插 不锈钢弹片 260GF 防水IP67 (G007)

APPD. JM_Zheng

CHKD. LYX

DR. SGF

PJ. NO.: TS.14.19-21-3Z-01




SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格:***X*** (以实际出货为准)

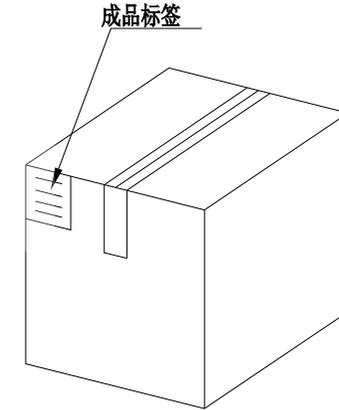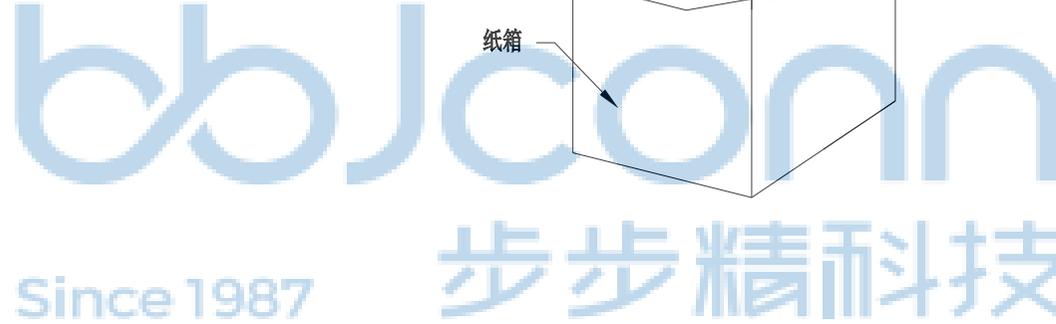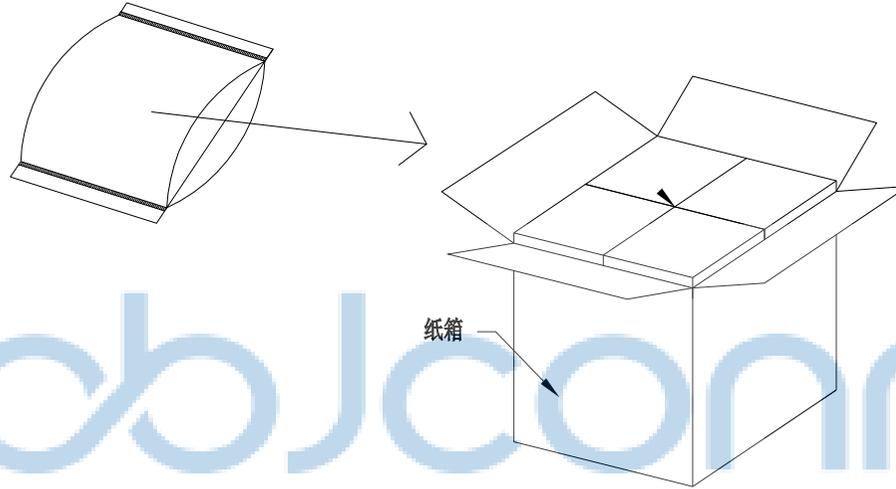

1. 包装要求:

- 1.1 每PE袋包装 1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3" NAME: .XX: ±0.25 .X": ±2" 轻触开关 12x12x8 直插 不锈钢弹片 260GF 防水IP67 (G007) .XXX: ±0.13 .XX": ±1"	
APPD.	JM_Zheng	PJ. NO.: TS.14.19-21-3Z-01 SIZE: A4 DRW NO.:	
CHKD.	LYX		
PDWG.NO:	0459-1	DR.	SGF
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2