




REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

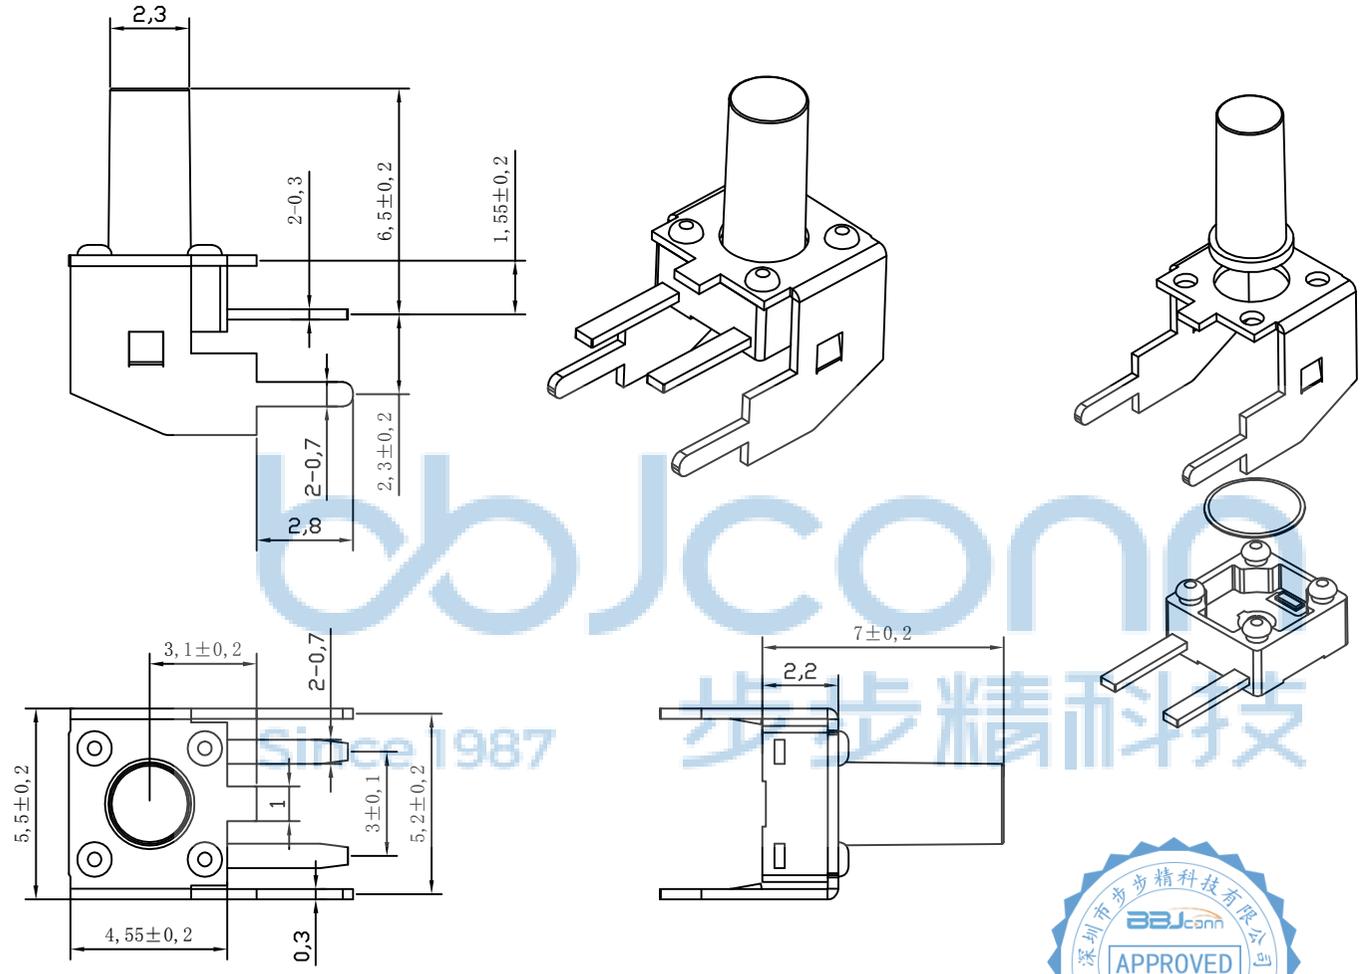

- 主要技术规格:**
1. 额定值: 50mA DC12V
 2. 接触电阻: ≤50mΩ
 3. 操作力: 160&250±40gf
 4. 行程: 0.20±0.1mm
 5. 绝缘电阻: ≥100MΩ
 6. 抗电强度: 250V 50HZ 1Min.
 7. 寿命: 100,000 Cycles

H	
2.8	3.0
3.2	3.8
4.0	7.0

序号	零件名称	材料规格	数量	备注
5	引脚、触点	黄铜	1	镀银
4	基座	PPA	1	耐温260℃ (黑色)
3	簧片	不锈钢	1	覆银
2	支架	冷轧钢	1	镀锡
1	按钮	PPA	1	耐温260℃ (黑色)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0459-1

APPD. JM_Zheng

CHKD. LYX

DR. SGF

深圳市步步精科技有限公司

NAME: 轻触开关 4.5X4.5X7 支架 直脚 160GF 不锈钢弹片 端子到支架脚距2.3 (特殊款) (C025)

PJ. NO.: TS.17.17-32-3Z-01




SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格:***X*** (以实际出货为准)

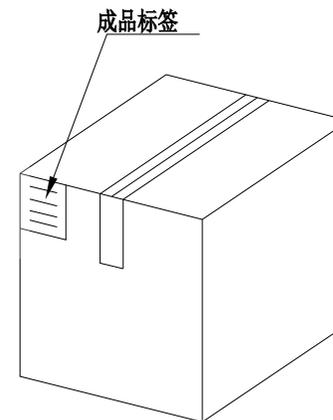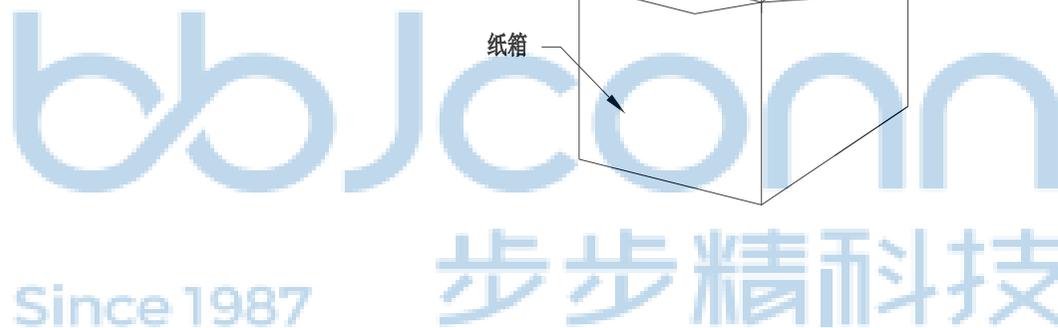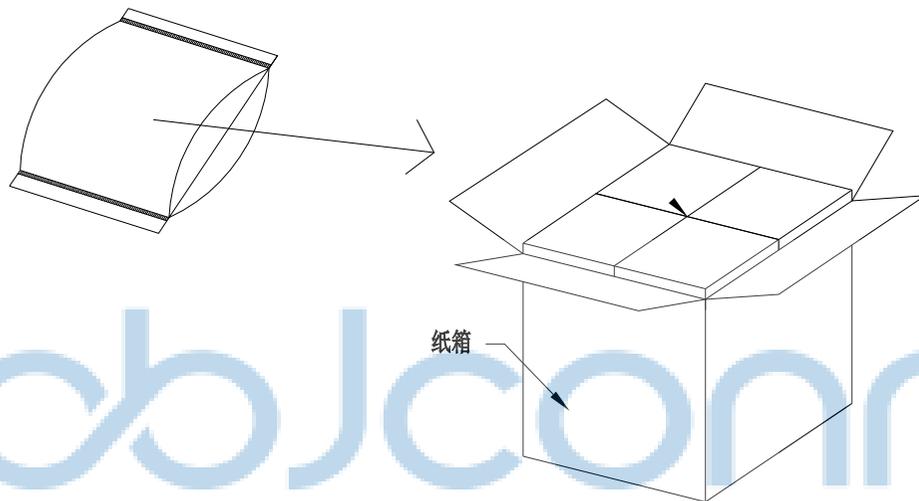

1. 包装要求:

- 1.1 每PE袋包装 500 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计10000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3" .XX: ±0.25 X'': ±2" .XXX: ±0.13 XX': ±1"		NAME: 轻触开关 4.5X4.5x7 支架 直脚 160GF 不锈钢弹片 端子到支架脚距2.3 (特殊款) (C025)	
APPD.	JM_Zheng	PJ. NO.: TS.17.17-32-3Z-01 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	PDWG.NO: 0459-1 DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	