

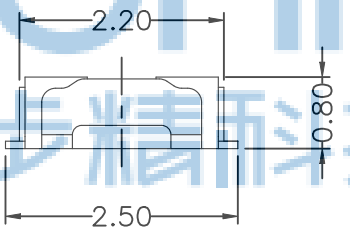
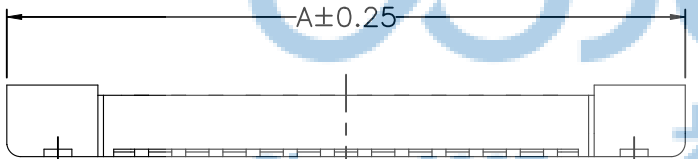


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS:
 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
 3.INSULATION RESISTANCE: 50MΩ MIN;
 4.CONTACT RESISTANCE: 100mΩ MAX;
 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.
 MATERIAL:
 1.INSULATOR: LCP UL 94V-0 BLACK;
 2.TERMINAL: COPPER ALLOY;
 3.METAL FITTINGS: COPPER ALLOY.
 PLATING:
 1.TERMINAL: GOLD PLATING,
 NICKEL 50u" MIN. OVER ALL;
 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

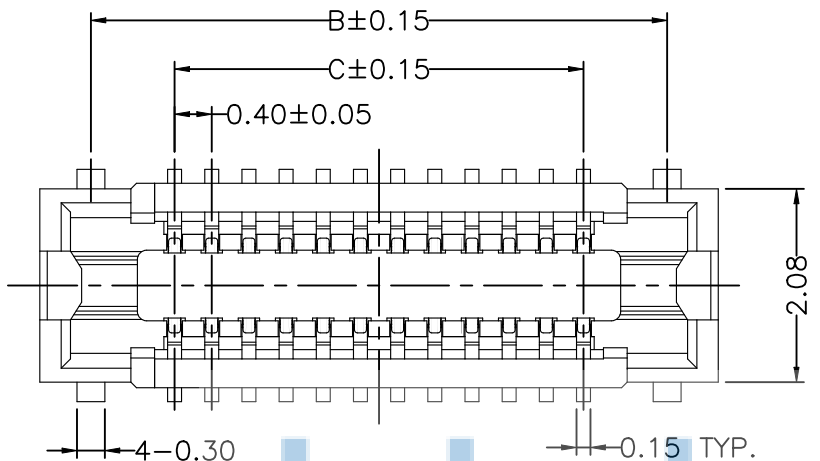

PIN NO.	A	B	C
10	4.50	3.40	1.60
12	4.90	3.80	2.00
16	5.70	4.60	2.80
20	6.50	5.40	3.60
24	7.30	6.20	4.40
30	8.50	7.40	5.60
34	9.30	8.20	6.40
40	10.50	9.40	7.60
50	12.50	11.40	9.60

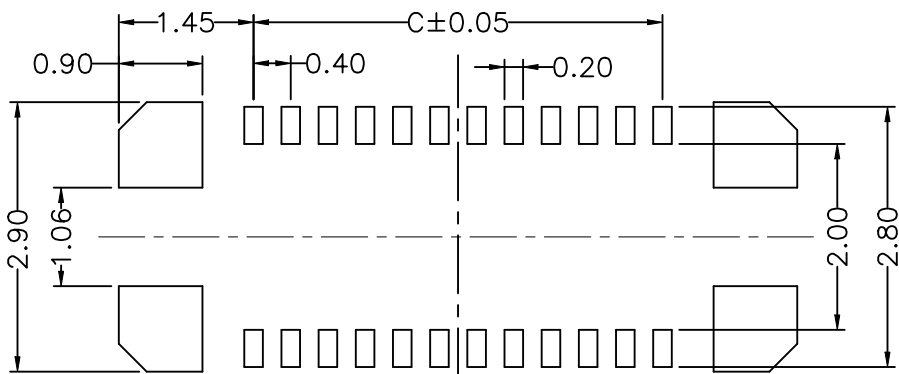

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0335-1





APPD. JM_Zheng
CHKD. LYX
DR. TSP

NAME: 板对板连接器 母座 0.40-2x5P 单槽BTB SOCKET SMT 台高H=0.80

PJ. NO.: WT.09.31-93-L001
SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

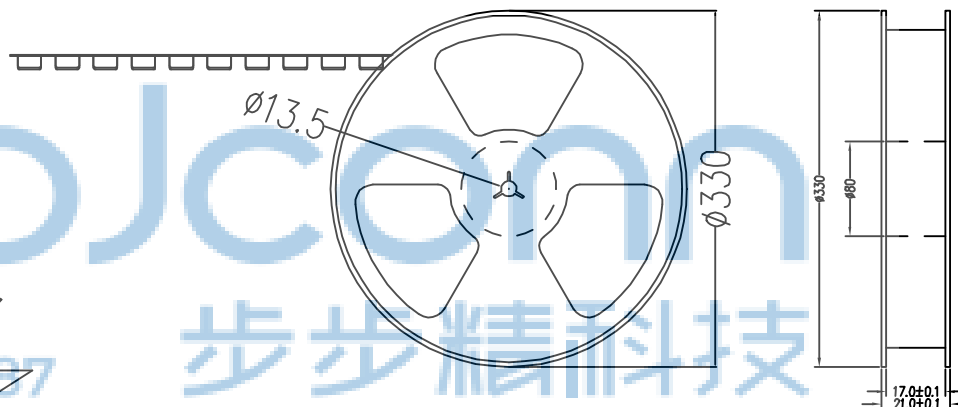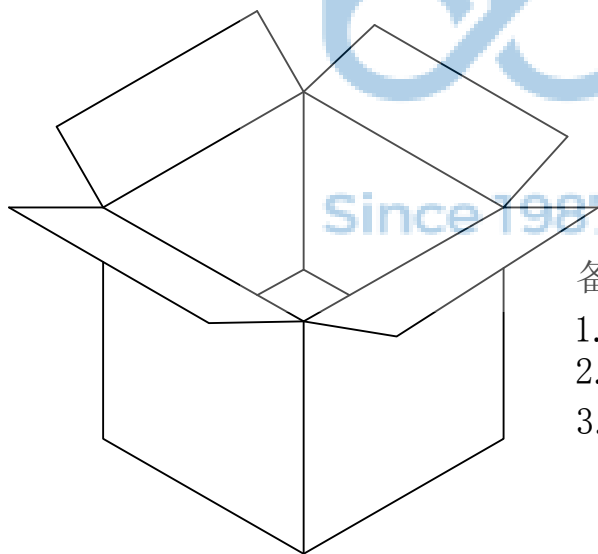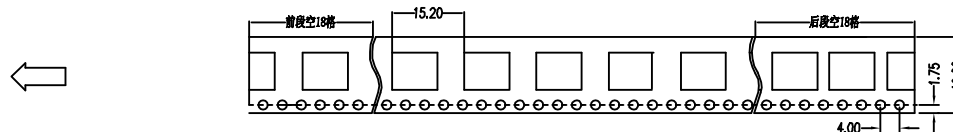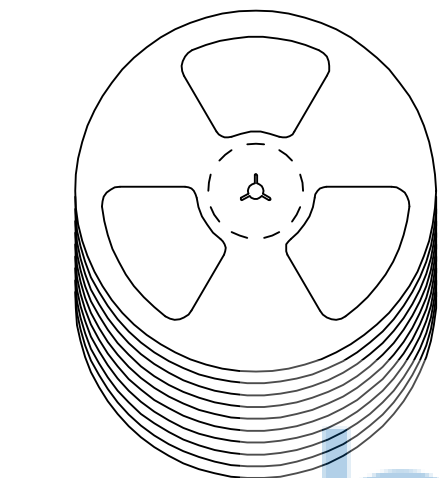

备注:

1. 包装数量: 4000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"	
APPD.	JM_Zheng	NAME: 板对板连接器 母座 0.40-2x5P 单槽BTB SOCKET SMT 合高H=0.80	
CHKD.	LYX	PJ. NO.: WT.09.31-93-L001	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO:	0335-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2