


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

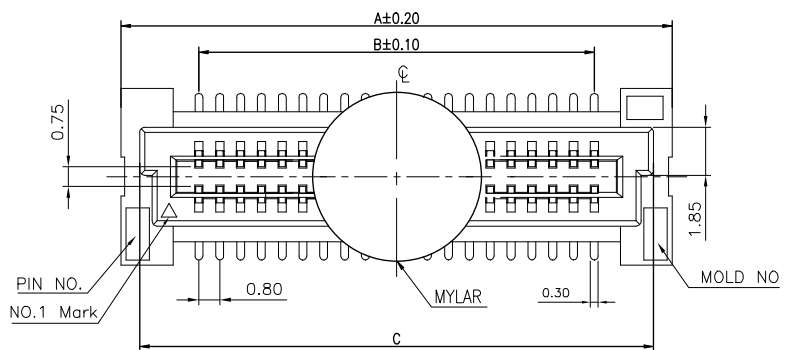





NOTES:

MATERIAL:

HOUSING: THERMO-PLASTIC. UL 94V-0 NATURE.
CONTACT: PHOSPHOR BRONZE.
CAP: BRASS.





SPECIFICATION:

CURRENT RATING: 0.5A 30V AC/DC.
CONTACT RESISTANCE: 50mΩ MAX.
INSULATION RESISTANCE: 500MΩ MIN AT 500V DC.
OPERATING TEMPERATURE RANGE: -20°C TO +85°C.

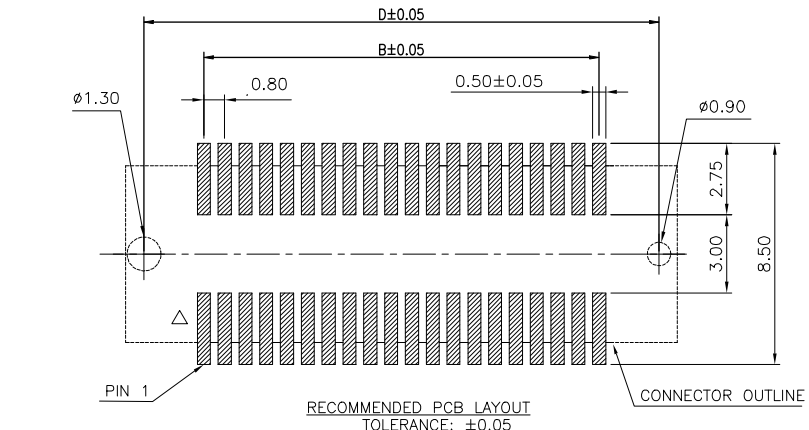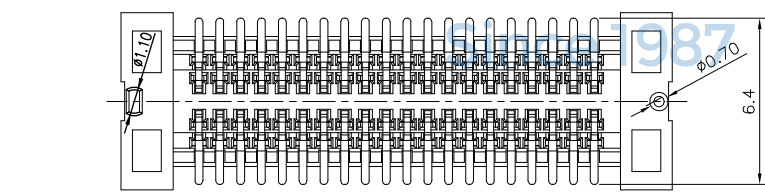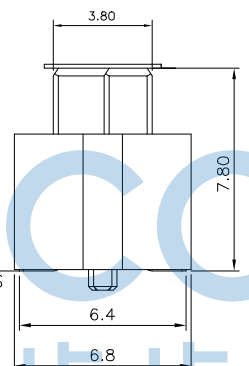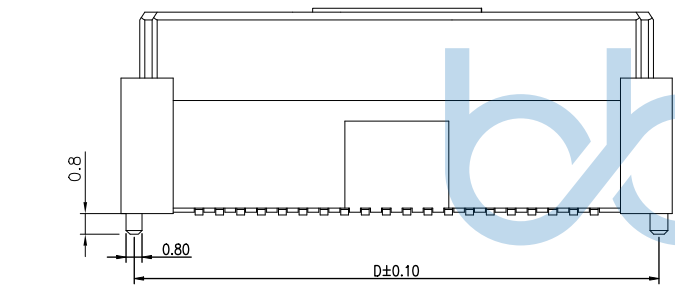

NO.of contacts	Dimensions			
	A	B	C	D
20	13.20	7.20	11.80	12.20
30	17.20	8.00	15.80	16.20
40	21.20	8.80	19.80	20.20
50	25.20	9.60	23.80	24.20
60	29.20	10.40	27.80	28.20
80	37.20	11.20	35.80	36.20
100	45.20	12.00	43.80	44.20
120	53.20	12.80	51.80	52.20
140	61.20	13.60	59.80	60.20
160	69.20	14.40	67.80	68.20
180	77.20	15.20	75.80	76.20
200	85.20	16.00	83.80	84.20

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X': ±3' .XX: ±0.25 X'': ±2' .XXX: ±0.13 XX': ±1'	
APPD.	JM_Zheng	NAME: 板对板连接器 母座 0.80-2x10P BTB SOCKET SMT 带柱 合高H=9.0	
CHKD.	LYX	PJ. NO.: 123-231-200001-W1G	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO:	0335-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/2

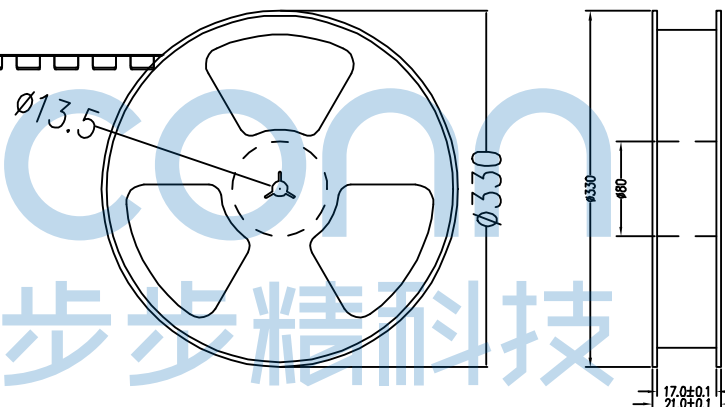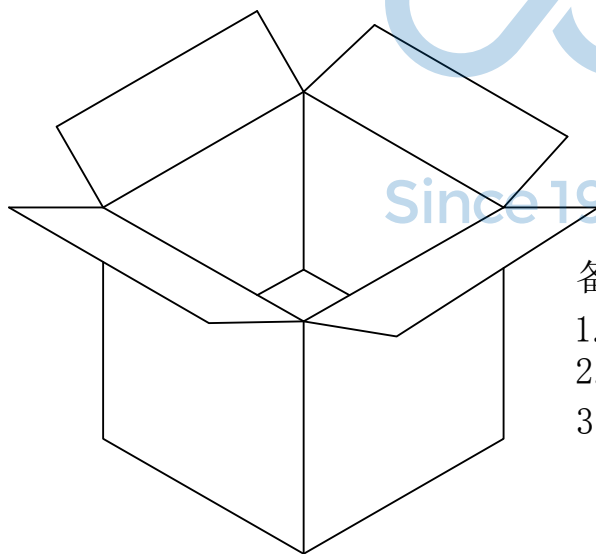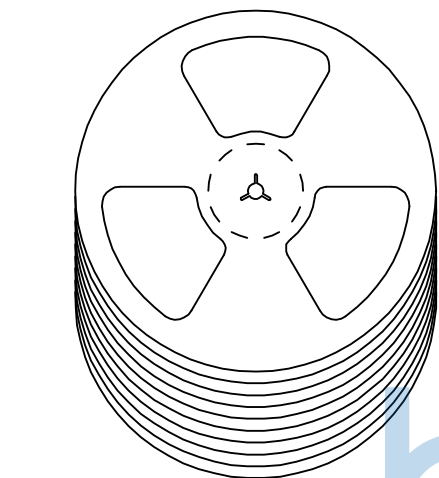

备注:

1. 包装数量: 500/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 板对板连接器 母座 0.80-2x10P BTB SOCKET SMT 带柱 合高H=9.0	
APPD.	JM_Zheng	PJ. NO.: 123-231-200001-W1G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES MAT'L.: SEE NOTES		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
PDWG.NO:	0335-1	DR.	TSP		