


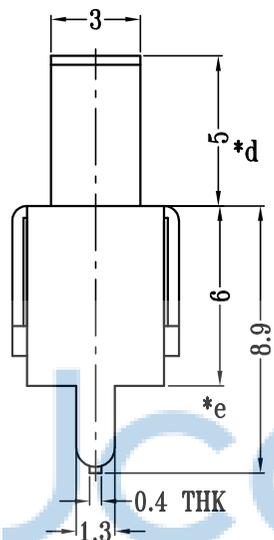


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO		Initial release	/	SGF


额定值 : 0.3A 50VDC
 接触电阻 : 100m max
 绝缘电阻 : 100M MIN
 耐电压 : AC 500V
 寿命 : 10000
 工作温度 : -25 +85

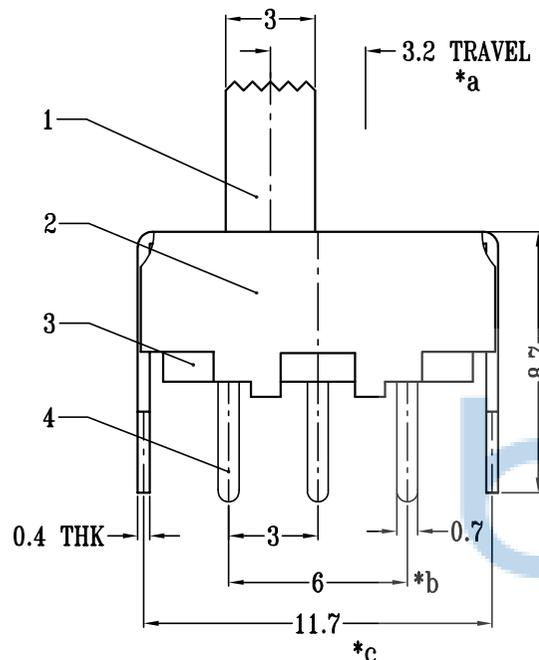

SCHEMATIC (NON-SHORTING)

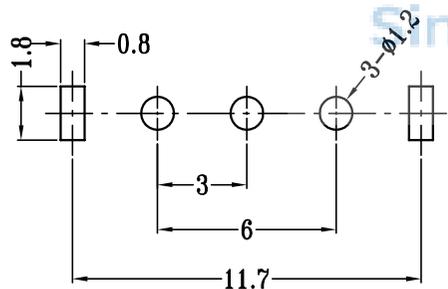

P.C.B LAYOUT
BOTTOM VIEW

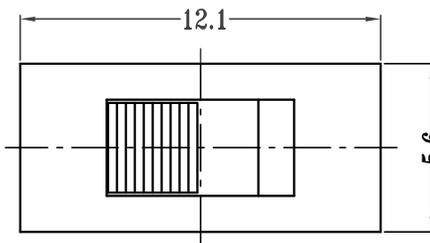

注：“*”表示关键尺寸(5个)

NO.	PARTS	MATERIALS	Q'TY	FINISH
8				
7				
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS STRIP	1	Ag PLATED
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	CASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	BLACK

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

NAME: 拨动开关 SS12F46G5 高温金码 三脚直插

APPD. JM_Zheng

CHKD. LYX

FINISH: SEE NOTES MAT'L.: SEE NOTES




DR. SGF

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

PDWG.NO: 0101-1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

PE袋规格:***X*** (以实际出货为准)

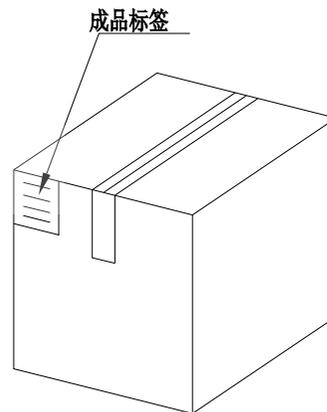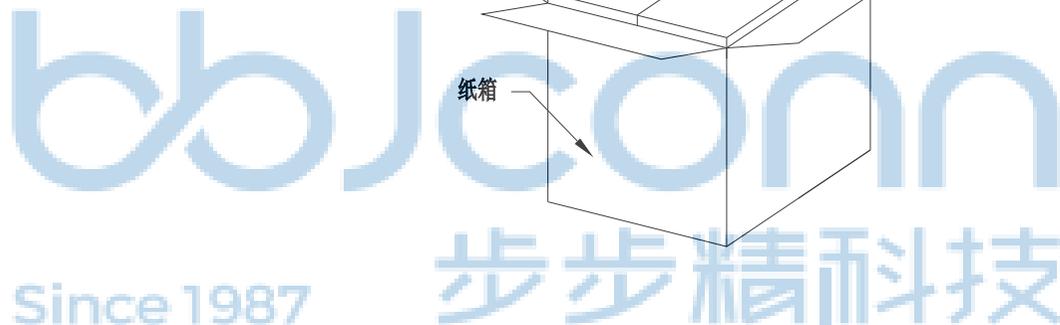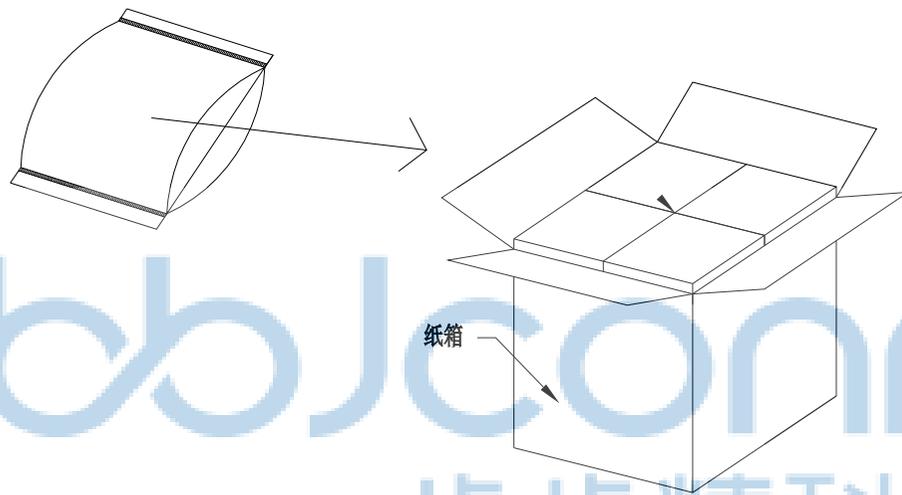

1. 包装要求:

- 1.1 每PE袋包装 1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' .X': ±2' .XX': ±1' APPD. JM_Zheng CHKD. LYX DR. SGF		NAME: 深圳市步步精科技有限公司 拨动开关 SS12F46G5 高温金码 三脚直插 PJ. NO.: SS.02.01-06-1003 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
--	--	--	--	---	--