
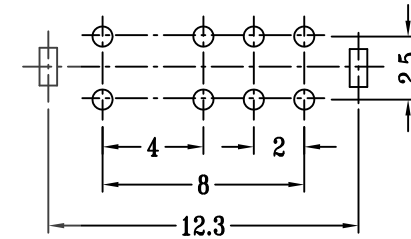
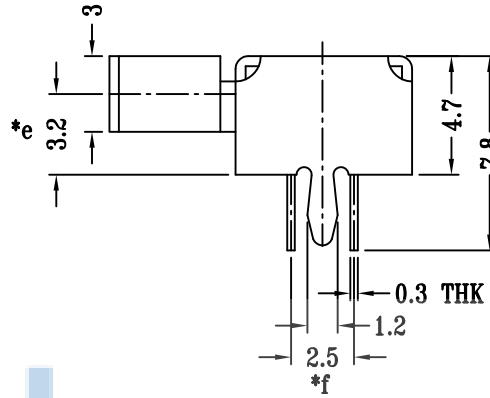




| REV. | ECN NO | CONTENT         | DATE | ENGINEER |
|------|--------|-----------------|------|----------|
| A0   |        | Initial release | /    | SGF      |

额定值：0.3A 50VDC  
接触电阻：100mΩ max  
绝缘电阻：100MΩ MIN  
耐电压：AC 500V  
寿命：10000  
工作温度：-25 +85

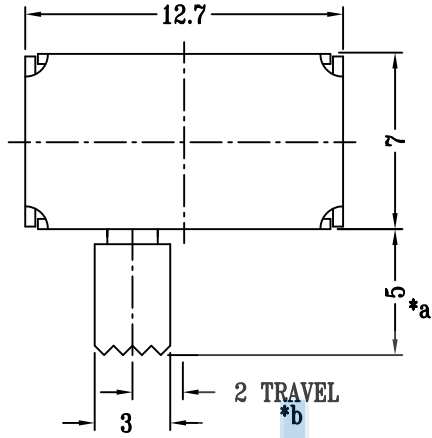

P.C.B LAYOUT  
BOTTOM VIEW

注：“\*”表示关键尺寸(6个)

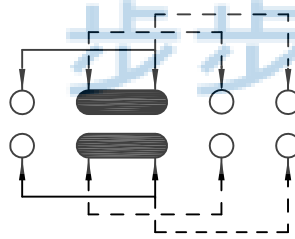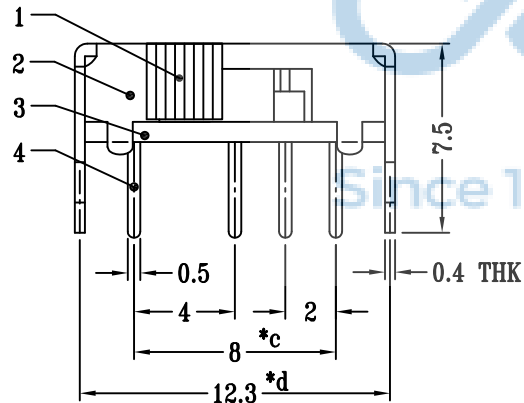

SCHEMATIC (SHORTING)


|     |              |                |       |           |
|-----|--------------|----------------|-------|-----------|
| 8   |              |                |       |           |
| 7   |              |                |       |           |
| 6   | SPRING PLATE | PBS STRIP      | 1     | NATURAL   |
| 5   | CONTACT CLIP | PBS STRIP      | 2     | Ag CLAD   |
| 4   | TERMINAL     | BRASS STRIP    | 8     | Ag PLATED |
| 3   | BASE         | PHENOLIC RESIN | 1     | NATURAL   |
| 2   | FRAME        | STEEL STRIP    | 1     | Ni PLATED |
| 1   | KNOB         | PA66           | 1     | BLACK     |
| NO. | PARTS        | MATERIALS      | Q' TY | FINISH    |



|                                                                                                                                                                              |          |                                                                   |     |                                             |                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------|-----|---------------------------------------------|-----------------------------|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |          | .X: ±0.38 X*: ±3*<br>.XX: ±0.25 .X*: ±2*<br>.XXX: ±0.13 .XX*: ±1* |     | NAME:<br>拨动开关 SK23D07G5-3X3柄 侧拨 八脚插 三挡 高温金码 |                             |
| APPD.                                                                                                                                                                        | JM_Zheng | PJ. NO.: SS.01.01-06-1004                                         |     | SIZE: A4 DRW NO.:                           |                             |
| CHKD.                                                                                                                                                                        | LYX      | FINISH: SEE NOTES                                                 |     | MAT'L.: SEE NOTES                           |                             |
| PDWG.NO:                                                                                                                                                                     | 0101-1   | DR.                                                               | SGF | SCALE: N/A                                  | REV.: A0 UNIT: mm PAGE: 1/2 |



深圳市步步精科技有限公司

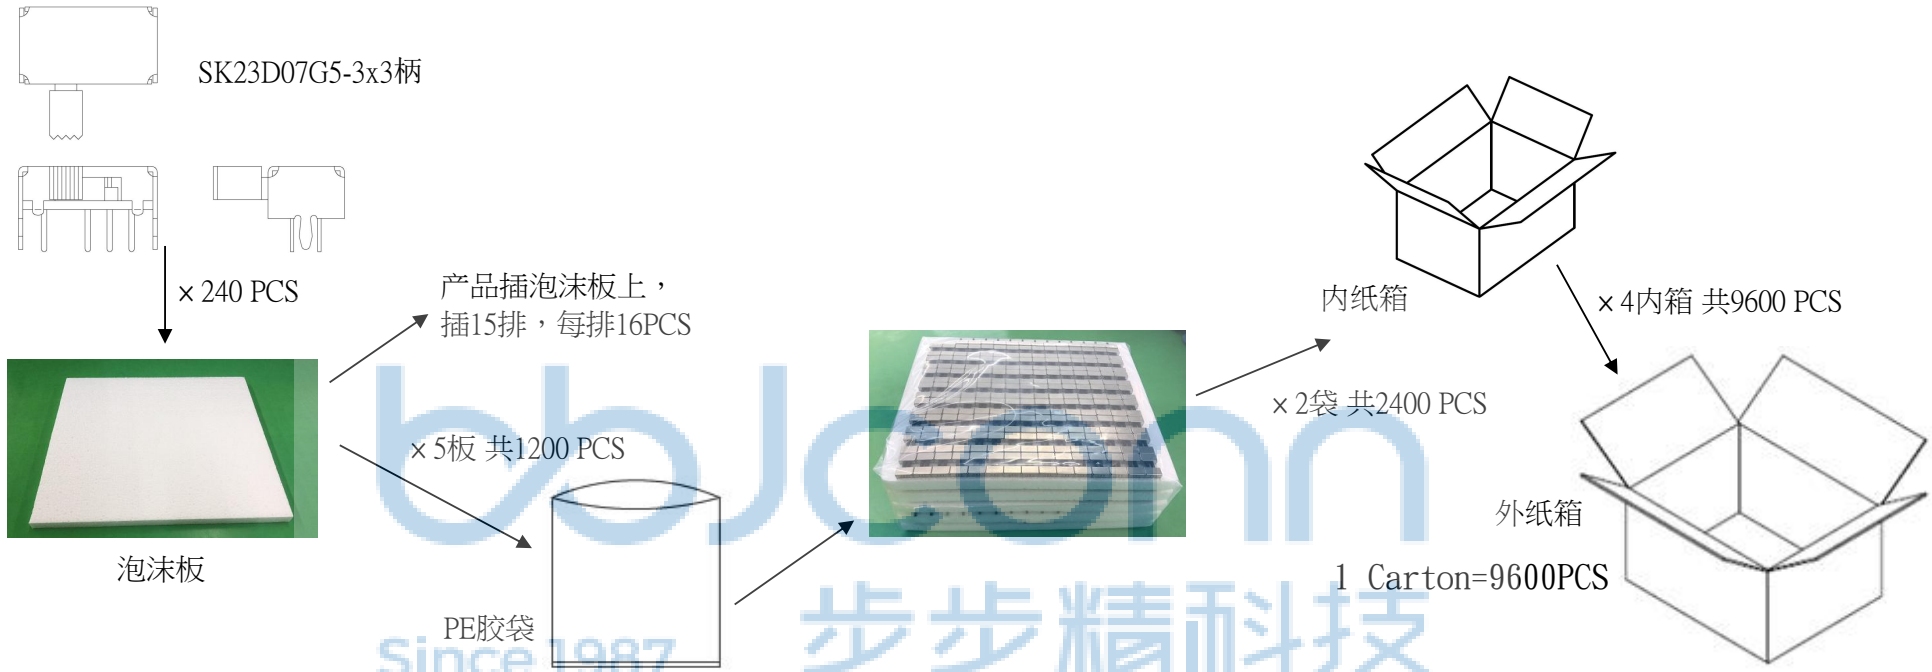

## 二、包装尺寸:(L\*W\*H)

### 1.泡沫板:

220mmX180mmX12mm

### 2.PE胶袋:

300mmX350mmX0.1mm

### 3.内纸箱:

365mmX225mmX110mm

### 4.外纸箱:

470mmX375mmX255mm

## 三、使用设备[Packing Facility]

### 1.封箱机[Carton Tighted Machine]

## 四、包装明细[Packing Details]

1. 将240PCS产品插入一块泡沫板上;
2. 将5板 (共1200PCS) 装入一个PE胶袋内;
3. 将2袋 (共2400PCS) 放入1个内箱中;
4. 将4内箱 (共9600PCS) 放入1个外箱中.



|                                                                                                                                                                              |  |                                  |  |                                             |  |  |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------|--|---------------------------------------------|--|--|--|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION. |  |                                  |  | 深圳市步步精科技有限公司                                |  |  |  |
| .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                                                                                                       |  | X": ±3"<br>.X": ±2"<br>.XX": ±1" |  | NAME:<br>拨动开关 SK23D07G5-3X3柄 侧拨 八脚插 三挡 高温金码 |  |  |  |
| APPD. JM_Zheng                                                                                                                                                               |  | CHKD. LYX                        |  | PJ. NO.: SS.01.01-06-1004                   |  |  |  |
| DR. SGF                                                                                                                                                                      |  |                                  |  | SIZE: A4 DRW NO.:                           |  |  |  |
| PDWG.NO: 0101-1                                                                                                                                                              |  |                                  |  | FINISH: SEE NOTES MAT'L.: SEE NOTES         |  |  |  |
|                                                                                                                                                                              |  |                                  |  | SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2      |  |  |  |