


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP




额定值 : 0.3A 50VDC
接触电阻: 100mΩ max
绝缘电阻: 100MΩ MIN
耐电压: AC 500V
寿命: 10000
工作温度: -25 +85

注: “*” 表示关键尺寸 (5个)

SCHEMATIC (NON-SHORTING)

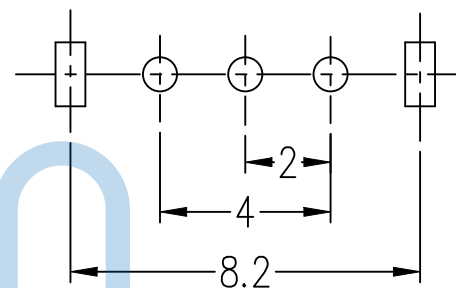

P.C.B LAYOUT
BOTTOM VIEW

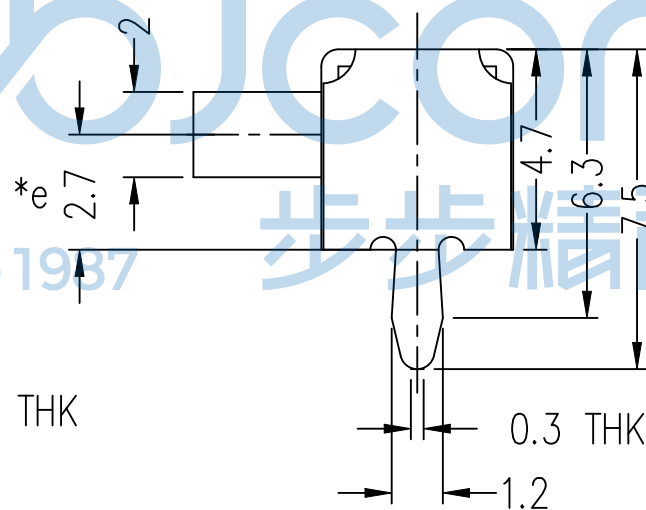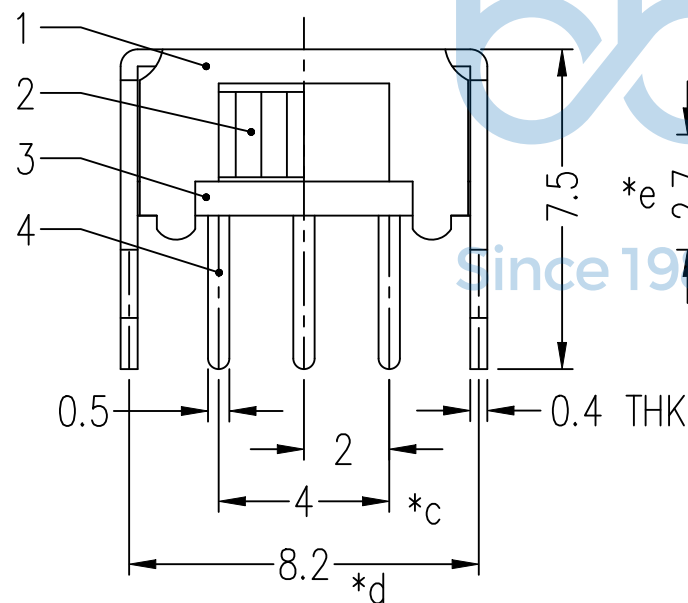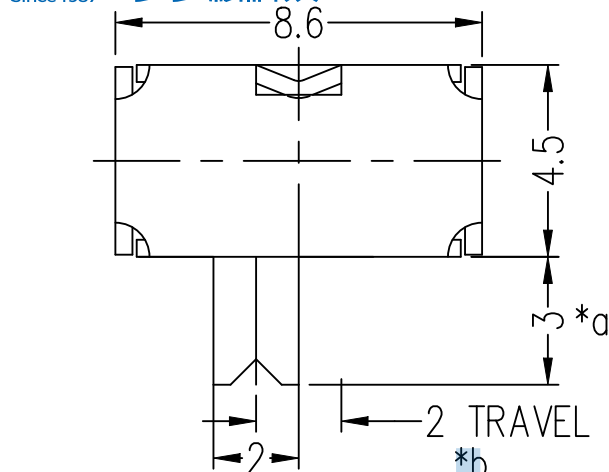


5	CONTACT CLIP	PBS STRIP	1	Ag CLAD
4	TERMINAL	BRASS STRIP	3	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	KNOB	PA66	1	BLACK
1	FRAME	STEEL STRIP	1	Ni PLATED
NO.	PARTS	MATERIALS	Q'TY	FINISH


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		NAME: 拨动开关 SK12D07V63 高温金码 侧拨 三脚插 间距2.0 袋装			
APPD.	JM_Zheng	PJ. NO.: SS.01.02-04-1001		SIZE: A4 DRW NO.:			
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES			
PDWG.NO:	0101-1	DR.	TSP	SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格: 260*185

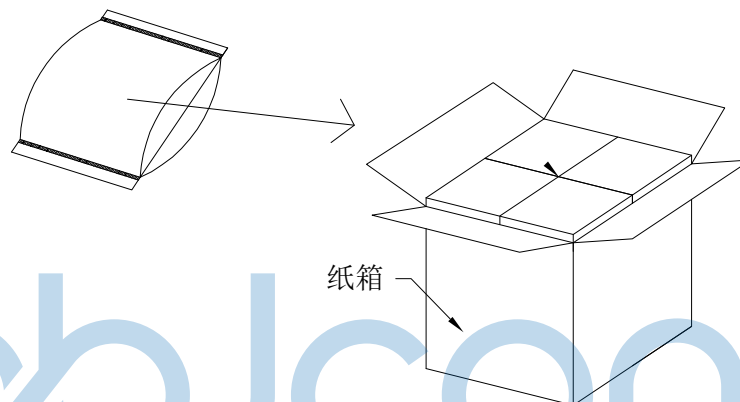

成品标签



1. 包装要求:

- 1.1 每个PE袋包装1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000pcs;
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0101-1	DR. TSP	NAME: 拨动开关 SK12D07V63 高温金码 侧拨 三脚插 间距2.0 袋装	
APPD. JM_Zheng	CHKD. LYX	PJ. NO.: SS.01.02-04-1001	
		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2