



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

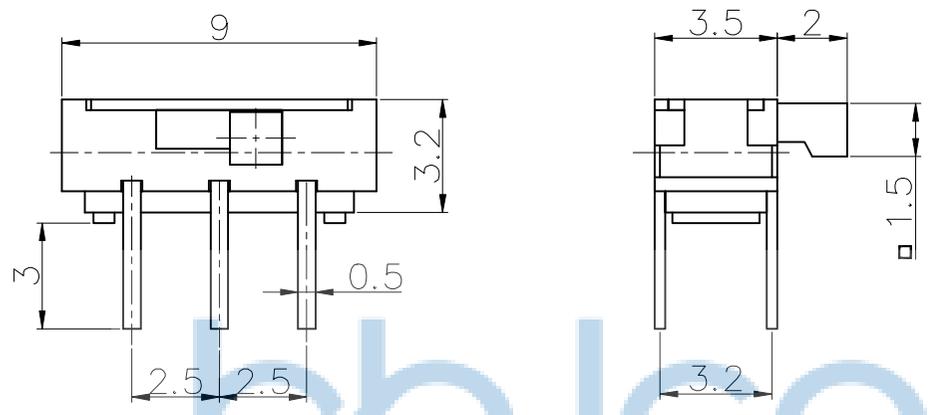


拨动开关性能规格 (SLIDE SWITCH SPEC):

- 电气性能 (ELECTRICAL PROPERTIES):**
 - 接触电阻 (Rating): 50mΩ max.
 - 耐电压 (Contact resistance): 250V AC, 漏电流 1mA. (250V AC for 1minute).
 - 绝缘电阻 (Insulation resistance): 100MΩ min, 250V DC.
- 机械性能 (MECHANICAL PROPERTIES):**
 - 寿命 (Operating force): 10000 cycles min.
- 环境性能 (ENVIRONMENT PROPERTIES):**
 - 适用温度 (Operating force): -25°C ~ +70°C.
 - 湿度范围 (Humidity range): 85% max.
 - 产品符合 RoSH 环保要求 (2002/95/EC (RoHS) COMPLIANT).

CIRCUIT DIAGRAM



PCB HOLE LAYOUT

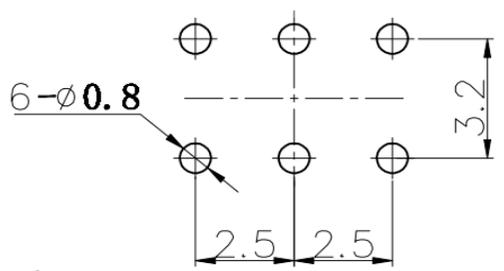

技术要求:


- 各零件安装正确, 不得有错装、漏装等不良现象.
- 塑胶不得有裂纹, 飞边, 压伤等不良现象.
- 端子不得变形, 压伤, 镀层不得有发黄脱落等现象.
- 开关通断转换正常.




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 NAME: 拨动开关-MSK-22D18 六脚卧式2H 耐高温	
PDWG.NO: 0126-1	DR. TSP	APPD. JM_Zheng	PJ. NO.: SS.03.01-02-3008 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格:***X*** (以实际出货为准)

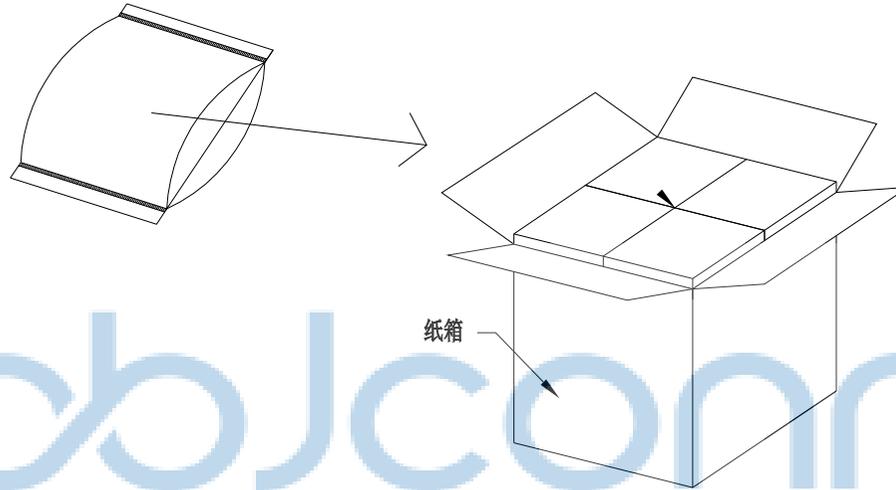

1. 包装要求:
- 1.1 每PE袋包装 1000pcs;
 - 1.2 纸箱外贴上标签

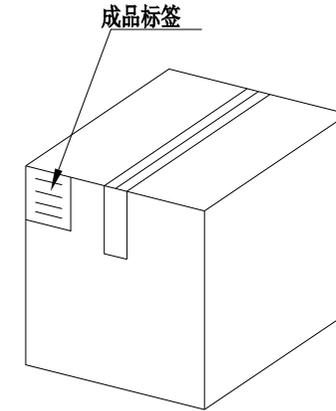

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
PDWG.NO: 0126-1	DR. TSP	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3" .X*: ±2" .XX*: ±1"
APPD. JM_Zheng		NAME: 拨动开关-MSK-22D18 六脚卧式2H 耐高温	
CHKD. LYX		PJ. NO.: SS.03.01-02-3008	
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A0	UNIT: mm
PAGE: 2/2			