
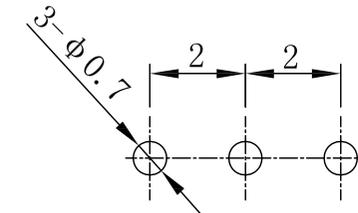
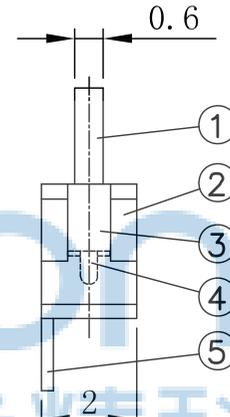




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

拨动开关性能规格 (SLIDE SWITCH SPEC):

- 电气性能 (ELECTRICAL PROPERTIES):**
 - 接触电阻 (Rating):** 50mΩ max.
 - 耐电压 (Contact resistance):** 250V AC, **漏电流** 1mA. (250V AC for 1minute).
 - 绝缘电阻 (Insulation resistance):** 100MΩmin, 250V DC.
- 机械性能 (MECHANICAL PROPERTIES):**
 - 寿命 (Operating force):** 10000cycles min.
- 环境性能 (ENVIRONMENT PROPERTIES):**
 - 适用温度 (Operating force):** -25°C ~ +70°C.
 - 湿度范围 (Humidity range):** 85%max.

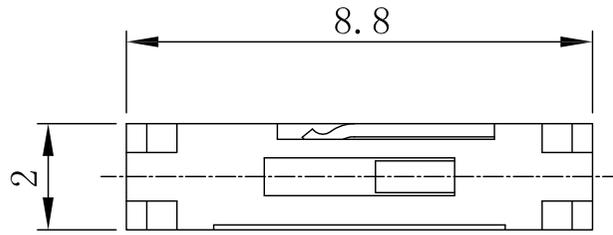

P.C.B LAYOUT DIMENSION
TOP VIEW

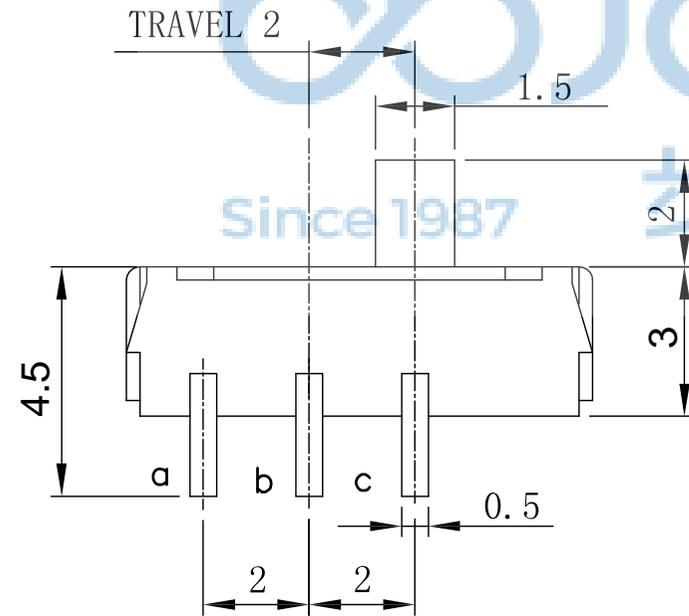

CIRCUIT

9				
8				
7				
6				
5	TERMINAL a,b&c	C2680	3	Ag
4	CONTACT	C5210	1	Ag
3	COVER	SUS	1	NATURAL
2	BOTTOM	PA46	1	BLACK
1	STEM	PA46	1	BLACK
NO.	PARTS	MATERIAL	QTY.	FINISHING



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0126-1

DR. TSP

APPD. JM_Zheng

CHKD. LYX

深圳市步步精科技有限公司

NAME: 拨动开关偏三立式H2 MSK-12D18H 黑柄 G=2.0

PJ. NO.: SS.03.03-02-B002




SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

PE袋规格:***X*** (以实际出货为准)

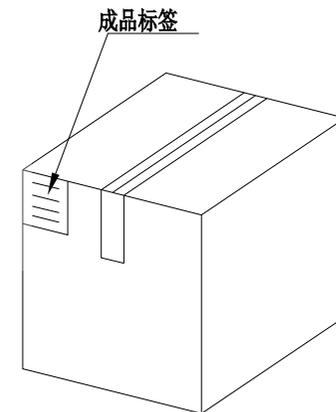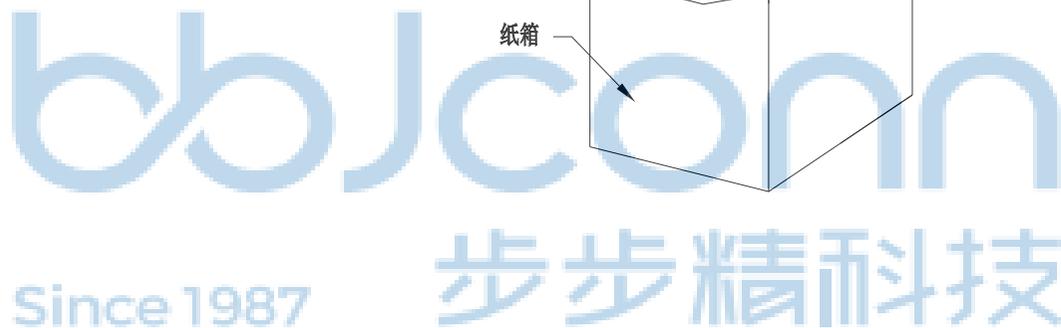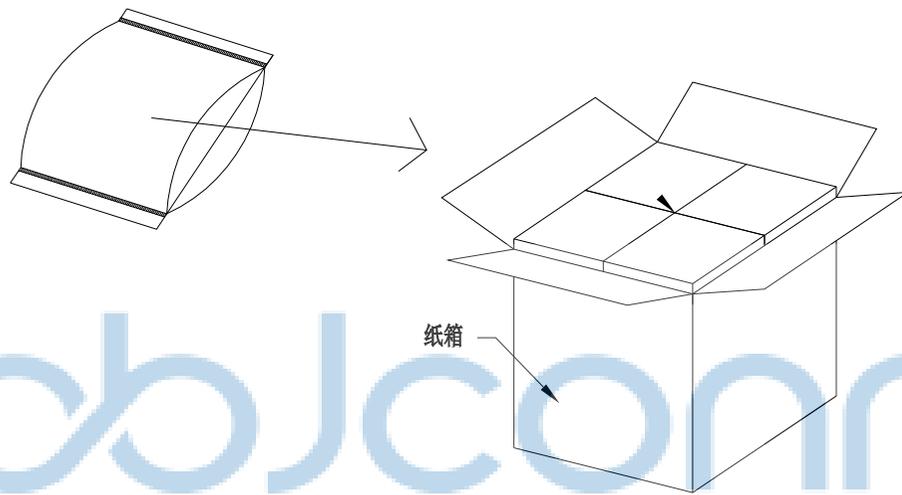

1. 包装要求:

- 1.1 每PE袋包装 1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 X*: ±3* .XX: ±0.25 .X*: ±2* .XXX: ±0.13 .XX*: ±1*	
APPD.	JM_Zheng	NAME: 拨动开关偏三立式H2 MSK-12D18H 黑柄 G=2.0	
CHKD.	LYX	PJ. NO.: SS.03.03-02-B002	
DR.	TSP	SIZE: A4 DRW NO.:	
PDWG.NO: 0126-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	