

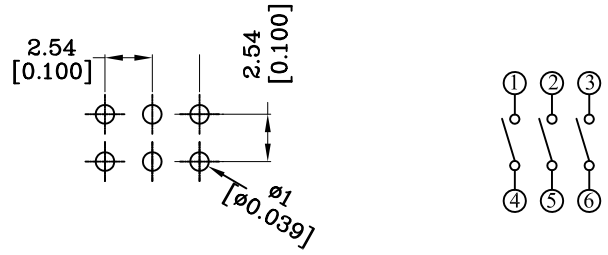
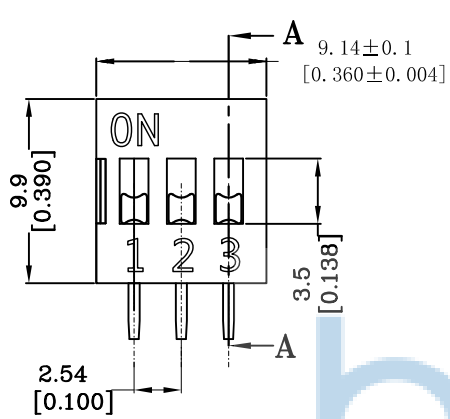



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

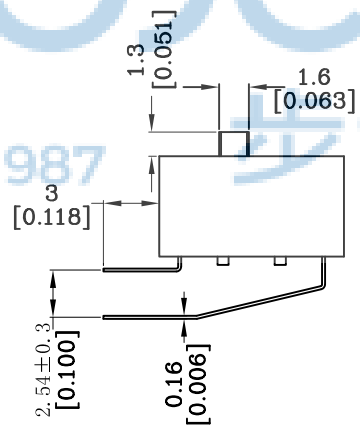

P.C.B LAYOUT

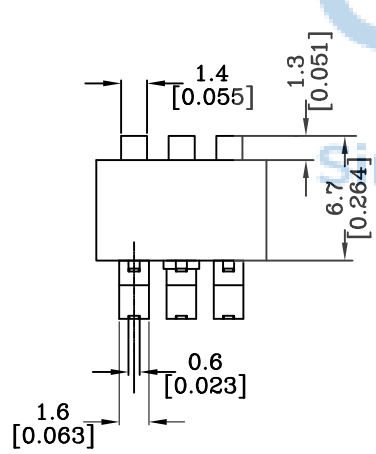

SECTION A-A

MATERIALS

BASE:UL94V-0 PBT Thermoplastic,
Color:Black
COVER:UL94V-0 PBT Thermoplastic,
Color:Red,Black,Blue
ACTUATORS:UL94V-0 PBT
Thermoplastic, Color:White
TERMINAL:Copper Alloy with gold plating

MECHANICAL

Operation Force:0.2kgf max.
Stroke:2.0mm
Operation Temp: -20°C to 70°C
Storage temp: -40°C to 85°C

ELECTRICAL

Electrical Life: 3000 operations per switch 24VDC,25mA.
Non-Switching Rating: 100mA,500VDC.
Switching Rating:25mA,24VDC.
Contact Resistance:50m max.at initial.
Insulation Resistance:(at 500VDC) 100m min.
Dielectric Strength:500VAC/1minute.
Capacitance:5PF max.
Circuit:Single pole single throw.

SOLDERING AND CLEANING PROCESSES

For best results,please followthese recommendation:
Keep all switch contacts in their "OFF" position for all operations.
WAVE SOLDERING:
Recommended solder temperature at 500°F(260°C)max 5 seconds.
HAND SOLDERING:
Use a soldering iron of 30 Watts of less,controlled at 608°F (320°C)
approximately 2 seconds while applying solder.

All DIP Switches are shipped in standar IC tube.

DA-03 PACKAGE

SERIES	NO.of POS	PER TUBE	PER BOX
DA	03	53pcs	2120pcs



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 NAME: 拨码开关 2.54-3P 宽体 90度 弯脚 DIP 红色 (DA-03)	
APPD.	JM_Zheng	PJ. NO.: DI.01.01-21-3003 SIZE: A4 DRW NO.:	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1
CHKD.	LYX		
PDWG.NO:	0048-1	DR.	SGF