


Dimensions (unit:mm)

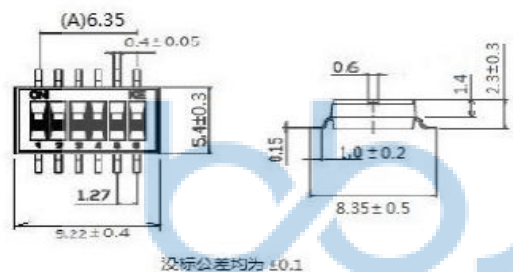

NOTES:


1. Specification:

- 1>. Operating force:1000gf Max
- 2>. Operating Temperature:-30° to+85°
- 3>. Storage Temperature:-40° to+85°
- 3>. Mechanical Lire:3000cycles minimum


2. PLATING

GOLD FLASH 1u" (min) SOLDER TALL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

P.C.B. Layout (unit:mm)



Circuitry



Number	Part Name	Material	Finished
①	Actuator	UL94 YD	White
②	Cover	UL94 YD	Black
③	Movodie	Copper Alloy	3u"Gold
④	Terminal	Bross	1u"Gold
⑤	Base	UL94 YD	Black
⑥	Terminal Contact	Bross	3u"Gold



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0048-1

DR. SGF

APPD. JM_Zheng

CHKD. LYX

NAME: 深圳市步步精科技有限公司
拨码开关 1.27-6P


PJ. NO.: DI.02.01-12-3007

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

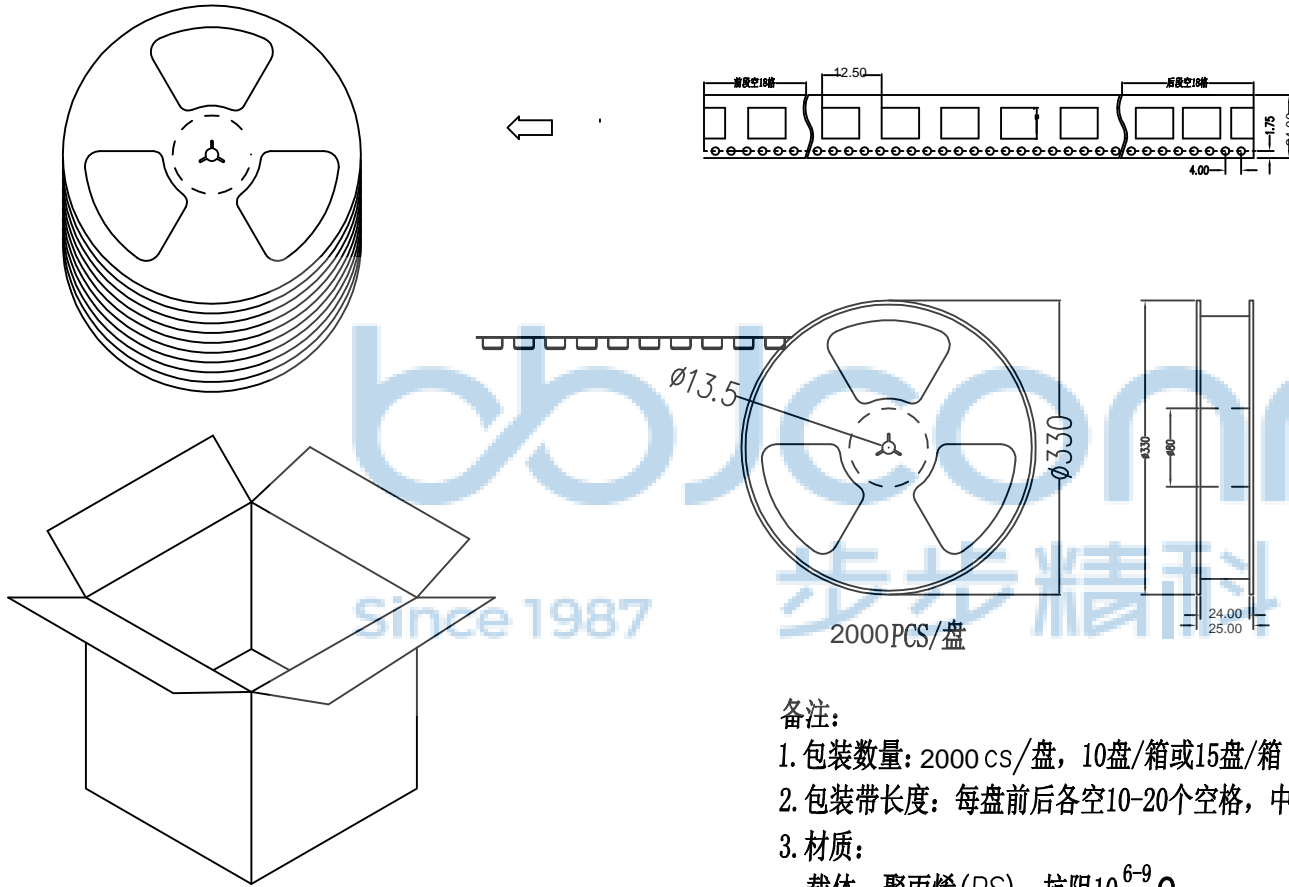

备注:

1. 包装数量: 2000 CS/盘, 10盘/箱或15盘/箱
2. 包装带长度: 每盘前后各空10-20个空格, 中间包装.
3. 材质:
载体: 聚丙烯(PS), 抗阻 $10^{6-9} \Omega$
上带: 聚乙烯(PET), 抗阻 $10^{6-11} \Omega$
卷盘: 聚苯乙烯.

纸箱规格: 345*345*23mm
纸箱规格: 345*345*35mm

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 拨码开关 1.27-6P PJ. NO.: DI.02.01-12-3007 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	
APPD.	JM_Zheng			DR. SGF	
CHKD.	LYX				
PDWG.NO:	0048-1				