


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

Dimensions (unit:mm)

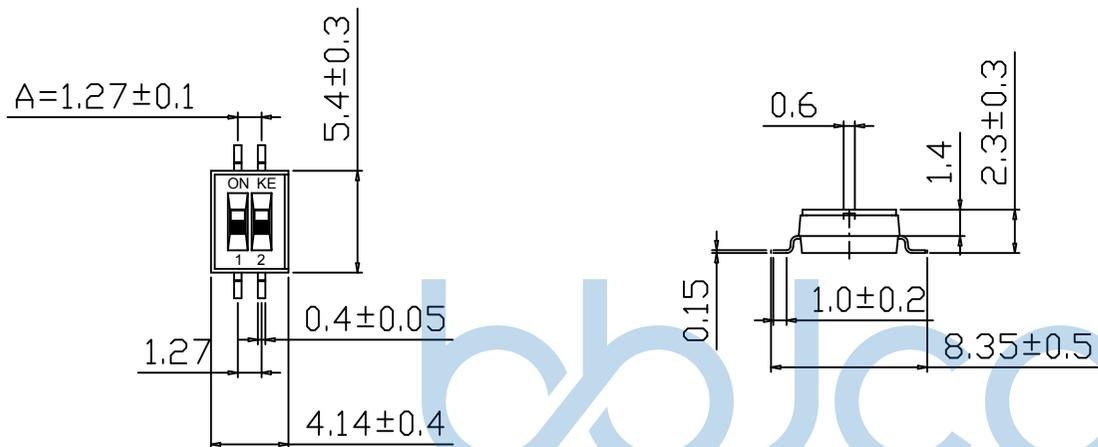

NOTES:

1. Specification:

- 1>. Operating force:1000gf Max
- 2>. Operating Temperature:-30 ° to+85 °
- 3>. Storage Temperature:-40 ° to+85 °
- 3>. Mechanical Lire:3000cycles minimum


2. PLATING

GOLD FLASH 1u"(min) SOLDERTALL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.



P.C.B.Layout (unit:mm)

Circuitry

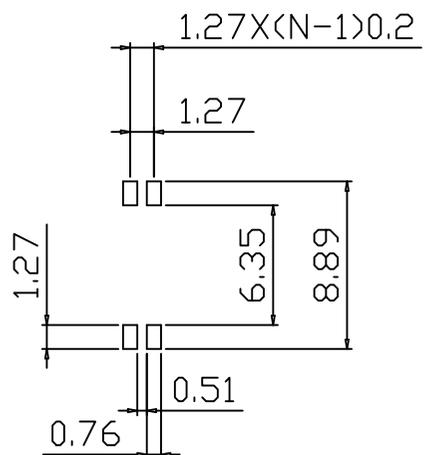

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movadic	Copper Alloy	3u"Gold
④	Terminal	Bross	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Bross	3u"Gold

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0048-1

DR. TSP

APPD. JM_Zheng

CHKD. LYX

NAME: 拨码开关 1.27-2P 平拨 贴片 黑色

PJ. NO.: D1.02.01-12-3008





SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

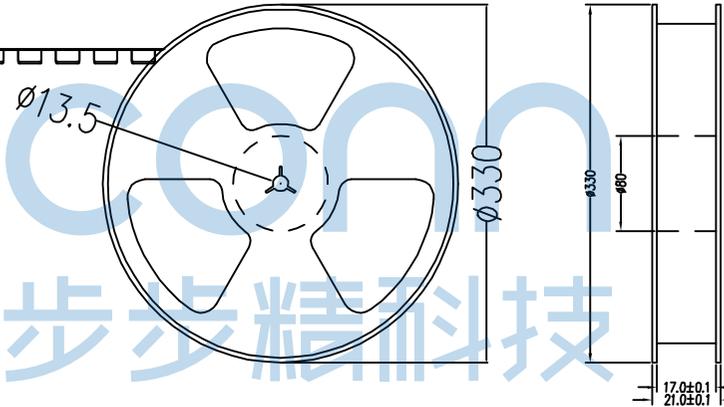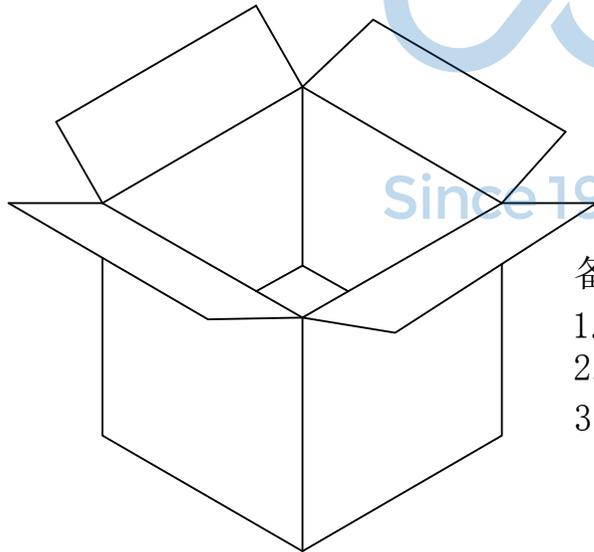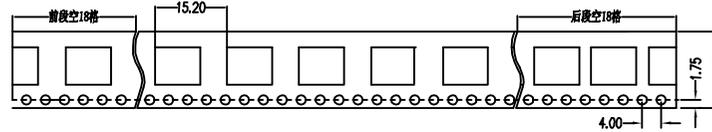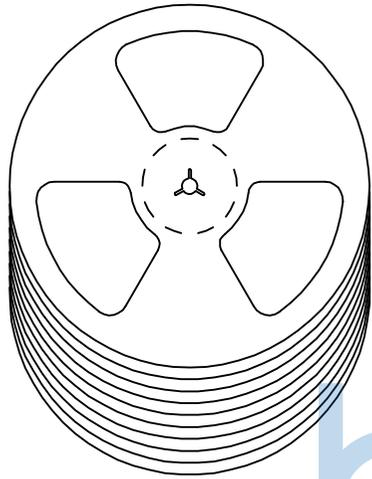

备注:

1. 包装数量: 2000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS),
上带: 聚乙烯 (PET),
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: 拨码开关 1.27-2P 平拨 贴片 黑色	
.X': ±3' .X'': ±2' .X'': ±1'		PJ. NO.: D1.02.01-12-3008	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. TSP	PDWG.NO: 0048-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	