

NOTES:


1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature:-30 to+85
- 3>.Storage Temperature:-40 to+85
- 3>.Mechanical Lire:3000cycles minimum


2.PLATING

GOLD FLASH 1u"(min) SOLDER TALL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.


Dimensions (unit:mm)

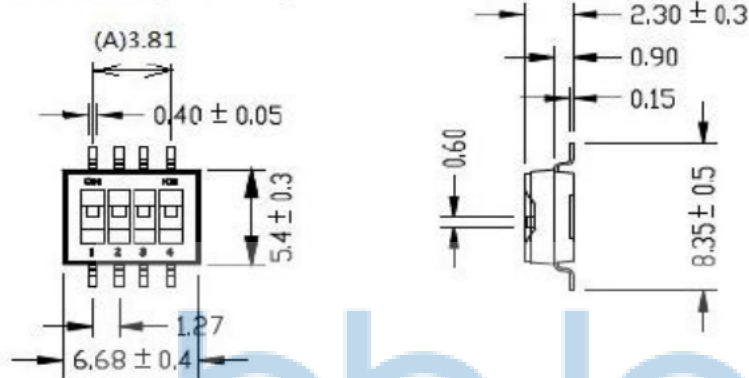

P.C.B.Layout (unit:mm)

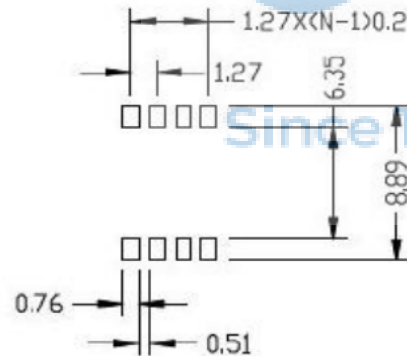

Circuitry



Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movadie	Copper Alloy	3u"Gold
④	Terminal	Bross	1u"Gold
⑤	Base	UL94 VO	Black
⑥	TerminalContact	Bross	3u"Gold



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0048-1



深圳市步步精科技有限公司

.X: ±0.38 X*: ±3"
.XX: ±0.25 .X*: ±2"
.XXX: ±0.13 .XX*: ±1"

NAME:

拨码开关 贴片 平拨 黑色 1.27-4P

APPD. JM_Zheng




PJ. NO.: DI.02.01-12-3009

CHKD. LYX

SIZE: A4 DRW NO.:

DR. SGF

FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

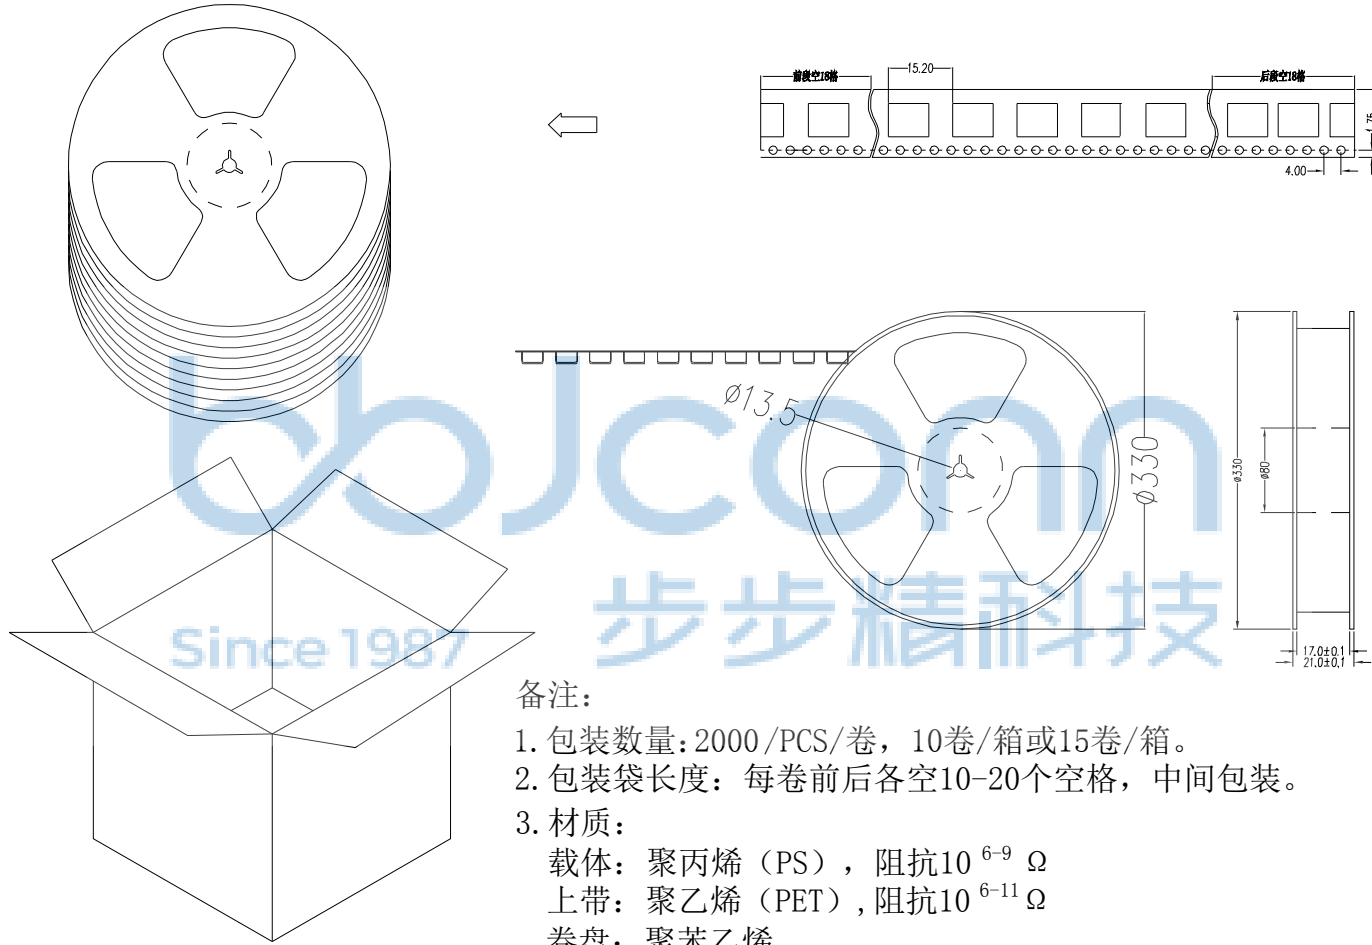

备注:

1. 包装数量: 2000 /PCS/ 卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3^*$.X*: $\pm 2^*$.XX*: $\pm 1^*$	
APPD.	JM_Zheng	NAME: 拨码开关 贴片 平拨 黑色 1.27-4P	
CHKD.	LYX	PJ. NO.: DI.02.01-12-3009	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0048-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	