


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

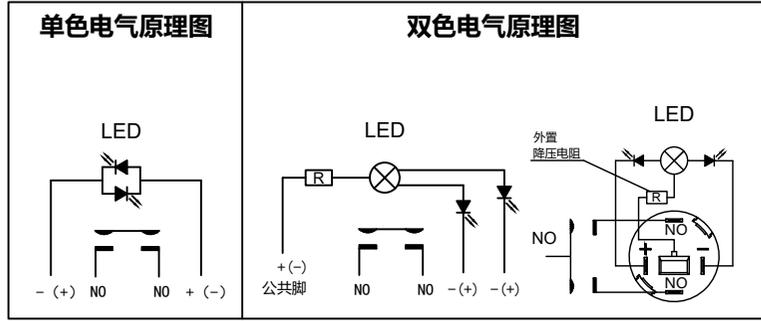

**性能参数**






发热电流:  $U_i$ :AC250V,  $I_{th}$ :5A;  
 额定电流: 3A/DC36V;  
 工作环境温度: -20°C~+55°C;  
 按压行程: 2.8mm±0.1;  
 接触行程: 1mm±0.1;  
 按压扭力: ≤4N;  
 NO脚反推扭力: ≤30N;  
 螺帽装配力矩: 5-14N.m;  
 防护等级: IP67;  
 防暴等级: IK10;  
 LED灯寿命: 40000h;  
 LED灯功耗: 约20mA以下;  
 接触电阻: ≤50mΩ;  
 绝缘电阻: ≥1000MΩ;  
 电气寿命: 100000次以上;  
 机械寿命: 500000次以上;  
 工频耐压: 1500V/1min;

**材质参数**

发光区域: PC;  
 按键: 不锈钢/铝合金氧化;  
 外壳: 不锈钢/黄铜镀镍、铬/铝合金氧化;  
 O型圈: 硅胶;  
 固定螺帽: 黄铜镀镍;  
 基座: PA66;  
 接触材料: 银合金;  
 LED引脚: H62电镀银;  
 NO引脚: H62电镀银;


**连接形式**

- 1: 线材焊接的温度及时长: 320°C±20°C, 时长3秒以下;
- 2: 可配专用接插件使用;
  - 2.1: 开关功能线材: 蓝线NO;
  - 2.2: LED功能线材: 红线正极、黑线负极、LED不分正负极;




注: 未标注公差按照GB/T1804-m级为准。

**轴视图**






**安装视图**

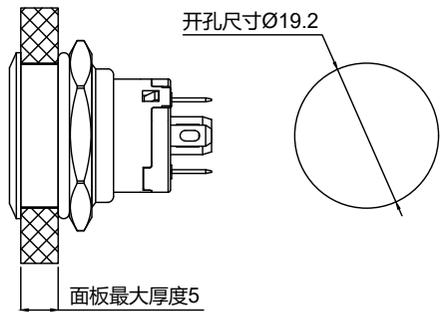

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	.X: ±0.38		X': ±3'	NAME: 金属按钮开关 19E-P10E+DY 防水IP67 无锁 不锈钢外壳 带灯 盒装			
	.XX: ±0.25		.X': ±2'				
	.XXX: ±0.13		.XX': ±1'				
	APPD. JM_Zheng		PJ. NO.: 904-071-250001-M4G				
PDWG.NO: 0771-1	DR. SGF	CHKD. LYX	SIZE: A4	DRW NO.:			
				FINISH: SEE NOTES	MAT'L.: SEE NOTES		
				SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/2

**深圳市步步精科技有限公司**

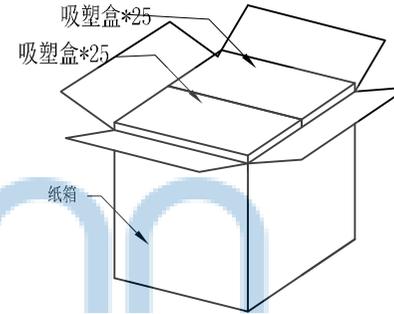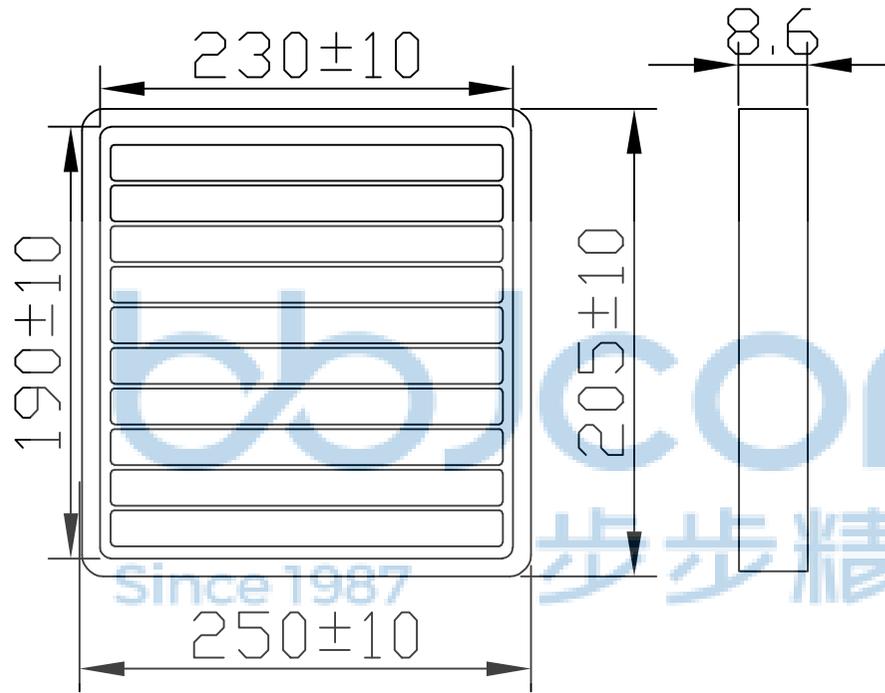

纸箱规格: 350\*210\*290

1. 包装要求:

- 1.1 每盒吸塑盒包装 50 pcs;
- 1.2 每 50 盘放一箱, 共计 2500PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .XX: ±0.25    .XXX: ±0.13 X': ±3"    .X': ±2"    .XX': ±1"		NAME: 金属按钮开关 19E-P10E+DY 防水IP67 无锁 不锈钢外壳 带灯 盒装 PJ. NO.: 904-071-250001-M4G SIZE: A4   DRW NO.: FINISH: SEE NOTES   MAT'L.: SEE NOTES SCALE: N/A   REV.: A0   UNIT: mm   PAGE: 2/2	
APPD.	JM_Zheng				
CHKD.	LYX				
PDWG.NO:	0771-1	DR.	SGF		