


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

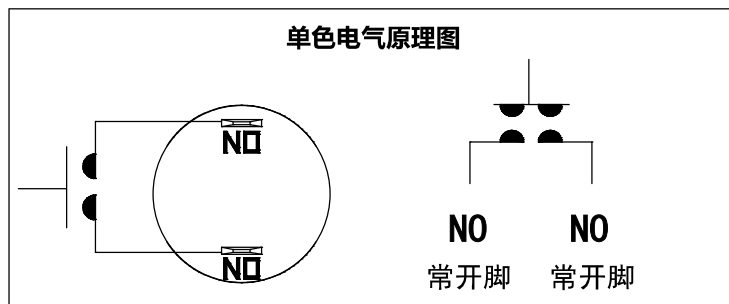

性能参数






发热电流: U_i : AC250V, I_{th} : 2A;
 额定电流: 3A/DC36V;
 工作环境温度: $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$;
 按压行程: $2.8\text{mm} \pm 0.1$;
 接触行程: $1.5\text{mm} \pm 0.1$;
 按压扭力: $\leq 3.5\text{N}$;
 NO脚反推力: $\leq 30\text{N}$;
 螺帽装配力矩: $5-14\text{N}\cdot\text{m}$;
 防护等级: IP66;
 防暴等级: IK09;
 LED灯寿命: 40000h;
 LED灯功耗: 约20mA以下;
 接触电阻: $\leq 50\text{m}\Omega$;
 绝缘电阻: $\geq 1000\text{M}\Omega$;
 电气寿命: 50000次以上;
 机械寿命: 500000次以上;
 工频耐压: 2000V/1min;

材质参数


发光区域: PC;
 按键: 不锈钢/铝合金氧化;
 外壳: 不锈钢/黄铜镀镍、铬/铝合金氧化;
 O型圈: 硅胶;
 固定螺帽: 黄铜镀镍;
 LED基座: PPT;
 C/NO/NC底座: 尼龙PA46;
 接触材料: 银合金;
 LED引脚: H62电镀银;
 C/NO/NC引脚: H62电镀金;

连接形式


1: 线材焊接的温度及时长: $320^{\circ}\text{C} \pm 20^{\circ}\text{C}$, 时长3秒以下;
 2.1: 开关功能: 1常开 金色脚开关脚

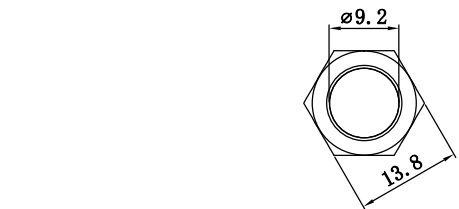

轴视图



安装视图

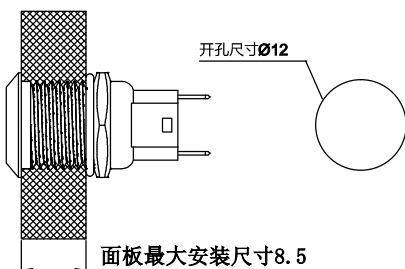

面板最大安装尺寸8.5



1	2	3	4	5	6	7	8	9	10	11
12		B	—	P	10	■ / E	▲	▼ / ◎		

1	企业名称	深圳市步步精科技有限公司
2	安装开孔	12mm
3	系列编号	A (A型号金属按钮开关)
4	头部类型	P (平头) 、 G (高头)
5	开关组合	11 (1NO、1常开)
6	操作类型	Z (自锁)
7	发光类型	E (环形) 、 DY (电源符号) 、 D (单点状) 、 E+DY (环形+电源符号) 、 E+D (环形+单点状)
8	发光颜色	R (红光) 、 G (绿光) 、 B (蓝光) 、 Y (黄光) 、 W (白光) 、 O (橙光) 、 P (紫光)
9	额定电压	AC/DC: 3V、6V、12V、24V、36V、48V、AC: 60V、110V、220V
10	外壳材质	N (黄铜镀镍) 、 S (不锈钢304本色) 、 A (铝合金氧化、默认黑色) 、 ST (不锈钢镀钛色)
11	脚位类型	Y (引脚式) 此款型号可不表达

THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co., Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 OR IN PART WITHOUT
 PRIOR WRITTEN PERMISSION.
 PDWG.NO: 0771-1

深圳市步步精科技有限公司

NAME: 金属开关 12B-P10Z-N 平头自锁无灯金属按钮开关

PJ. NO.: 904-100-230004-M4G

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES




SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1

APPD. JM_Zheng

CHKD. LYX

DR. TSP

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	

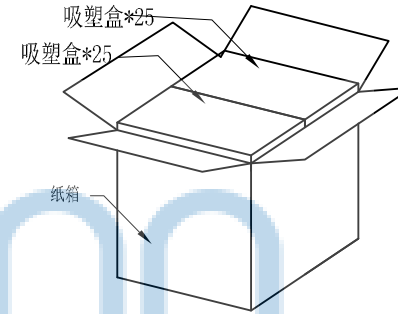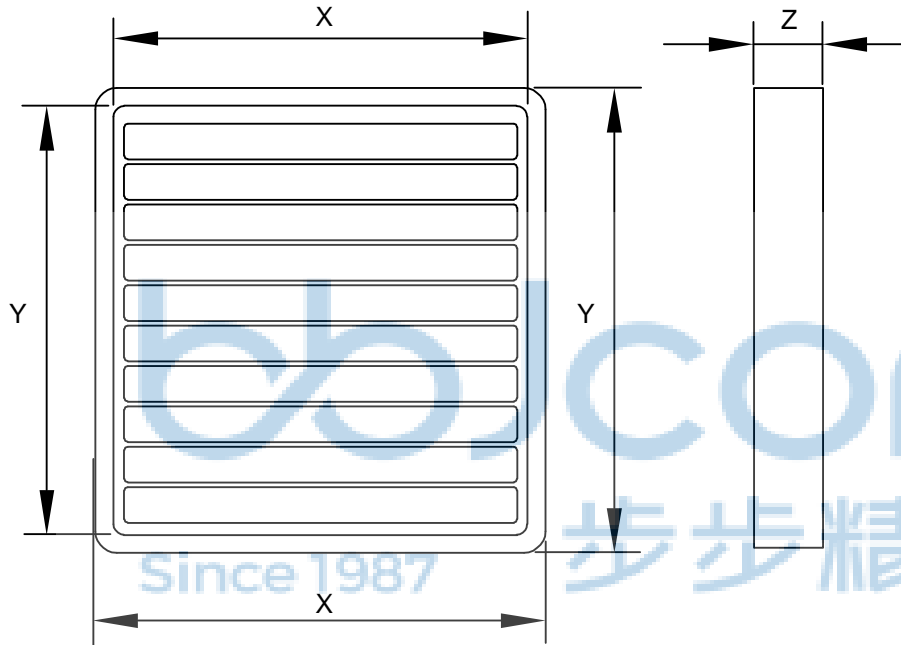

纸箱规格: 350*210*290



1. 包装要求:

- 1.1 每盒吸塑盒包装 50 pcs;
- 1.2 每 50 盘放一箱, 共计 2500PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX': ±1"		NAME: 金属开关 12B-P10Z-N 平头自锁无灯金属按钮开关	
APPD.	JM_Zheng	PJ. NO.: 904-100-230004-M4G		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0771-1	DR.	TSP	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2