





REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS

Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20mΩ Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Brass
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240° C for 30-60 seconds
 (260° C for 5 seconds)

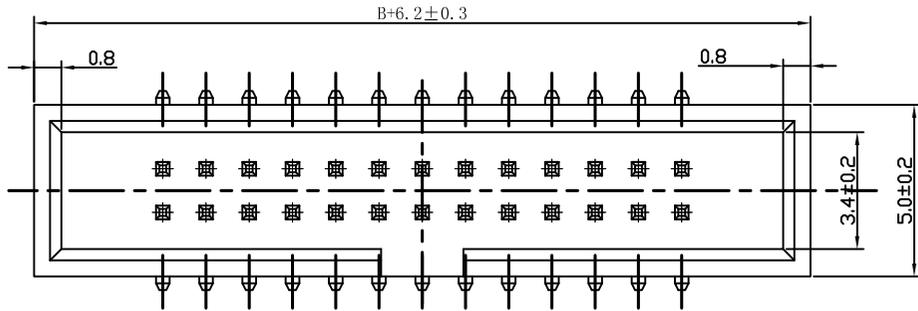

RECOMMEND P. C. B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

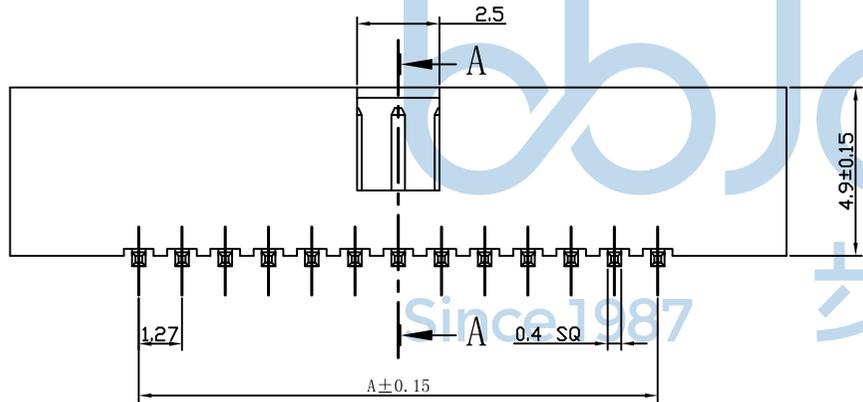

A-A SECTION



No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	2.54	3.81	26	15.24	16.51
8	3.81	5.08	30	17.78	19.05
10	5.08	6.35	34	20.32	21.59
12	6.35	7.62	40	24.13	25.40
14	7.62	8.89	44	26.67	27.94
16	8.89	10.16	50	30.48	31.75
20	11.43	12.70	60	36.83	38.10
24	13.97	15.24			

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG. NO: 0266-1

DR. TSP

APPD. JM_Zheng

CHKD. LYX

NAME: 筒牛连接器 1.27DC3 10P H4.9 SMT PC5.8 PB5.2 L6.5 6T

PJ. NO.: PH.07.32-26-6001

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1

深圳市步步精科技有限公司