





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000MΩ, Min
 Contact Resistance: 20mΩ, Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40° to+105°
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester (UL 94V-0)
 Contact Plating: Gold Flash
 Max. Processing Temp: 240° C for 30-60seconds
 (260° C for 5seconds)

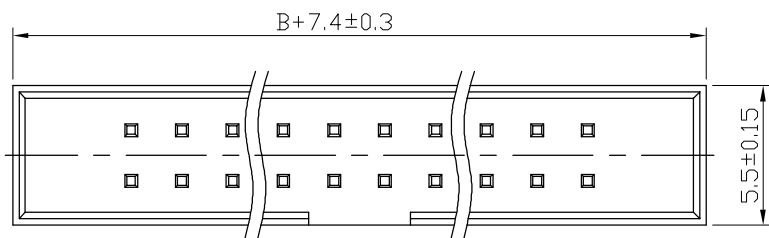

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

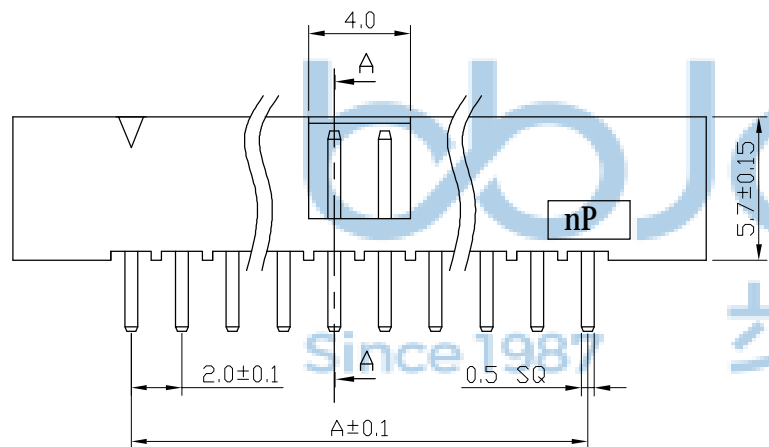

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	4.00	6.00	20	18.00	20.00	36	34.00	36.00
8	6.00	8.00	24	22.00	24.00	40	38.00	40.00
10	8.00	10.00	26	24.00	26.00	44	42.00	44.00
12	10.00	12.00	30	28.00	30.00			
14	12.00	14.00	34	32.00	34.00			
16	14.00	16.00	36	34.00	36.00			
18	16.00	18.00	40	38.00	40.00			

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.No: 0266-1

深圳市步步精科技有限公司

.X: ±0.38	X': ±3'	NAME:	筒牛连接器 2.0DC3 10P H5.7 180度 PC2.8 L8.3 6T
.XX: ±0.25	.X': ±2'	APPD.	JM_Zheng
.XXX: ±0.13	.XX': ±1'	CHKD.	LYX
DR.	TSP	FINISH:	SEE NOTES
		SCALE:	N/A
		REV.:	A0
		UNIT:	mm
		PAGE:	1/1