





REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

### SPECIFICATIONS

Current Rating: 1.5 Amps  
 Insulation Resistance: 1000MΩ, Min  
 Contact Resistance: 20mΩ, Max  
 Withstanding Voltage: AC 500V  
 Operation Temperature: -40° to+105°  
 Contact Material: Brass  
 Standard: PA6T  
 Insulator Material: Polyester(UL 94V-0)  
 Contact Plating: Gold Flash  
 Max. Processing Temp: 240° C for 30-60seconds  
 (260° C for 5seconds)

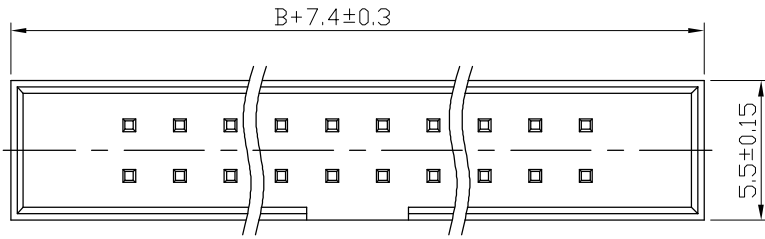

RECOMMEND P.C.B LAYOUT  
 PCB TOLERANCE: ±0.05 (TOP VIEW)

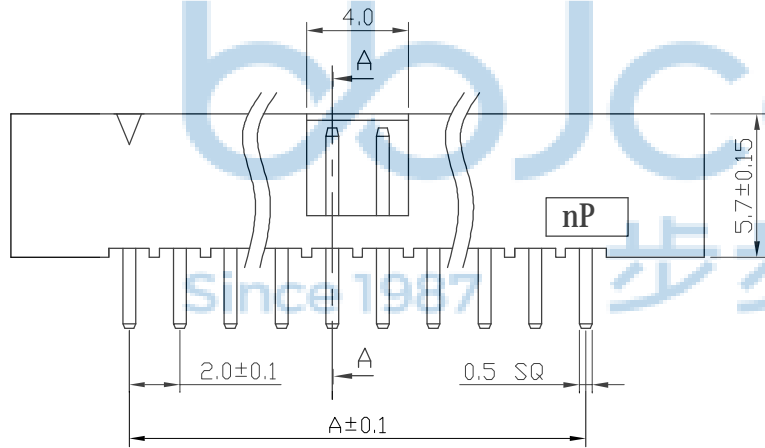

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	4.00	6.00	20	18.00	20.00	36	34.00	36.00
8	6.00	8.00	24	22.00	24.00	40	38.00	40.00
10	8.00	10.00	26	24.00	26.00	44	42.00	44.00
12	10.00	12.00	30	28.00	30.00			
14	12.00	14.00	34	32.00	34.00			
16	14.00	16.00	36	34.00	36.00			
18	16.00	18.00	40	38.00	40.00			

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX': ±1"		NAME: 筒牛连接器 2.0DC3 6P H5.7 180度 PC2.8 L8.3 6T	
APPD.	JM_Zheng	PJ. NO.: PH.09.12-26-6001 SIZE: A4 DRW NO.:		FINISH: SEE NOTES MAT'L.: SEE NOTES	
CHKD.	LYX	SCALE: N/A		REV.: A0	UNIT: mm
PDWG. NO:	0266-1	DR.	SGF	PAGE: 1/1	