

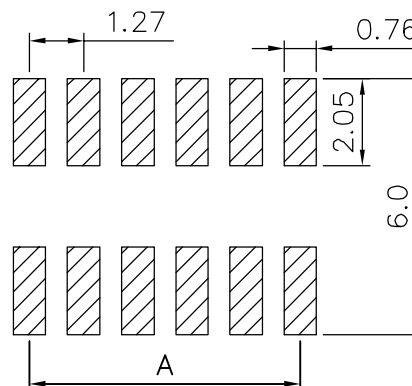
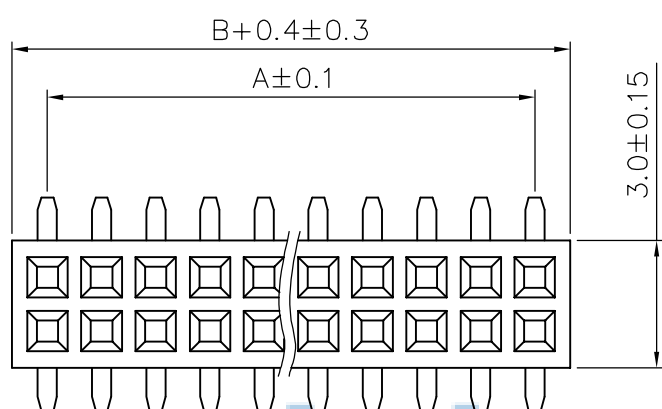


SPECIFICATIONS

Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20 mΩ Max
Operation Temperature: -40° to +105°
Insulator Material: Polyester (UL94V-0)
Contact Material: Phosphor bronze
Standard: PA6T
Contact Plating: Gold Flash
Max. Processing Temp: 240° C for 30-60 seconds
 (260° C for 5 seconds)







RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE: ±0.05 (TOP VIEW)

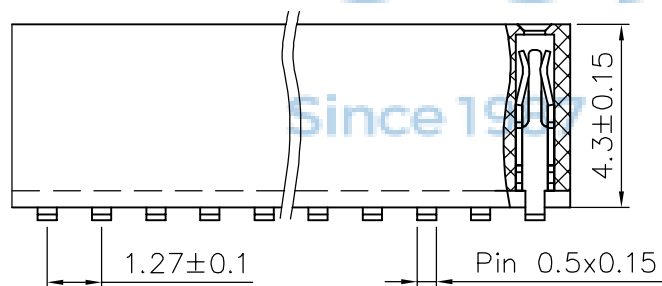

No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B
1	—	—	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07
2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34
3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61
4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88
5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15
6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42
7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69
8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96
9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50

THIS DOCUMENT IS THE
 SOLE PROPERTY OF
 BBJconn Technology Co., Ltd.
 Corporation AND SHOULD
 NOT BE USED IN WHOLE
 OR IN PART WITHOUT
 PRIOR WRITTEN PERMISSION.
 PDWG. NO.: 0266-1

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3° X*: ±2° .XX*: ±1°
APPD. JM_Zheng	NAME: 排母 1.27FH H4.3 2x4P SMT PC4.8 U型 6T 贴膜编带
CHKD. TSP	PJ. NO.: FH.03.22-23-3004
DR. LYX	SIZE: A4 DRW NO.:
	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

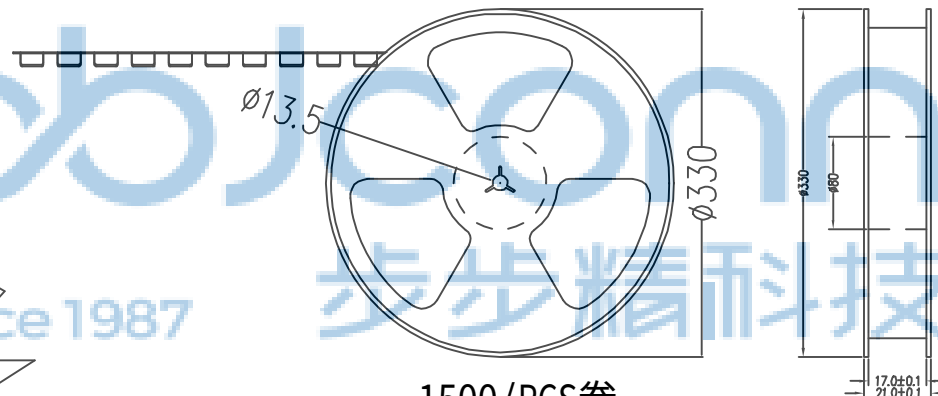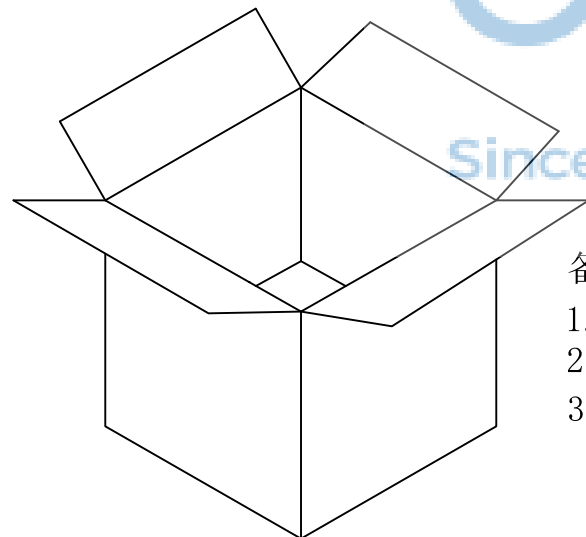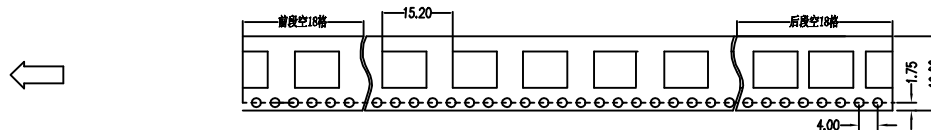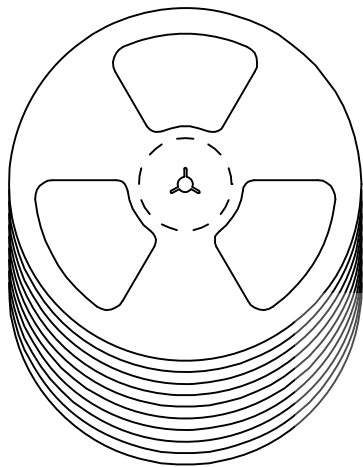

1500/PCS卷

备注:

1. 包装数量: 1500/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" .X': ±2" .XX': ±1"		NAME: 排母 1.27FH H4.3 2x4P SMT PC4.8 U型 6T 贴膜编带			
APPD.	JM_Zheng	23/05'02	P.J. NO.: FH.03.22-23-3004		SIZE: A4		
CHKD.	TSP	23/05'02			DRW NO.:		
PDWG.NO: 0266-1		DR.	LYX	23/05'02	FINISH: SEE NOTES		MAT'L.: SEE NOTES
				SCALE: N/A	REV.: A3	UNIT: mm	PAGE: 1/1