

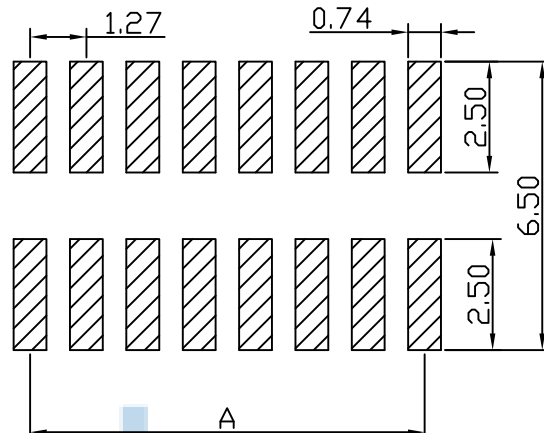
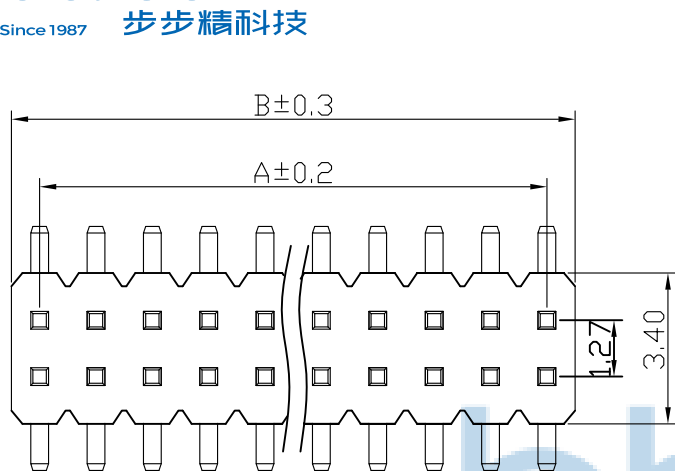


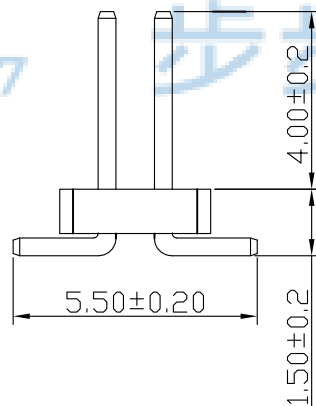

RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ± 0.05 (TOP VIEW)

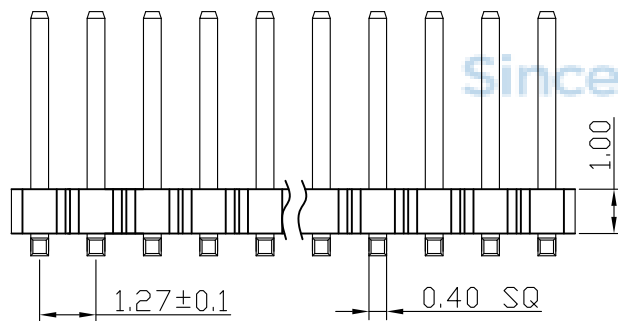

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
1	—	—	11	12.70	13.97	21	25.40	26.67	31	38.10	39.37	41	50.80	52.07
2	1.27	2.54	12	13.97	15.24	22	26.67	27.94	32	39.37	40.64	42	52.07	53.34
3	2.54	3.81	13	15.24	16.51	23	27.94	29.21	33	40.64	41.91	43	53.34	54.61
4	3.81	5.08	14	16.51	17.78	24	29.21	30.48	34	41.91	43.18	44	54.61	55.88
5	5.08	6.35	15	17.78	19.05	25	30.48	31.75	35	43.18	44.45	45	55.88	57.15
6	6.35	7.62	16	19.05	20.32	26	31.75	33.02	36	44.45	45.72	46	57.15	58.42
7	7.62	8.89	17	20.32	21.59	27	33.02	34.29	37	45.72	46.99	47	58.42	59.69
8	8.89	10.16	18	21.59	22.86	28	34.29	35.56	38	46.99	48.26	48	59.69	60.96
9	10.16	11.43	19	22.86	24.13	29	35.56	36.83	39	48.26	49.53	49	60.96	62.23
10	11.43	12.70	20	24.13	25.40	30	36.83	38.10	40	49.53	50.80	50	62.23	63.50


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

SPECIFICATIONS


Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 20m Ω Max
 Operation Temperature: -40° to +105°
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Brass
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240° C for 30-60 seconds
 (260° C for 5 seconds)



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X': $\pm 3'$ X'': $\pm 2'$ XX': $\pm 1'$	
APPD. JM_Zheng		NAME: 排针 1.27PH H1.0 2x7P SMT PC5.5 PA4.0 PB1.5 L7.2 6T 0.4针 波浪型胶芯 加盖编带	
CHKD. LYX		PJ. NO.: PH.03.32-13-6011	
DR. ZY		SIZE: A4 DRW NO.:	
PDWG.NO: 0266-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

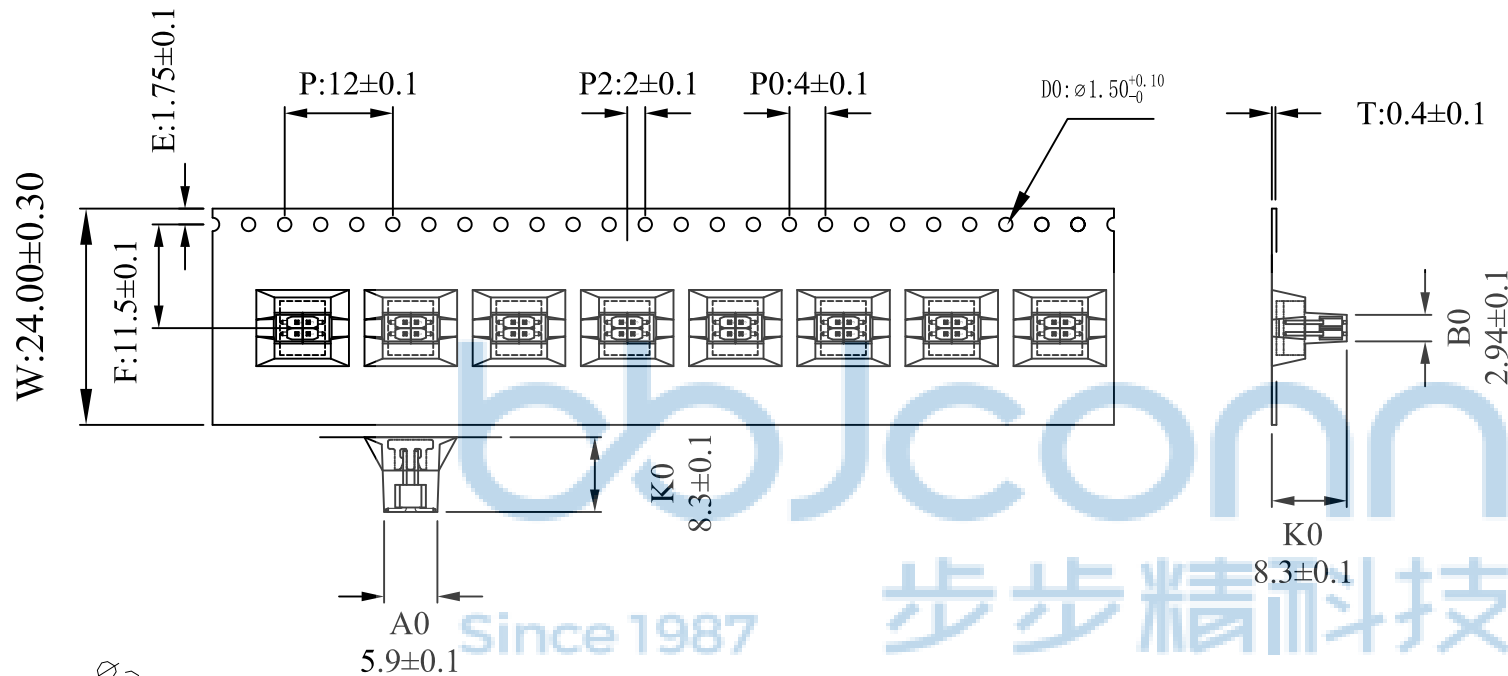

W	24.00±0.3
F	11.50±0.1
T	0.40±0.05
E	1.75±0.1
P	12.00±0.1
P0	4±0.1
P2	2±0.1
A0	5.60±0.1
B0	2.94±0.1
K0	8.30±0.1
D0	1.50 ^{+0.1} ₀

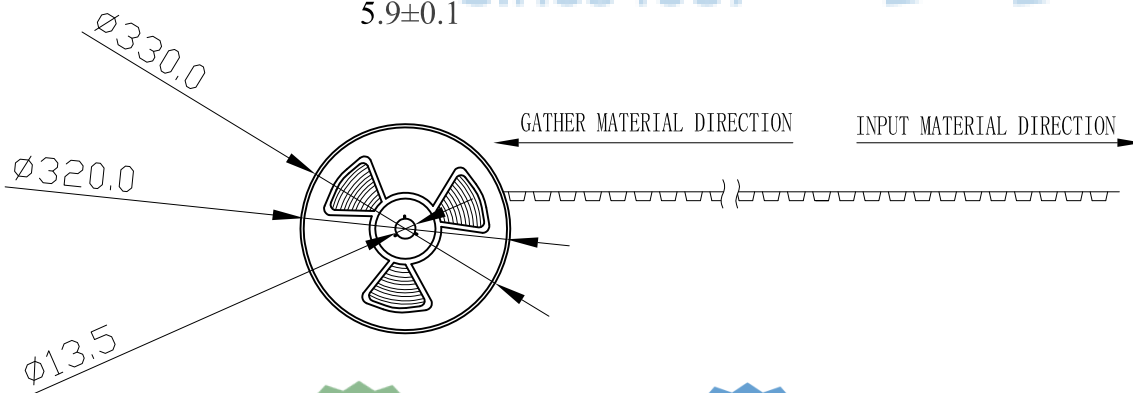

料号		载带宽度	W24	载带长度	7.68米
数量	800pcs/卷	装箱数量		卷盘外径	330mm/13寸
留空	20-600-20	上带规格	21.3mm*200米	冷封/热封	冷封
模具		下带颜色	雾透	下带材质	PS



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0266-1	DR. ZY	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3" X': ±2" XX': ±1"	NAME: 排针 1.27PH H1.0 2x7P SMT PC5.5 PA4.0 PB1.5 L7.2 6T 0.4针 波浪型胶芯 加盖编带 PJ. NO.: PH.03.32-13-6011 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2