
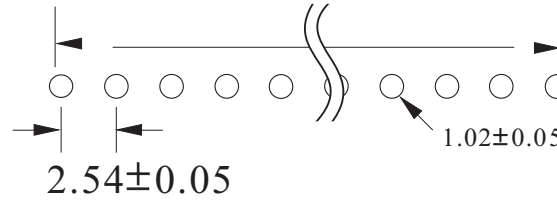




REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

Dim.L1

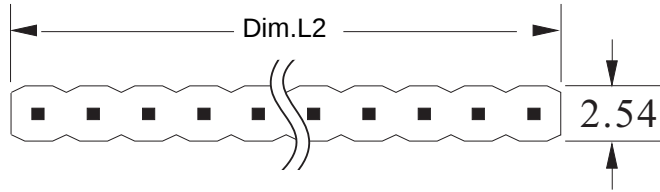

Specifications

Current Rating : 2 Amps
Insulator Resistance : 1000 Megohms min.
Contact Resistance : 20 m ohms max.
Dielectric Withstanding : AC 500V
Operating Temperature : -40°C ~ +105°C
Contact Material : Phosphor Bronze
Insulator Material : Polyester, UL 94V-0 Nylon-PA6T
Contact Plated : See Option
Standard: Full Gold Flash

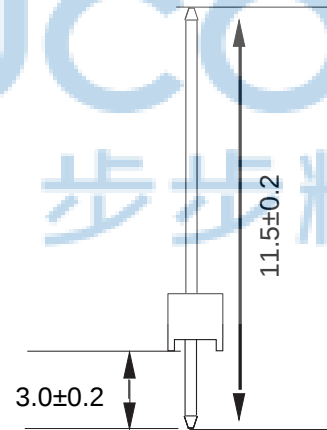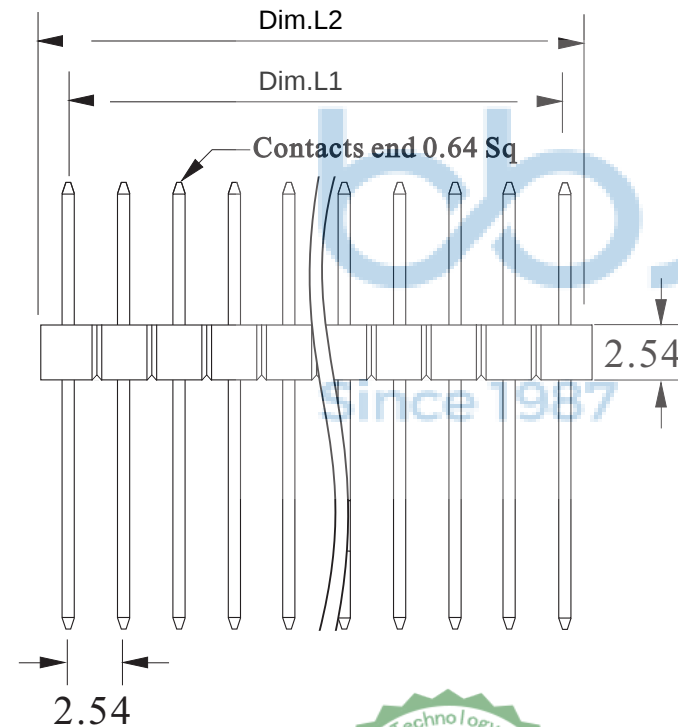

Cir- cuits	Dimension (mm)	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.6



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'		NAME: 排针 PH2.54 H2.54 1x4P 180度 PC3.0 PA5.96 PB2.54 L11.5 6T 打K点	
APPD.	JM_Zheng	PJ. NO.: PH.05.11-41-6035		SIZE: A4 DRW NO.:	
CHKD.	LYX	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO:	0026-1	DR.	SGF	SCALE: N/A	REV.: A0 UNIT: mm PAGE: 1/1