

SPECIFICATIONS

Current Rating: 2A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: $30\text{m}\Omega$ Max.




Insulation Resistance: $1000\text{M}\Omega$ MIN.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/G/F Au plated



Material: PA6T UL94V-0

Color: BLACK

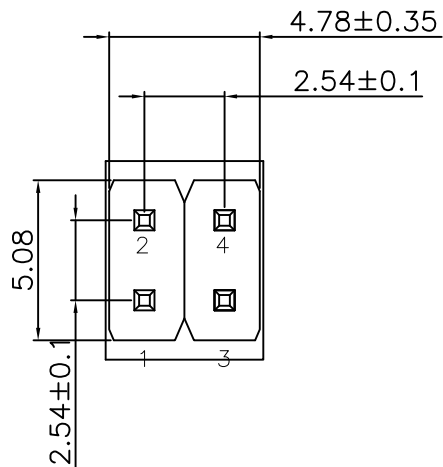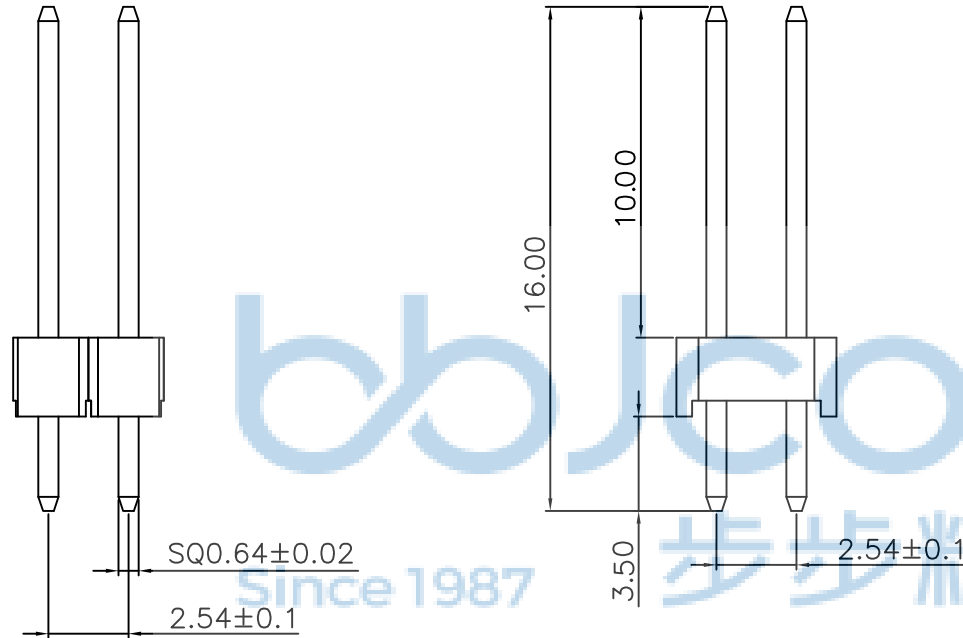

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司		NAME: 排针 PH2.54 H2.5 2x2P 180度 PC3.5 PA10.00 PB2.50 L16.0 PAGT	
APPD. JM_Zheng		.X: ± 0.38 .X': $\pm 3'$.XX: ± 0.25 .X': $\pm 2'$.XXX: ± 0.13 .X': $\pm 1'$		PJ. NO.: PH.05.12-43-7001	
CHKD. LYX		DR. SGF		SIZE: A4 DRW NO.:	
PDWG.NO: 0465-1		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A		REV.: A0	
		UNIT: mm		PAGE: 1/2	

PE袋规格:***X*** (以实际出货为准)

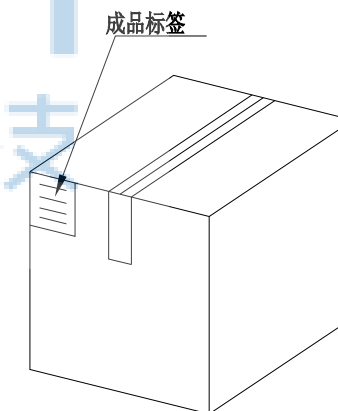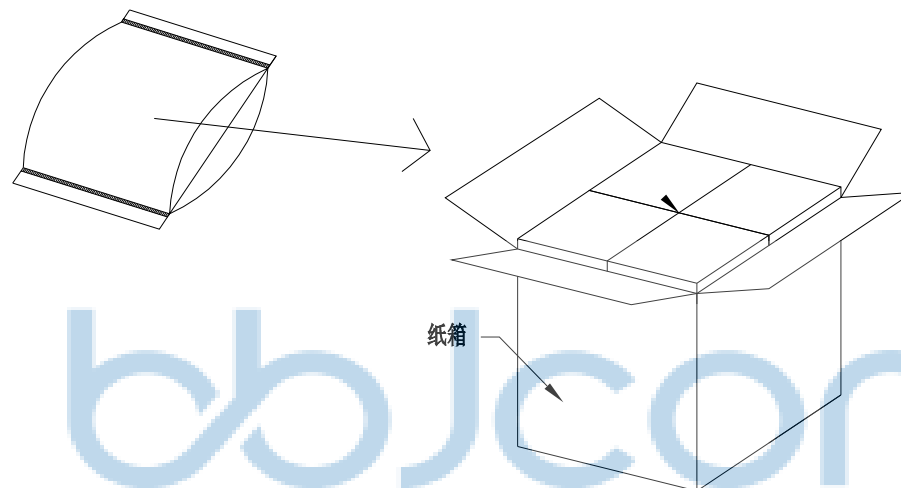

1. 包装要求:

- 1.1 每PE袋包装1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
NAME:		排针 PH2.54 H2.5 2x2P 180度 PC3.5 PA10.00 PB2.50 L16.0 PA6T	
APPD. JM_Zheng		PJ. NO.: PH.05.12-43-7001	
CHKD. LYX		SIZE: A4 DRW NO.:	
PDWG.NO: 0465-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	