




REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO				

NOTES:

1. ELECTRICAL:
- 1-1. CONTACT CURRENT RATING :
5A(VBUS PIN 1.5A/PIN),
5A(GND PIN 1.25A/PIN MAX),0.25A/PIN(OTHER PIN).
 - 1-2. INSULATION RESISTANCE :
100 MEGAOHMS MIN. AT 250VDC.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE :
100VAC MIN.
 - 1-4. LOW LEVEL CONTACT RESISTANCE :
INITIAL 40mΩ MAX.
AFTER 50mΩ MAX.
 - 1-5. Voltage Rating: 20V Max.
2. MECHANICAL CHARACTERISTICS :
- 2-1. MATING FORCE: 5~20N.
 - 2-2. UNMATING FORCE: 8~20N(INITIAL), 6~20N(AFTER 10000 CYCLES);
 - 2-3. DURABILITY : 10,000 MATING CYCLES.
 - 2-4. OPERATING TEMPERATURE : -40°C TO +80°C
 - 2-5. Salt Spray Test: 48H Min. (No oxidation or rust).

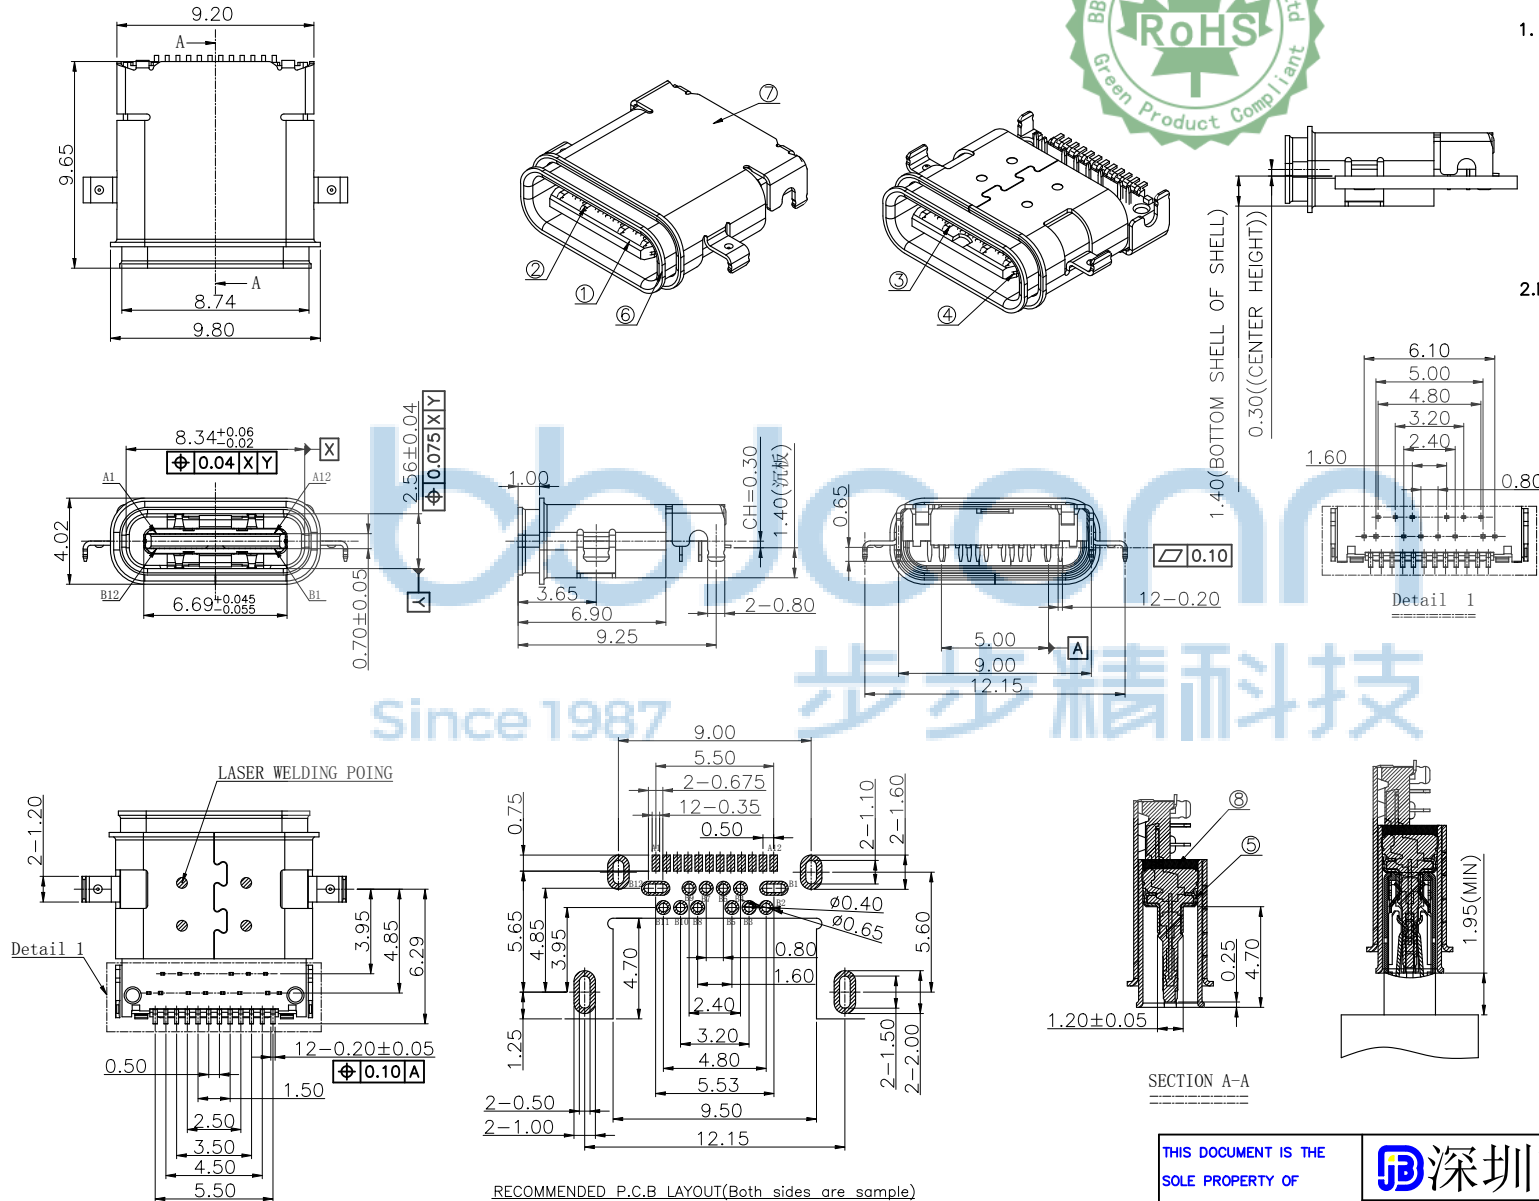

RECOMMENDED P.C.B LAYOUT(Both sides are sample)
Tolerance:±0.05,Thickness=0.60mm

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0541-1


 深圳市步步精科技有限公司

.X: ±0.38 .X': ±3" .XX: ±0.25 .X': ±2" .XXX: ±0.13 .XX': ±1"		NAME: TYPE-C 24P 防水母座 四脚插 L=9.65 CH=0.30 沉板1.4 端子DIP+SMT IPX7			
APPD.	JM_Zheng		PJ. NO.: 126-223-240001-X7G		
CHKD.	TSP		SIZE: A4	DRW NO.:	
DR.	LYL 2	FINISH: SEE NOTES		MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A0	UNIT: mm	PAGE: 1/3

加防水圈图

建议密封方式


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

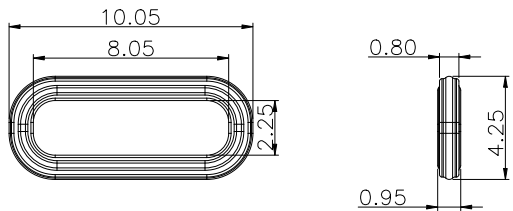


建议防水圈规格（材质硅橡胶）



机壳面板




密封圈



PCB板

前后组装方式 ①

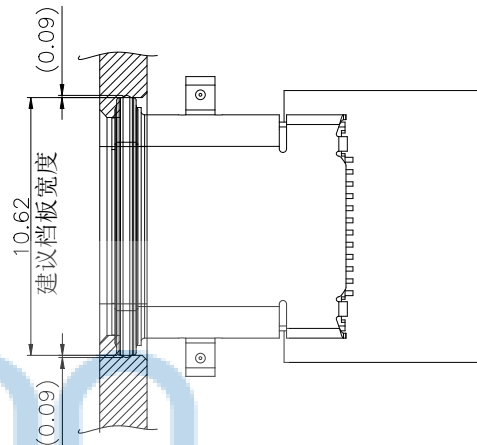

机壳面板对密封圈与缩量0.30Min

密封圈

PCB板

建议档板宽度

4.86

1.45(REF)



组装面板后公母头对插示意图 ②



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0541-1		NAME: TYPE-C 24P 防水母座 四脚插 L=9.65 CH=0.30 沉板1.4 端子DIP+SMT IPX7	
APPD. JM_Zheng	CHKD. TSP	PJ. NO.: 126-223-240001-X7G	SIZE: A4 DRW NO.:
DR. LYL		FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0 UNIT: mm PAGE: 2/2



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

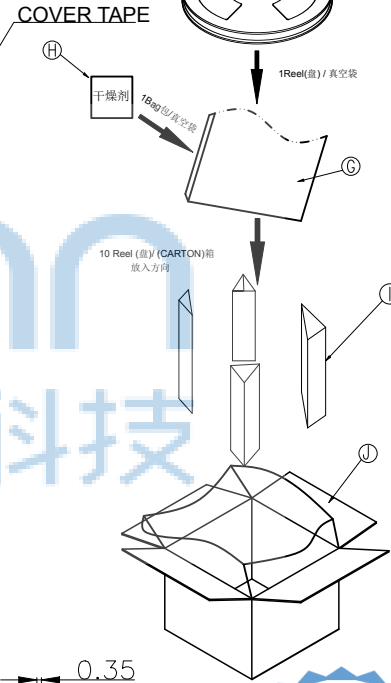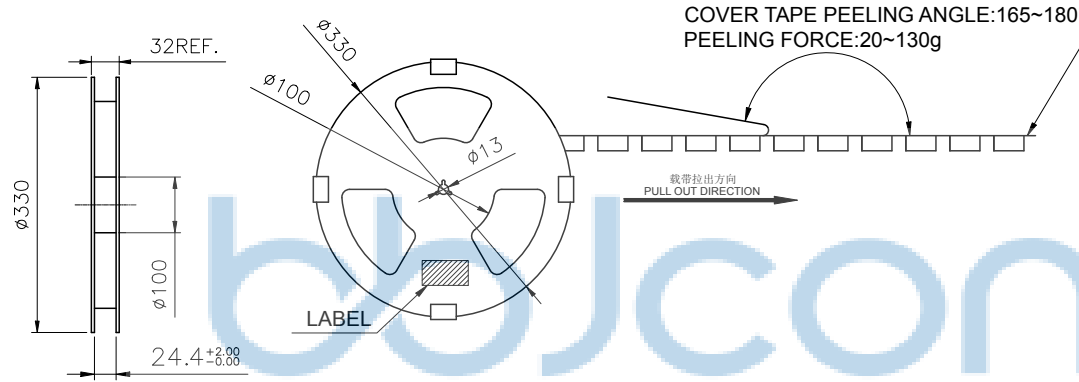

包装方式:

第一步: 产品使用包装机入包装盘

- (1) 首先将包装盘贴上标签
- (2) 再将成品按照规定的所示方向摆放于料带中进行包装
- (3) 每盘包装数量700PCS成品

第二步: 包装盘入外箱

- (1) 将包装完的包装盘每1盘装入1个真空袋中
- (2) 每个真空袋中放入一包干燥剂, 并做真空包装处理
- (3) 将10个真空袋, 共10盘/7000PCS放入置入外箱的PE袋中



第三步: 外箱封口及贴标签

- (1) 先确认外箱里是否有10盘产品
- (2) 包装完成后使用透明胶带封口, 贴LABEL于规定的位置

第四步: 储存&运输

- (1) 储存在通风, 干燥环境; 搬运时轻拿轻放

防水胶圈包装(两者独立包装)

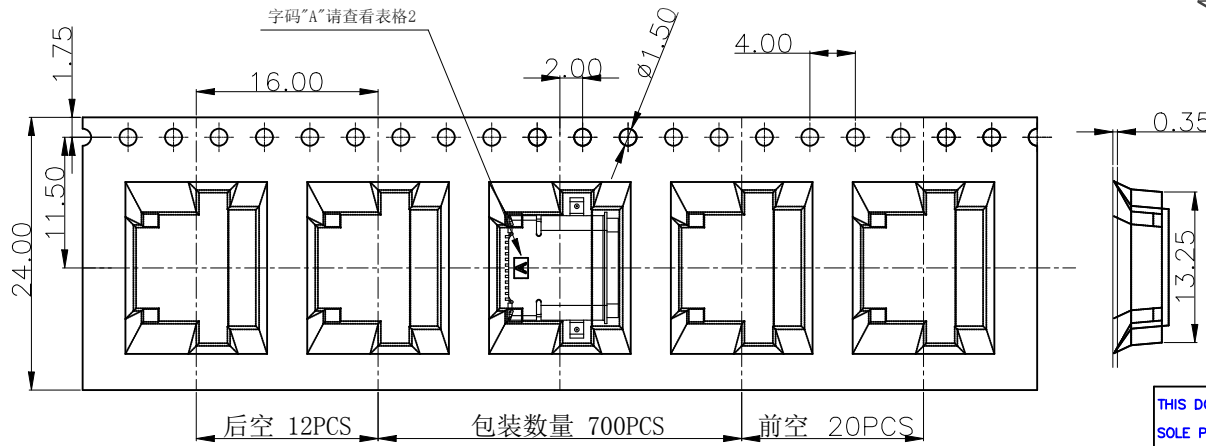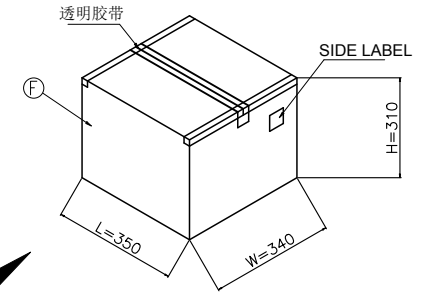

表格1:

J	PE袋	1	630L*620W
I	三角护柱	4	
H	干燥剂	10	
G	真空袋	10	500L*450W
F	纸箱	1	PE0039(350L*340W*310H)
E	标签	10	
D	REEL	10	
C	COVER TAPE	10	PS0090
B	CARRIER TAPE	10	PB0257
A	TYPE C	7000	见表格2
NO	DESCRIPTION	Q'TA(PCS)	SPEC

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG,NO: 0541-1

深圳市步步精科技有限公司

.X: ±0.38 .X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .X': ±1'

NAME: TYPE-C 24P 防水母座 四脚插 L=9.65
CH=0.30 沉板1.4 端子DIP+SMT IPX7

APPD. JM_Zheng
CHKD. TSP
DR. LYL

PJ. NO.: 126-223-240001-X7G
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A0 UNIT: mm PAGE: 3/3